



Trend Pool



# Trend Pool Pool Equipment Box & Wall

Your pool equipment, perfectly housed!

Ready-to-connect equipment units for professional pool projects - pre-assembled, carefully engineered and individually customizable.



Ready-to-connect  
complete solution



Significant  
time savings






High-quality  
components



Compact  
design



Individually  
customizable

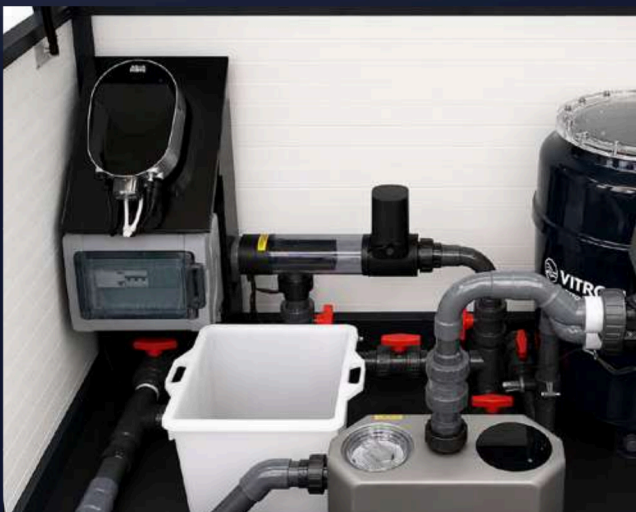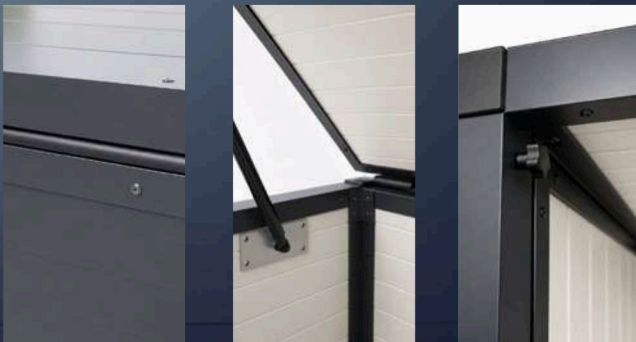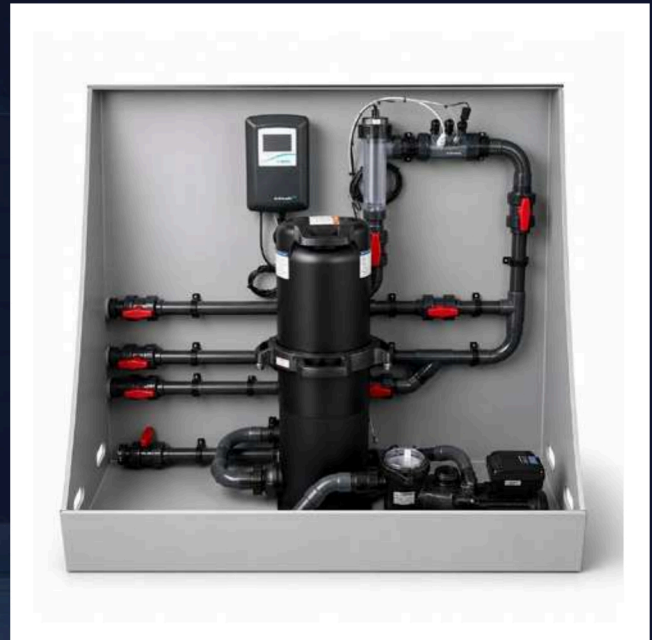

### STANDARD CONFIGURATION:

- Ø 63 mm suction line | 2x outlet lines
- Ø 50 mm pressure side | 2x inlet lines
- Heat pump bypass
- Water treatment bypass
- Incl. fuse box and two double sockets
- Incl. Bayrol grounding kit
- Incl. VITROS safety catch tray (where feasible, usually 1x)
- Incl. Trend fibreglass

### NOT INCLUDED AS STANDARD OPTIONAL AT NO EXTRA COST

- Ø 50 mm drain line, rigidly piped
- Transparent non-return valve (installed in prefabricated equipment units)

The number of suction and pressure lines can be adjusted individually, subject to feasibility.

When the Premium XL equipment box is selected, all piping is installed in Ø 63 mm. For all other equipment units, Ø 63 mm piping is available on request.