




ITX-B305_N126L

- Intel® Alder Lake N97 / N100 / N305
- 1* SODIMM DDR4 slot
- 1* SATA3.0, 1* mSATA, 1 * M.2 SSD port
- 1* HDMI, 1 * VGA, 1* LVDS/ EDP
- 2* LAN, 6 * RS232(2* RS485/ RS422), 2* USB3.0, 6* USB2.0
- 1* M.2 WiFi, 1* M.2 5G slot
- 170 x 170mm
- DC 12V

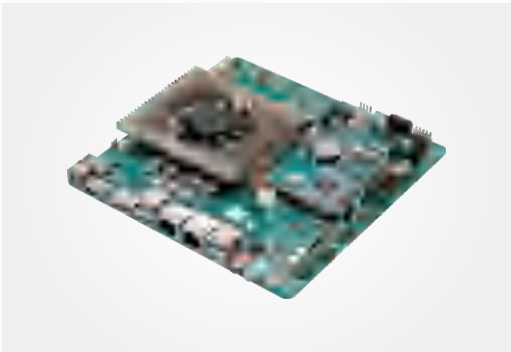


ITX-YS140R1_I526L

- Intel® Meteor Lake Core™ Ultra 5 125H, 14 cores CPU, TDP 28W
- 2*SODIMM DDR5 RAM slots, 5600MHz, up to 96GB
- 2* RTL8111H GbE LAN
- 1* HDMI, 1* DP, 1* LVDS (EDP / LVDS selectable via jumper)
- 4* USB3.0, 4* USB2.0, 6* RS232(2* RS485, 2* RS422)
- 1* M.2 support PCIE X4 SSD, 1* M.2 WiFi
- 170 x 170mm
- DC 12V



ITX-YS610R1

- H610 Chipset, support Intel® LGA1700 12th/ 13th/ 14th Gen CPU
- 2* SODIMM DDR4 slots
- 2* SATA3.0 slots , 1* M.2 SSD port
- 1* HDMI1.4, 1* DP, 1* LVDS
- 2* LAN, 6* RS232 (1* RS485/ RS422), 4* USB3.0 (5Gbps), 4* USB2.0
- 1* M.2 WiFi slot
- 170 x 170mm
- DC 19V

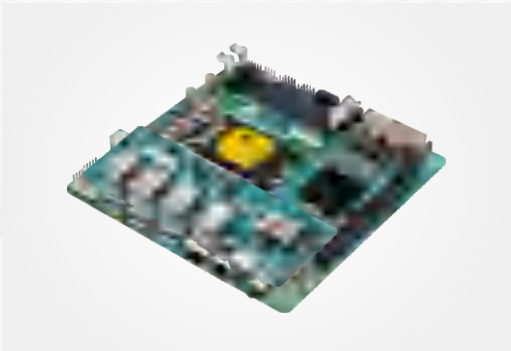

VS590+VS250-U8

- Support Intel® LGA1151 / LGA1200 / LGA1700 6th ~ 13th Gen CPU
- 2* SODIMM DDR4 RAM slots, up to 128GB
- 1* VGA, 1* HDMI
- 2* LAN (Intel® I210AT)
- 1* M.2 SSD slot
- 1* PCIE3.0 X16 slot
- 6* USB3.0 + 8* USB3.0 expansion (2A)
- 170 x 170mm
- ATX power supply



VS391M +VS250-P4

- Intel® Z390 chipset, support LGA1151 8th/9th Gen CPU
- 4* DDR4 DIMM RAM slots, up to 64GB
- 1* VGA, 2* HDMI1.4
- 2*LAN (Intel® I210AT)+ 4* POE expansion
- 4* SATA3.0, 1* M.2 SSD port
- 1* PCIE3.0 X16, 1* PCIE3.0 X4, 5* PCI
- 6* USB3.0, 5*USB2.0, 6* RS232(2*RS485/RS422)
- ATX power supply



EPIC-EH305_N126L

- Intel® Alder Lake N97 / N100 / N305
- 1* SODIMM DDR4 slot
- 1* 7pin SATA, 1* MSATA SSD port
- 2* HDMI1.4, 1* LVDS/ EDP
- 2* LAN, 4* USB3.0, 3* USB2.0, 6* RS232 (2* RS485/ RS422)
- 1* M.2 WiFi slot
- 148 x 102mm
- DC 12V




STX-T97_2L

- Onboard Intel® Alder Lake-N N97
- 1* SODIMM DDR4 slot, up to 32GB
- 2* LAN (RTL8111H)
- 1* VGA, 1* HDMI, 1* LVDS / EDP port
- 2* USB3.0, 2* USB2.0, 1* RJ45 RS232, 1* RS232 pin port
- 1* PS/2, 1*TPM
- 120 x 120mm
- DC 12V




AI58J

- Rockchip® RK3588, NPU, up to 6 TOPS
- Onboard LPDDR4 8GB memory, eMMC 64G SSD
- 1* SATA3.0 hard disk port
- 1* HDMI-OUT, 1* HDMI-IN, 1* EDP, 1* LVDS, V-BY-ONE port
- 2* LAN, 2* USB3.0, 4* USB2.0, 6* RS232 (2* RS485)
- Onboard WiFi6/BT chipset
- 148 x 102mm
- DC 12V

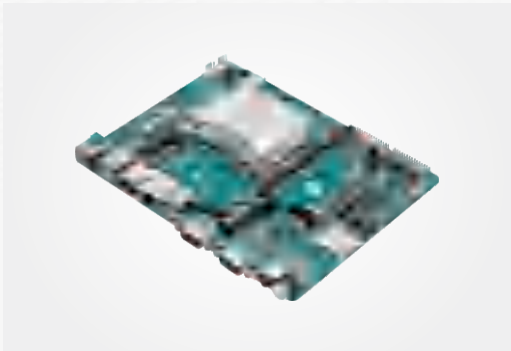

PL680_I526L

- Onboard Intel® I5-7200U 2.5GHz dual core processor,TDP 15W
- 1* SODIMM DDR4 RAM slot, 2133MHz, up to 32GB
- 1* HDMI1.4, 1* LVDS, 2* EDP (support dual EDP, or LVDS+EDP display)
- 2* LAN (RTL8111H)
- 2* DB9 RS232/RS485, 4* RS232 pin port
- 4* USB3.0, 4* USB2.0, 1* TPM2.0 port
- 1* M.2 SSD, 1* M.2 WiFi port, 1* Mini PCIE support WiFi/4G
- 148 x 102mm
- DC 12V

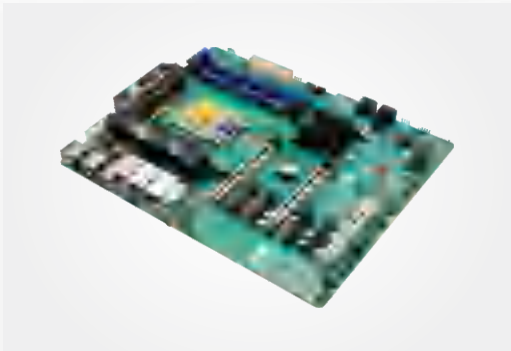

Z882FM


- Support Intel® Arrow Lake LGA 1851 Ultra2-S Processor
- Intel® Q870/W880 chipset
- 4* DDR5 DIMM RAM slots, 6400MHz, up to 256GB, support ECC memory
- 4* HDMI2.0 (4096x2160 @60Hz), 1*VGA (1920x1080@60Hz)
- 3* LAN (2* Intel® I210AT; 1* Intel® I226LM, support VPRO)
- 6* RS232 (2*RS485/RS422), 10* USB3.0, 3* USB2.0
- 2* PCIE5.0 X16 (X8 signal), 4* PCIE4.0X4, 1* PCI
- 305 x 245mm
- ATX power supply




SHENZHEN HANZSUNG TECHNOLOGY CO.,LTD

Company Profile

Shenzhen Hanzsung, brand name YENTEK®, Intel® IoT Solutions Alliance Affiliate Member and Intel® Titanium Partner, established in 2000 Shenzhen China, is a high-tech enterprise that focus on R&D, production, and sales of industrial computing products. Main products include Industrial Motherboard, Industrial Computer, Embedded Computer, Panel PC, Mini PC, Firewall Appliance, Rack Mount Computer, etc., which are widely used in AI Edge Computing, Machine Vision, Industrial Automation, Smart Medicine, Smart Transportation, Cloud Servers, Network Security, Digital Display, Self-service and various automation fields.

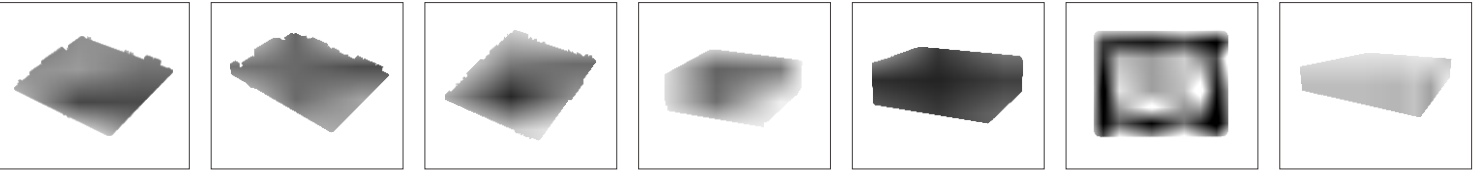

IoT AI Intelligent Hardware System Solution Provider





AS35-HV

- Rockchip® RK3568B2
- onboard LPDDR4 4GB, eMMC5.1 32GB
- 2* LAN, onboard WiFi2.4G & BT4.1
- 2* RS232/ RS485
- 5* USB3.0, 1* USB2.0
- 1* HDMI, 1*VGA
- 1* Mini PCIE WiFi/ 4G slot
- 141.4 x 126 x 45.5mm
- DC 12V



C2120Z-V

- Intel® Elkhart Lake J6412
- 2* LAN (RTL8111H)
- 4* USB3.0
- 2* RS232 / RS485
- 1* HDMI2.0, 1* VGA
- 1* Mini PCIE WiFi/ 4G slot
- 141.4 x 126 x 45.5mm
- DC 12V



C2120Z-W4

- Intel® Alder Lake N97
- 4* LAN (Intel® 210AT)
- 2* RS232/ RS485
- 5* USB3.0, 1* USB2.0
- 1* HDMI1.4
- 1* Mini PCIE WiFi/ 4G slot
- 141.4 x 126 x 44mm
- DC 12~24V



C4350Z-H2

- Intel® Celeron 5205U / J6412 / Core i5-8260U / i5-10210U
- 2* LAN (RTL8111H)
- 2 * RS232 / RS485
- 4* USB3.0, 4* USB2.0
- 1* HDMI2.0, 1* HDMI1.4
- 1* M.2 WiFi, 1* mini PCIE WiFi / 4G slot
- 141.5 x 126 x 56.5mm
- DC 12V



C6850Z-C6

- Intel® J1900 / J6412 / i5-6300U / i5-8260U / i5-10210U / i5-1135G7 / i7-1195G7
- 2* LAN (Intel® 210AT)
- 8* USB
- 6* RS232 (4* RS485, 2* CAN)
- 1* HDMI, 1* VGA
- 1* M.2 WiFi, 1* mini PCIE 4G slot, 1* PS2, 1* TPM2.0, GPIO
- 235 x 197 x 57mm
- DC 9~36V



P1071Y-M6

- 10.4" LCD, 800*600, 4:3, capacitive touch screen
- Intel® Celeron J6412 / Core i5-8260U / i5-10210U / i5-1135G7
- 2* LAN (Intel® I210AT) M12 port
- 6* RS232 (2* RS485, 1* RS422) M12 port
- 4* USB3.0, 2* USB2.0 M12 port
- 1* HDMI
- 1* M.2 WiFi, 1* M.2 5G slot
- 272 x 214 x 62mm
- DC 9~36V M12 port



P1571Y-P4

- 10.4" / 12.1" / 15" / 15.6" / 17" / 19" / 21.5" / 23.8"
- IP65 front, Capacitive touch, Fanless design
- Intel® J6412 / i5-7300U / i5-8260U / i5-10210U / i5-1135G7
- 5* LAN(4* POE)
- 2* USB 3.0, 2* USB2.0, 4* RS232 (2* RS485, 1* RS422), 1* HDMI, GPIO
- 1* M.2 WiFi, 1* M.2 5G slot
- VESA mount/ Embedded
- DC 9~36V



P1581Y-C6

- 10.1" / 12.1" / 15.6" / 21.5" / 23.8" wide screen (Aspect Ratio 16:9)
- IP65 front, Capacitive touch, Fanless design
- Intel® J6412 / i5-7300U / i5-8260U / i5-10210U / i5-1135G7
- 2* LAN, 4* USB 3.0, 2* USB2.0
- 6* RS232 (2* RS485, 1* RS422), 1* HDMI, GPIO
- 1* M.2 WiFi, 1* M.2 5G slot
- VESA mount/ Embedded
- DC 9~36V



N5150Z

- Intel® Alder Lake N100
- 1* SO DDR4 RAM, up to 16GB, 1* M.2 SSD slot
- 2* LAN (RTL8111H)
- 2* HDMI2.0
- 3* USB3.0, 2* USB2.0, 1* Type-C
- 1* Audio, 1* WiFi
- 128 x 128 x 45mm
- DC 12V



N5450Z-HD2

- AMD® R5-7535HS CPU
- 2* SODIMM DDR5 RAM slots, 4800MHz, up to 64GB
- 2* RTL8125G 2.5G LAN port
- 2* HDMI2.0, 2* DP++
- 2* USB3.0, 2* USB2.0, 1* Type-C(10Gbps)
- 151 x 151 x 47mm
- DC 19V




G3250S-C6

- Intel® i5-7300HQ / i7-7820HQ / i5-8300H / i5-12450H
- 2* LAN (Intel® 210AT)
- 1* HDMI, 1*VGA
- 6* RS232 (6* RS485, 3* RS422, 2* CAN)
- 6* USB3.0, 2*USB2.0, 1* built-in USB2.0
- 1* Mini-PCIE WiFi/4G slot, 1* M.2 5G slot
- DC 9~36V



G3750S-C6

- Support Intel® LGA1151 / LGA1700, 6~9 / 11~12th Gen CPU (TDP < 65W)
- Intel Z390 / H770 chipset
- 2* LAN (Intel® I210AT)
- 1* HDMI, 1* VGA
- 2* SODIMM DDR4 slots, up to 64GB
- 6* RS232 (6* RS485, 3* RS422, 2* CAN)
- 8* USB3.0, 2* USB2.0, built-in 1* USB2.0
- 8* DI, 8* DO, isolated
- DC 9~36V

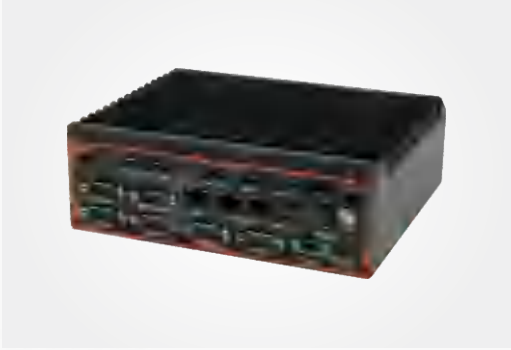

P6760S-L3

- Intel® Alder Lake N97 / N305
- 3* LAN (Intel® 210AT) (2*POE)
- 5* USB3.0, 5* USB2.0
- 6* RS232 / RS485
- 1* HDMI2.0, 1* DP
- 1* Mini-PCIE WiFi/ 4G slot
- Installation: Embedded/ Wall-mount/ DIN Rail
- 188 x 164.7 x 66mm
- DC 9~36V



G3780F-C8E2

- Chipset: H770, support Intel® LGA1700 12~14th Gen CPU
- 2* LAN (Intel® 210AT)
- 15* USB3.0, 3* USB2.0
- 8* RS232 (6* RS485 / 5* RS422/ 2* CAN)
- 1* HDMI, 1* VGA
- 1* mini PCIE WiFi, 1* M.2 WiFi, 1* M.2 5G slot
- 1* PCIe3.0 x16 (x8 signal), 1* PCIe3.0 x8 (x8 signal)
- 229 x 209 x 125.7mm
- DC 9~36V



G3780F-L6E2

- Chipset: H770, support Intel® LGA1700 12~14th Gen CPU
- 6* LAN (Intel® 210AT) (4* POE)
- 8* USB3.0, 3* USB2.0
- 4* RS232 (2* RS485, 1* RS422)
- 1* HDMI, 1* VGA
- 1* M.2 WiFi, 1* M.2 5G slot
- 1* PCIe3.0 x16 (x8 signal), 1* PCIe3.0 x8 (x8 signal)
- 229 x 209 x 125.7mm
- DC 9~36V