

GO 600 MAXIMUM THROUGHPUT. MINIMUM LABOR.



STOP PAYING FOR SLOW. START WRAPPING AT 125 RPM.

- **ELIMINATE BOTTLENECKS:** Replace slow manual wrapping with high-speed 125 RPM consistency.
- **REDUCE LABOR FATIGUE:** Switch from back-breaking manual work to effortless pedal-controlled operation.
- **INSTANT ROI:** Engineered for high margins and a payback period of less than 3 months.
- **GLOBAL READY:** 100% Plug-and-Play for US (110V) and EU (230V) markets.



TECHNICAL DETAILS

Net Passing Diameter (mm) / (inch)	600/23.62
Standart Dimensions (WxLxH)	(1150x820x1430) / (45.30 x32.30x 56.30)
Max. Rotational Velocity (rpm)	5 to 125 rpm
Total Weight (kg)	220
Installed Power (kw)	0.375 kw

STRETCH FILM

Max. Exterior Diameter (mm/in)	200mm / 7.88 in
Reel Core Diameter (mm/in)	76 / 3 (Opt. 38 / 1.5)
Film width (mm /in)	(100 and 125mm) (3.94 and 4.92)
Recommended Thickness (microns)	15,17,20,23,30

WHY UPGRADE?

GLOBAL READY: PLUG AND PLAY FOR EU & US

GLOBAL READY: 110V (US/Canada) & 230V (EU).

Arrives assembled. Start wrapping in 5 minutes. 



MANUELLES WICKELN VON HAND	DYNARAP GO 600
CONSISTENCY: (VARIABLE /POOR)	PERFECT EVERY TIME
SPEED: SLOW & INCONSISTENT	UP TO 125 RPM
FILM WASTE: HIGH (USER ERROR)	OPTIMIZED TENSION CONTROL




More Space
600mm
diameter

Robust
Chassis
220kg

Easy
Worldwide
Shipment

Plug-and-Go
Installation

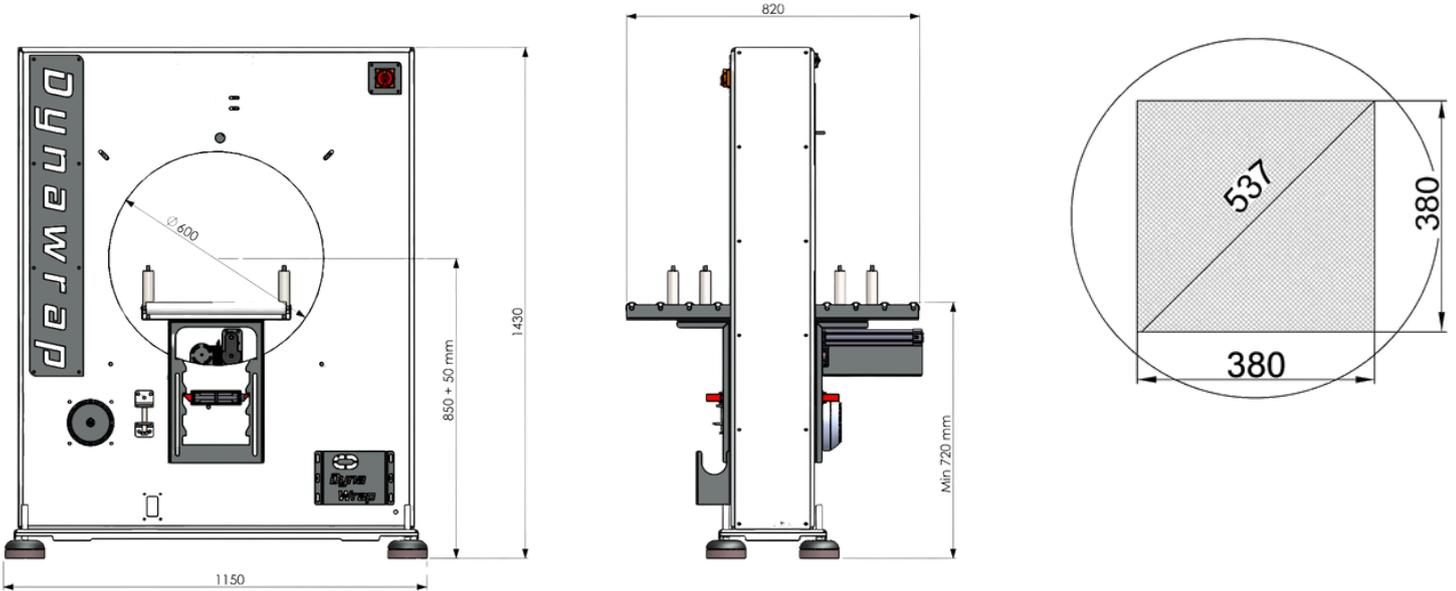

CUSTOMIZE WORKFLOW



ADDITIONAL CONVEYORS

- Perfect for long profiles, bundles
- Seamless integration flow
- Configurably for future growth



AUTOMATIC CUTTING SYSTEM

- Increases operators productivity
- ZERO Maintenance need
- Configurably for future growth



REQUEST AN ROI CALCULATION & QUOTE IN 24 HOURS



FACTORY:

KATAY MAKINE MUH. OTOMOTIV SAN. TIC. LTD
75.YIL OSB MAH. 2008. CAD NO: 12 ESKISEHIR/TURKIYE



EUROPE SERVICE AND SPARE PARTS CENTER:

DYNAPWRAP EUROPE KFT
RÉVAY KÖZ 4 1065, BUDAPEST HUNGARY



dynawrap@katay.com.tr