



ONLEVEL

SKYFORCE
JULIET BALCONY
NEW: **ONLINE CONFIGURATOR**



Different finishes

Quick and simple mounting

Available for different glass thicknesses, pre-assembled as a set

SKYFORCE

JULIET BALCONY

6	GLASS DIMENSIONS
7	STANDARD COLOURS
8	SKY FORCE SLIM
12	SKY FORCE SIDE
14	SKY FORCE TOP
16	SKY FORCE T
18	SKY FORCE SOUND SHIELD
20	INSTALLATION EXAMPLES
34	EDGE PROTECTION
35	TOOLS

SKYFORCE

Juliet Balcony system

With simple tools and just a few steps, you can easily and perfectly conceal the fall protection system behind the roller shutter guide rail. Naturally, SKY**FORCE** is compatible with every window profile. Thanks to the unique and purpose-designed slide-clip technology, it can be mounted directly onto the window frame or the masonry. And the best part is: with just one profile, all glass thicknesses, heights, and widths are covered.

The design?

Can you already picture it? Clean lines, elegant shapes – a system that not only protects but also inspires. SKY**FORCE** combines safety with style. Take a deep breath and enjoy the moment: feel the sense of freedom, openness, and space – along with the confidence that you can rely on maximum stability. SKY**FORCE** stands firm when it matters most – strong, reliable, and flawlessly beautiful. A protection system that doesn't limit your home, but expands it.

SKY**FORCE** – Safety in its most beautiful form.

Colour reimagined

No matter how far worlds may be apart – colours connect. With our new range, you can turn your visions into reality: available in all RAL colours, individually and infinitely combinable. Give your project personality – from classic to modern, from subtle to expressive – the choice is yours.

SKY**FORCE** – Where safety meets colour dive

Tested systems

We from ON**LEVEL** strive to test your individual window/profile system. The huge variety of profile systems and frame designs throughout Europe, however, makes this task very hard for us. That's why on your profile system, we have listed the profile criteria for a SKY**FORCE** installation according to the General Building Inspection Test Certificate for you.

If you take these criteria into account, an additional inspection will not be required – always provided that the window has also been installed as per fall protection requirements using our tested fixing anchors.

For an overview of the up-to-date tests, please see the supplementary sheet or get in touch with us per e-mail: info@onlevel.com.

Essential Features

- | Easy ordering thanks to packaging sets of 500, 700, 900, 1000, 1100, and 1200 mm.
- | ON**LEVEL** prefabricated system Installation advantage of up to 30 minutes per set.
- | Storage lengths of 5000 mm available.
- | The only system with a drainage option as a protection against mould and breakage.
- | Nearly tool-free installation.
- | Colour design possible according to RAL/NCS.
- | Suitable for plastic, aluminium, wooden and metal frames.
- | General Building Inspection Test Certificate (AbP).
- | Depending on the on-site situation, the glass can be installed either from the inside or the outside.



Essais réalisés selon le Cahier
3034 - NF P 01-013 - DTU 39



TESTED
according to
BS6180

SIA 261



SKY**FORCE** is a registered trade mark from ON**LEVEL**.



WEBSITE
ONLEVEL.COM



GLASS DIMENSIONS

Glass width up to	Glass thickness	Glass height
1200 mm	10,76 mm	800 - 1200 mm
1400 mm	12,76 mm	500 - 1200 mm
1700 mm	17,52 mm	500 - 1200 mm
3000 mm	21,52 mm	300 - 1200 mm

Please always consider the static requirements.



STANDARD COLOURS

Surface finish code for your SKYFORCE order



.10 Aluminium mill finish



.11 Aluminium anodised

Your preferred colour?


We will of course deliver your desired RAL or NCS colour. ONLEVEL charges a set-up surcharge for RAL colours for quantities < 5 pieces per article, per order, per delivery.



.13 RAL glossy



.16 RAL structured matt

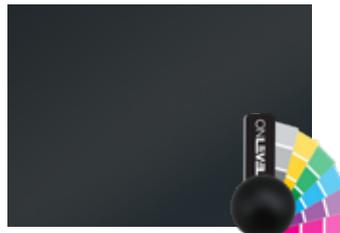

.18 RAL matt

ONLEVEL

Juliet Balcony (Glass)




DIRECT ORDERING OF THE DESIRED RAL COLOUR POSSIBLE



AUTOMATIC CALCULATION OF GLASS DIMENSIONS AND FIXING DISTANCES



AUTOMATIC SELECTION OF SUITABLE INSTALLATION MATERIAL ON REQUEST





CONFIGURE IT OUT!

THE SKYFORCE CONFIGURATOR FROM ONLEVEL

WWW.ONLEVEL-SHOP.COM

SKYFORCE SLIM INSTALLATION, 2-SIDED COVER


2-SIDED COVER PROFILE
16.9532.005.xx

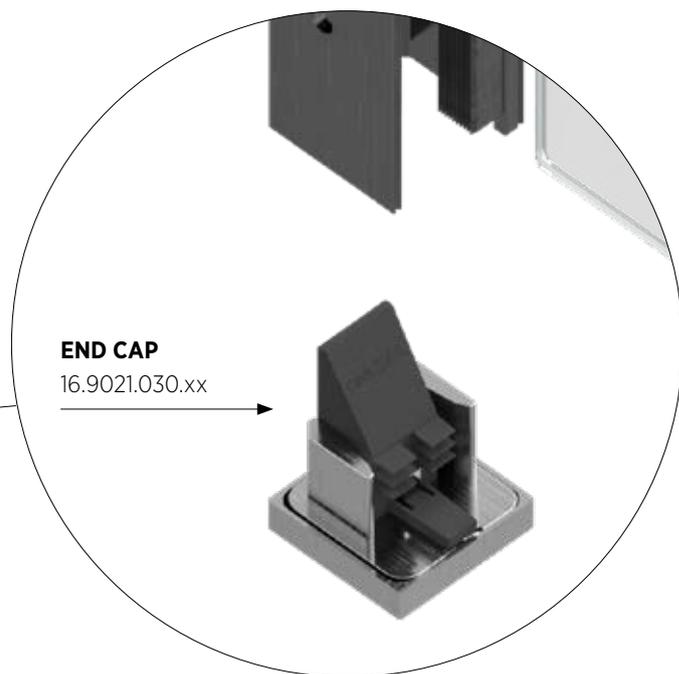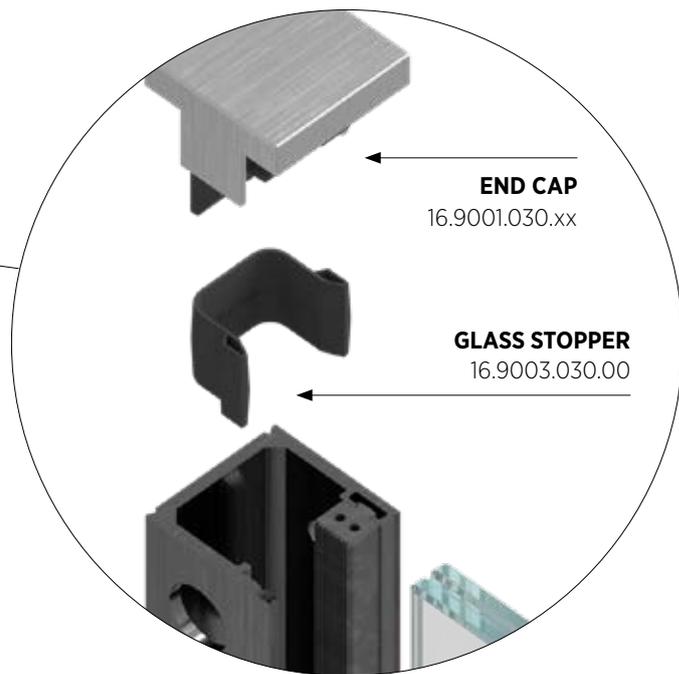


SKYFORCE SLIM INSTALLATION, 2-SIDED COVER

Mounting distances for different lengths

Installation from the outside (façade side)

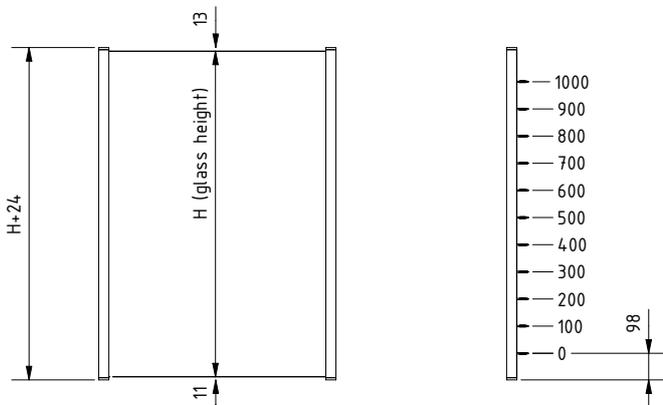


Installation from the inside (room side)

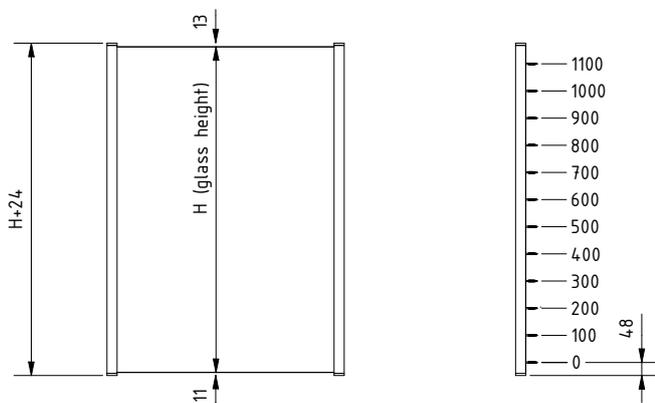


Glass dimensions

Glass installation from the outside (façade side)

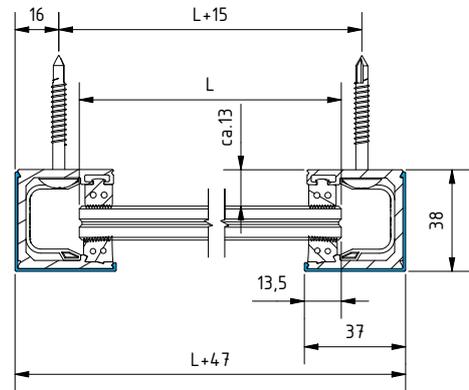

Glass installation from the inside (room side)

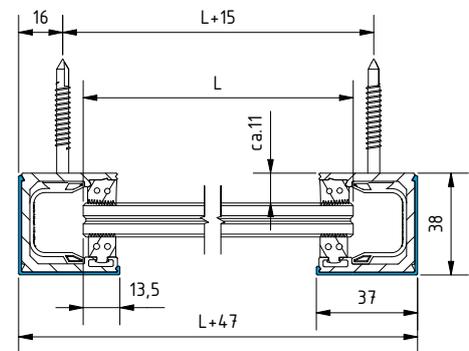

i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

Juliet balcony, 2-part complete set, 2-sided



- | SKYFORCE SLIM now with a reduced width from 37 mm, which makes SLIM especially suitable for narrow window frames
- | Glass mounting can optionally be done either from outside or from inside.
- | Heights of 500, 700, 900, 1000, 1100 and 1200 mm available in stock.
- | For edge protection, see page 34.
- | Screws not included. For suitable fixing options, see the installation examples from page 20.

Glass height (H)	500 mm	700 mm	900 mm	1000 mm	1100 mm	1200 mm
Rubber set for	Art. no.					
10,76 - 12,76 mm	16.3005.011.xx	16.3007.011.xx	16.3009.011.xx	16.3010.011.xx	16.3011.011.xx	16.3012.011.xx
17,52 - 21,52 mm	16.3005.018.xx	16.3007.018.xx	16.3009.018.xx	16.3010.018.xx	16.3011.018.xx	16.3012.018.xx




Quick & easy

For further helpful information, please see our ONLEVEL website. Here you will find explanatory and installation videos, photos and downloads, as well as a configurator to help you with the glass calculations.

SKYFORCE SLIM INSTALLATION, 1-SIDED COVER


1-SIDED COVER PROFILE
(Only available in 5 m)
16.9533.005.xx

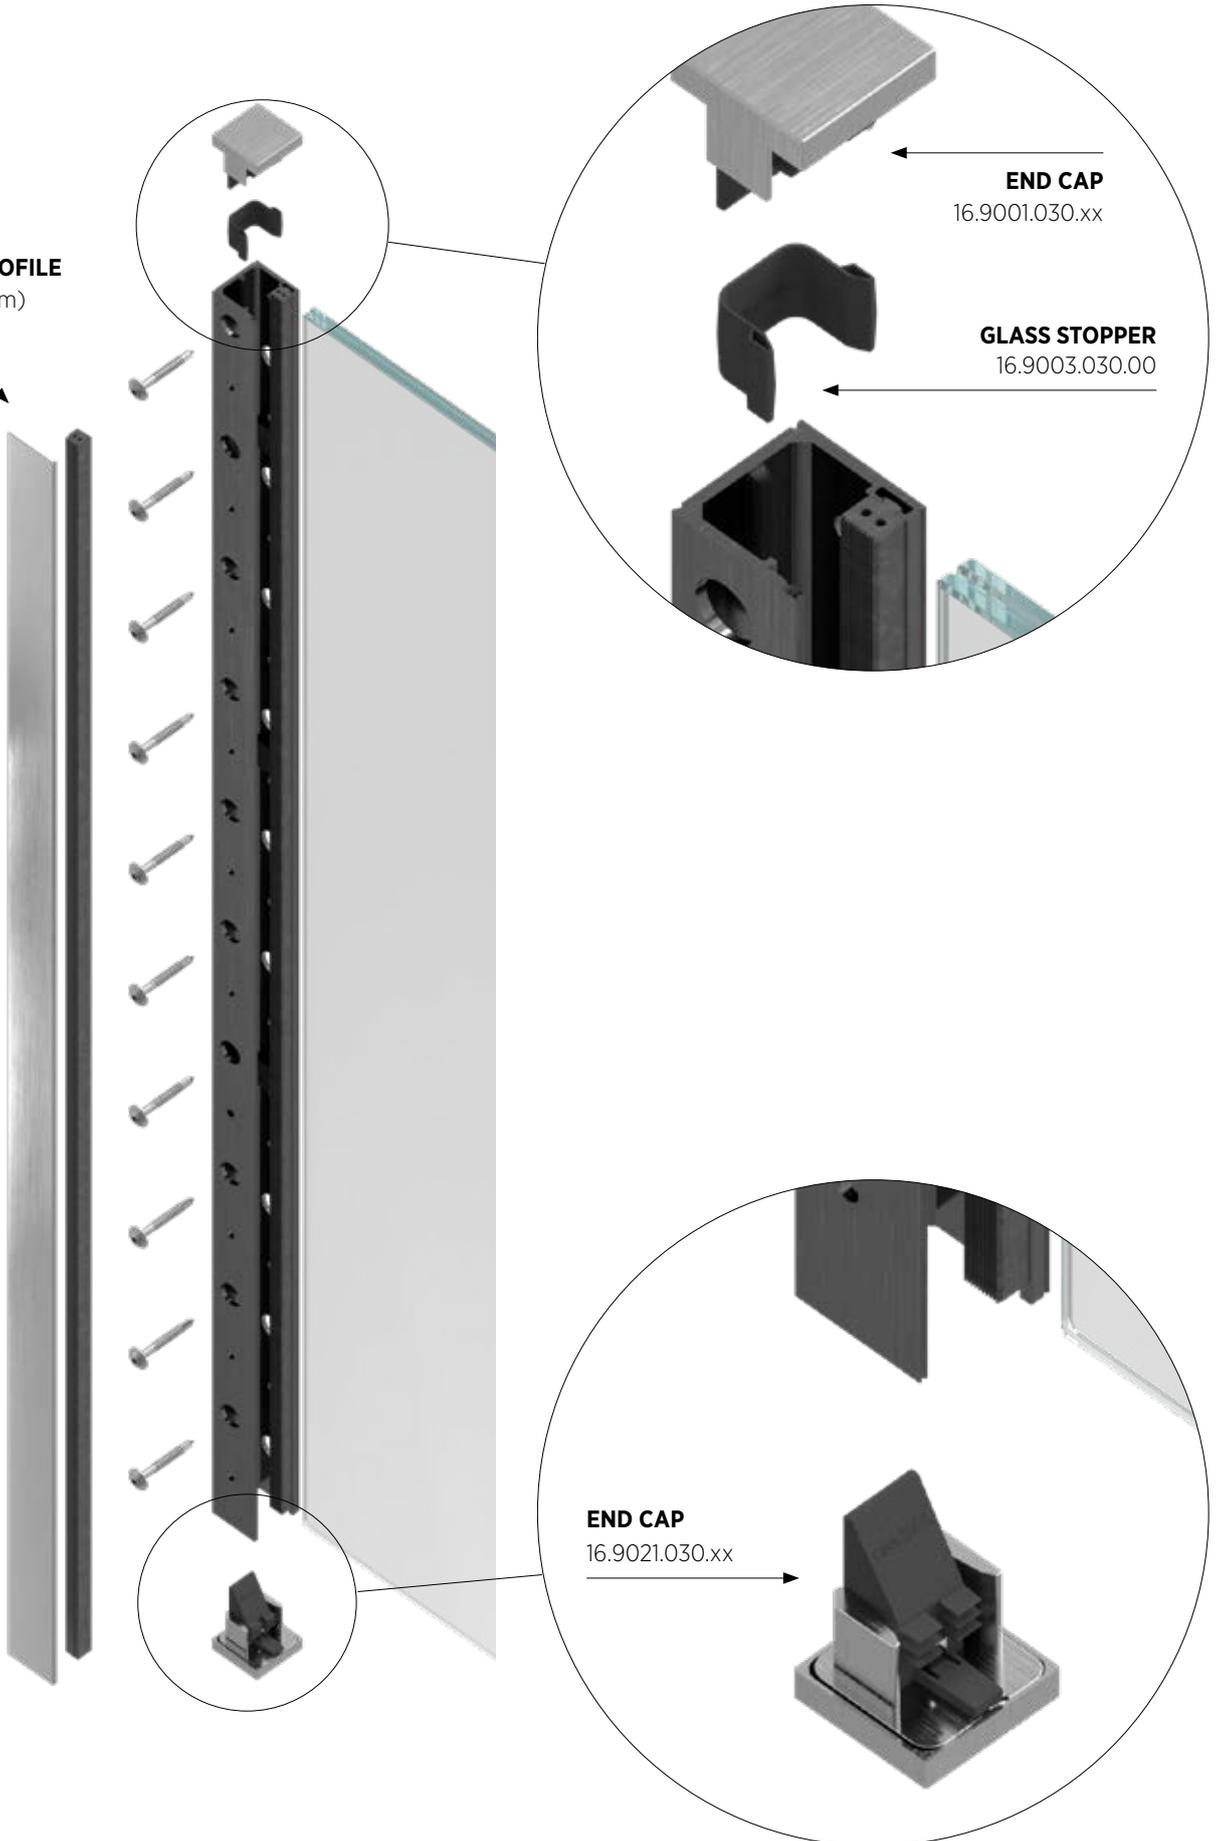


SKYFORCE SLIM INSTALLATION, 1-SIDED COVER

Mounting distances for different lengths

Installation from the outside (façade side)

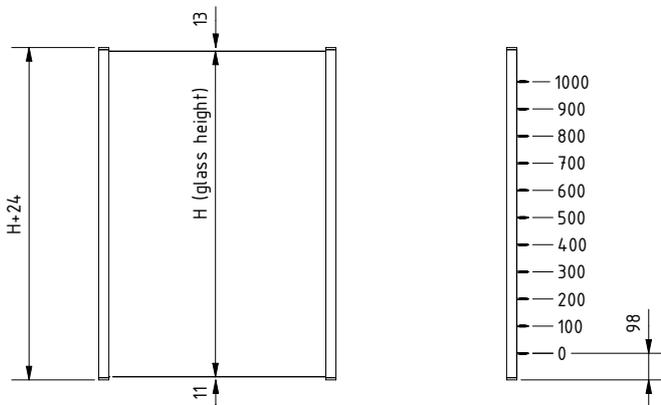


Installation from the inside (room side)

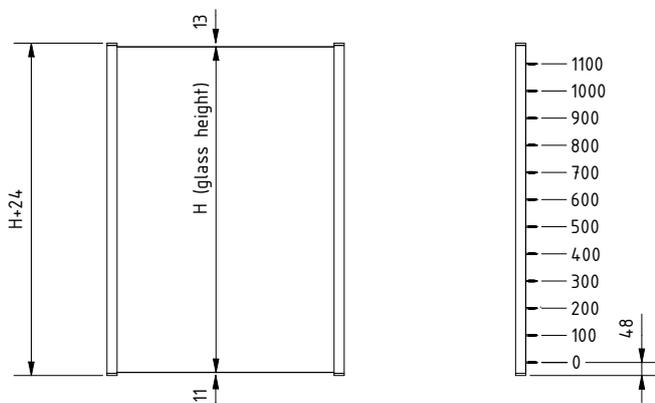


Glass dimensions

Glass installation from the outside (façade side)

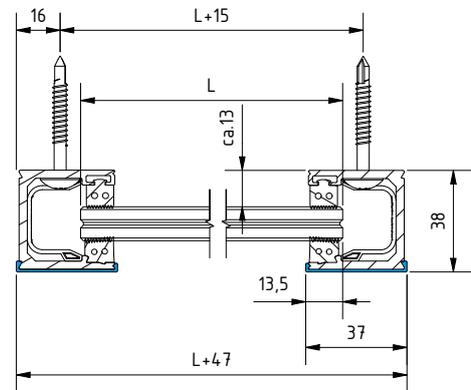

Glass installation from the inside (room side)

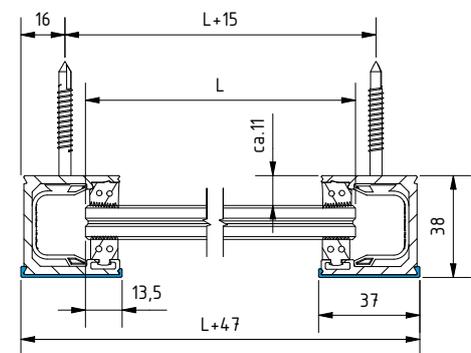

i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

Juliet balcony, 2-part complete set, 1-sided



- | SKYFORCE SLIM now with a reduced width from 37 mm, which makes SLIM especially suitable for narrow window frames.
- | Glass mounting can optionally be done either from outside or from inside.
- | Heights of 500, 700, 900, 1000, 1100 and 1200 mm available in stock.
- | For edge protection, see page 34.
- | Screws not included. For suitable fixing options, see the installation examples from page 20.

Glass height (H)	500 mm	700 mm	900 mm	1000 mm	1100 mm	1200 mm
Rubber set for	Art. no.					
10,76 - 12,76 mm	16.3105.011.xx	16.3107.011.xx	16.3109.011.xx	16.3110.011.xx	16.3111.011.xx	16.3112.011.xx
17,52 - 21,52 mm	16.3105.018.xx	16.3107.018.xx	16.3109.018.xx	16.3110.018.xx	16.3111.018.xx	16.3112.018.xx




Quick & easy

For further helpful information, please see our ONLEVEL website. Here you will find explanatory and installation videos, photos and downloads, as well as a configurator to help you with the glass calculations.


SKYFORCE SIDE INSTALLATION

**GLASS SEALING STRIP,
FALL SIDE**
16.92xx.250.60

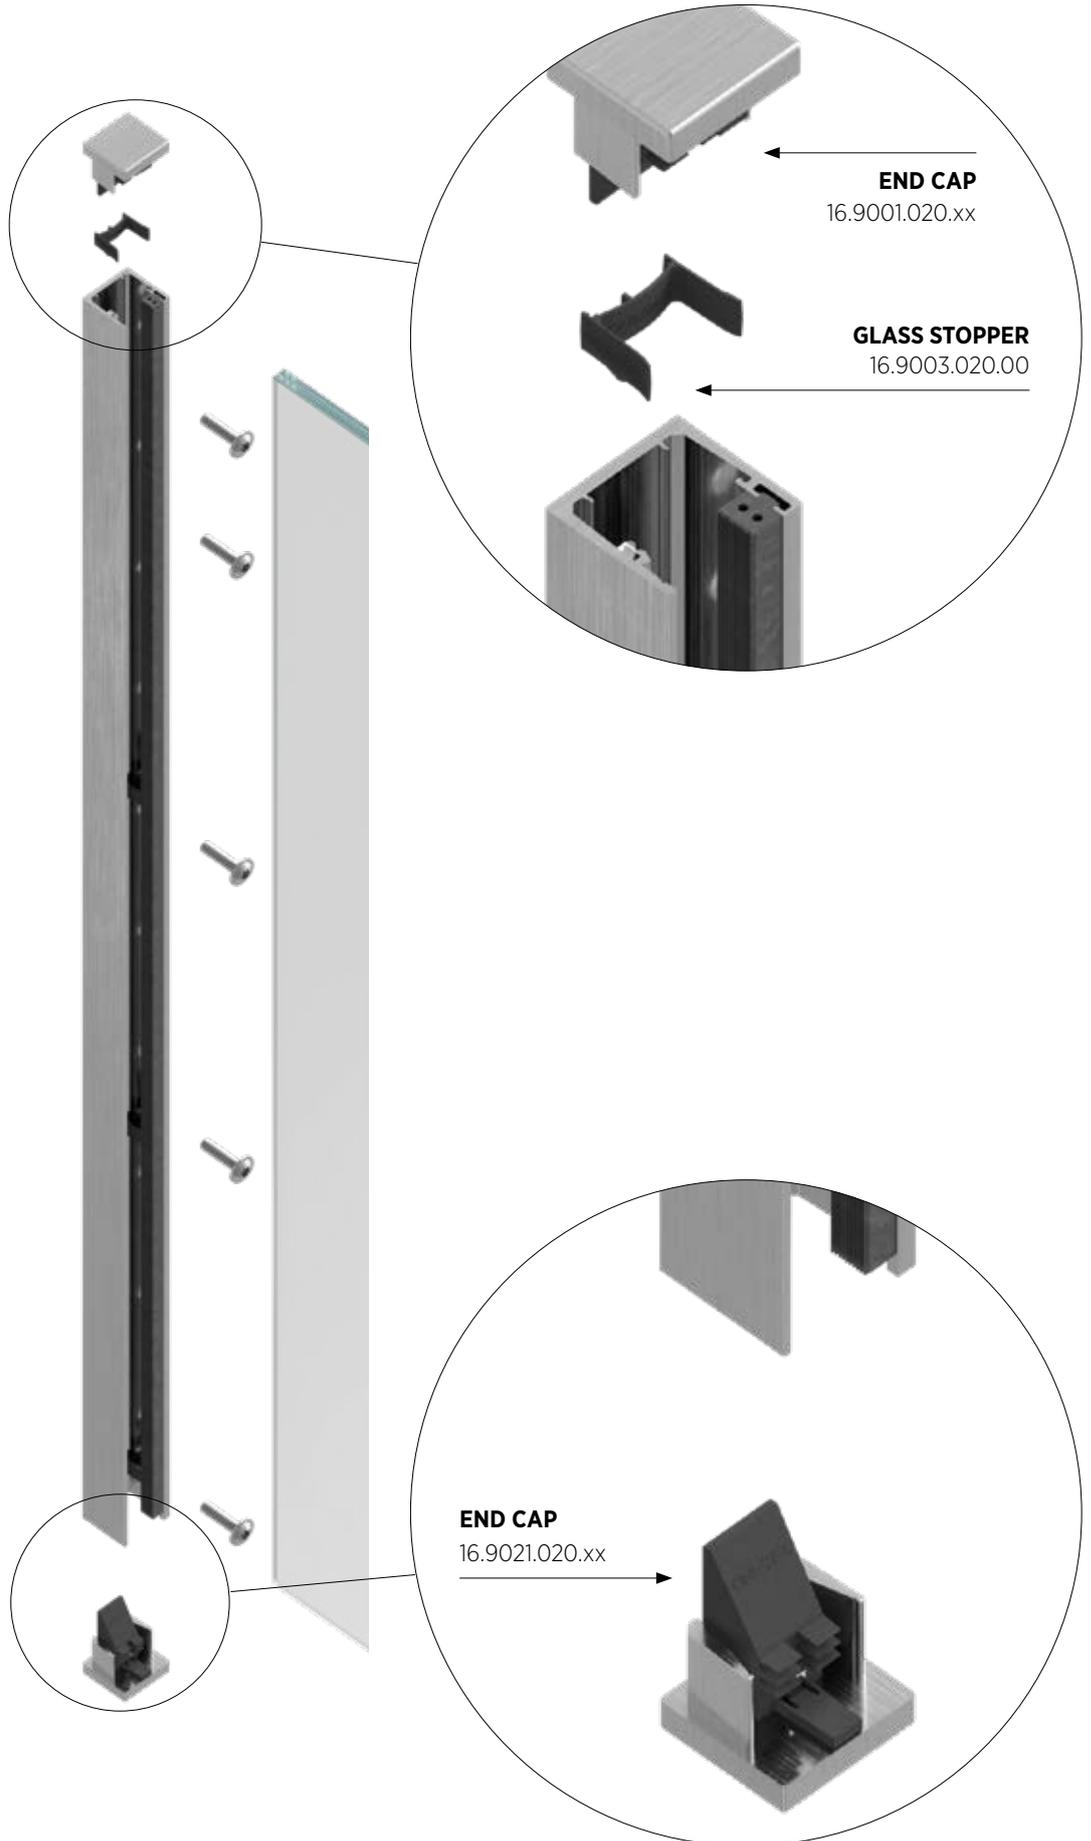


SKYFORCE SIDE INSTALLATION

Mounting distances for different lengths

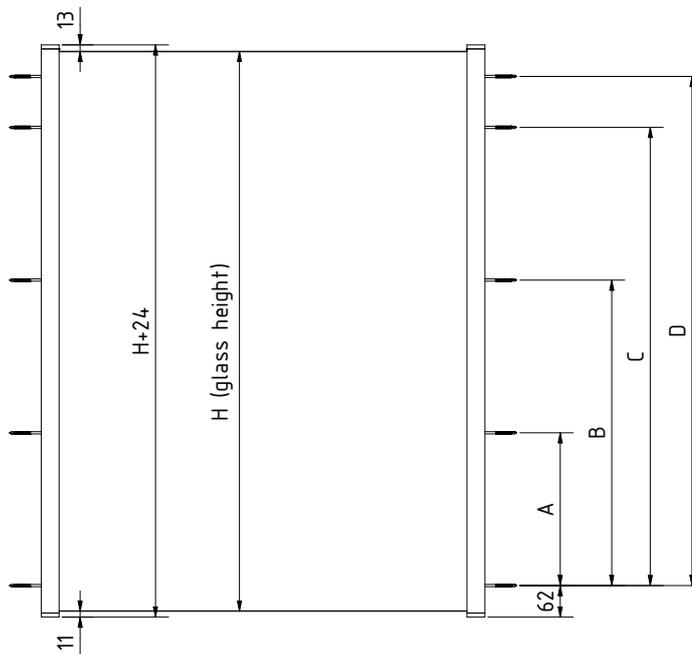

Glass dimensions

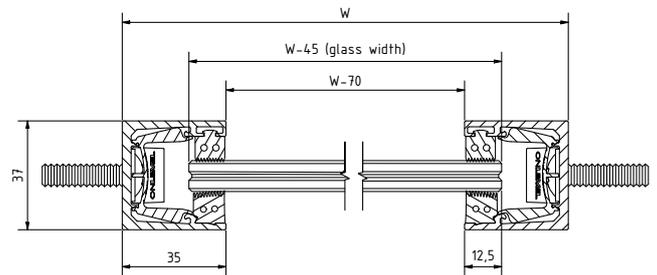

Glass height (H)	500	700	900	1000	1100	1200
A	100	100	200	200	300	300
B	200	300	400	500	600	600
C	300	500	700	800	900	1000
D	400	600	800	900	1000	1100

Dimensions in mm

Fixing screw for aluminum and steel frames, side mount




| Finish exterior application: V4A (exterior)
| Sales unit: 10 pieces

Model 9006

AISI 316 (exterior)

Art. no.

91.1190.812.30



Juliet balcony, 2-part complete set



| For edge protection, see page 34.

| Screws not included. For suitable fixing options, see the installation examples from page 20.

Glass height (H)	500 mm	700 mm	900 mm	1000 mm	1100 mm	1200 mm
Rubber set for	Art. no.					
10,76 - 12,76 mm	16.2005.011.xx	16.2007.011.xx	16.2009.011.xx	16.2010.011.xx	16.2011.011.xx	16.2012.011.xx
17,52 - 21,52 mm	16.2005.018.xx	16.2007.018.xx	16.2009.018.xx	16.2010.018.xx	16.2011.018.xx	16.2012.018.xx




Quick & easy

For further helpful information, please see our **ONLEVEL** website. Here you will find explanatory and installation videos, photos and downloads, as well as a configurator to help you with the glass calculations.

SKYFORCE TOP INSTALLATION


**GLASS SEALING STRIP,
FALL SIDE**
16.920x.250.60

COVER PROFILE
16.9511.005.xx

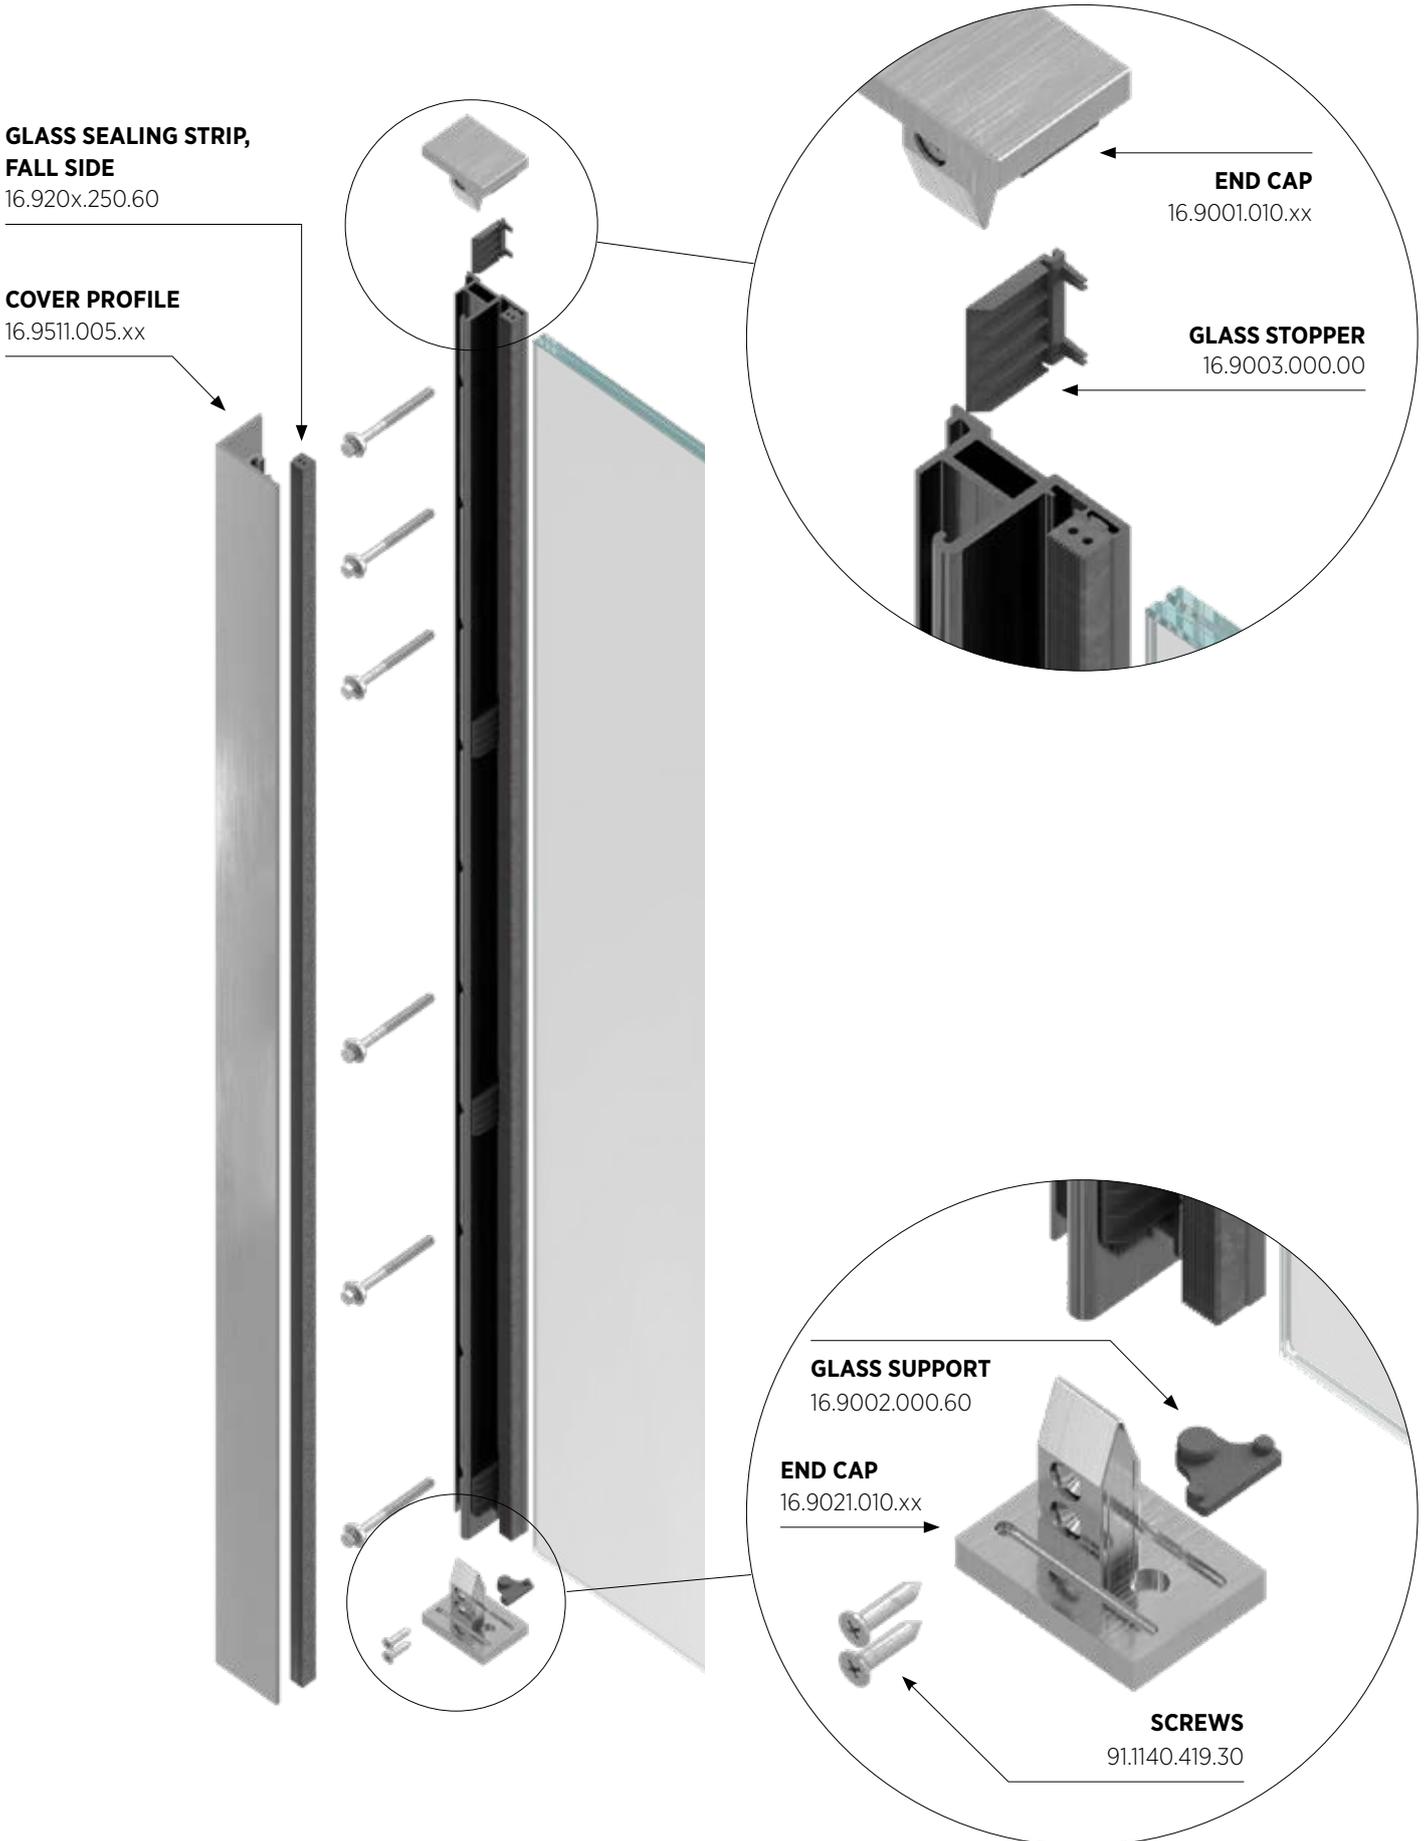

SKYFORCE TOP INSTALLATION


Mounting distances for different lengths

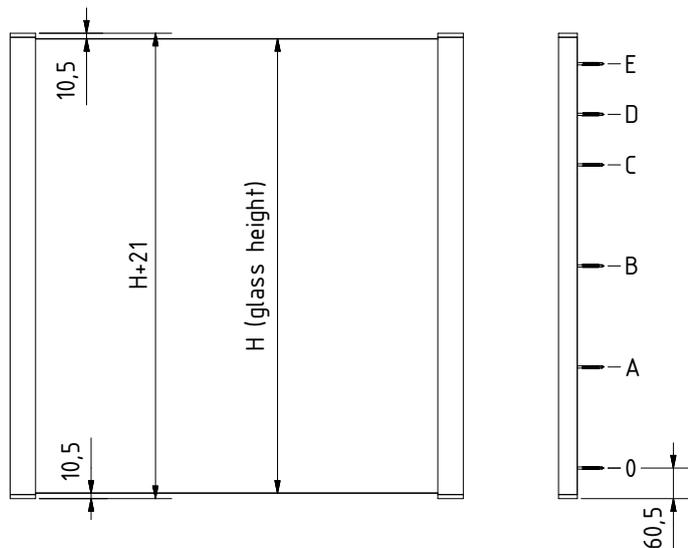


Glass height (H)	500	700	900	1000	1100	1200
A	100	200	200	200	200	300
B	200	400	400	400	500	600
C	300	500	600	700	800	900
D	400	600	700	800	900	1000
E	-	-	800	900	1000	1100

Dimensions in mm

Glass dimensions complete set

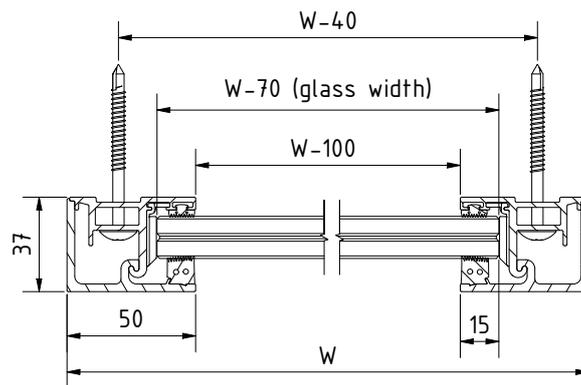

Glass dimensions centrepiece

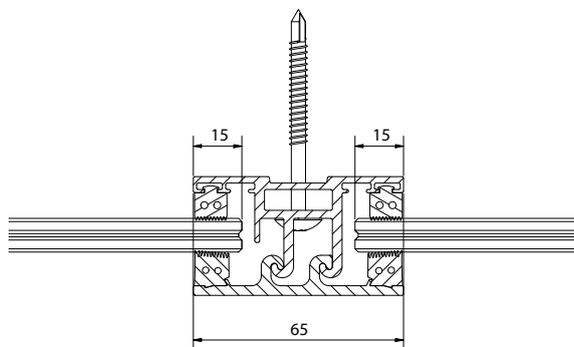

Juliet balcony, 2-part complete set


- | For edge protection, see page 34.
- | Screws not included. For suitable fixing options, see the installation examples from page 20.



Glass height (H)	500 mm	700 mm	900 mm	1000 mm	1100 mm	1200 mm
Rubber set for	Art. no.					
10,76 - 12,76 mm	16.1005.011.xx	16.1007.011.xx	16.1009.011.xx	16.1010.011.xx	16.1011.011.xx	16.1012.011.xx
17,52 - 21,52 mm	16.1005.018.xx	16.1007.018.xx	16.1009.018.xx	16.1010.018.xx	16.1011.018.xx	16.1012.018.xx

Juliet balcony, centrepiece, top mount

- | For edge protection, see page 34.
- | Screws not included. For suitable fixing options, see the installation examples from page 20.

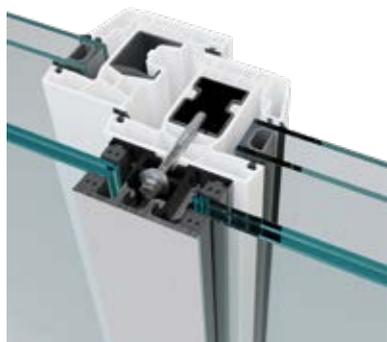


Glass height (H)	500 mm	700 mm	900 mm	1000 mm	1100 mm	1200 mm
Rubber set for	Art. no.					
10,76 - 12,76 mm	16.1505.011.xx	16.1507.011.xx	16.1509.011.xx	16.1510.011.xx	16.1511.011.xx	16.1512.011.xx
17,52 - 21,52 mm	16.1505.018.xx	16.1507.018.xx	16.1509.018.xx	16.1510.018.xx	16.1511.018.xx	16.1512.018.xx

SKYFORCE TOP in the LogiKal software




SKYFORCE T INSTALLATION | SKYFORCE SIDE

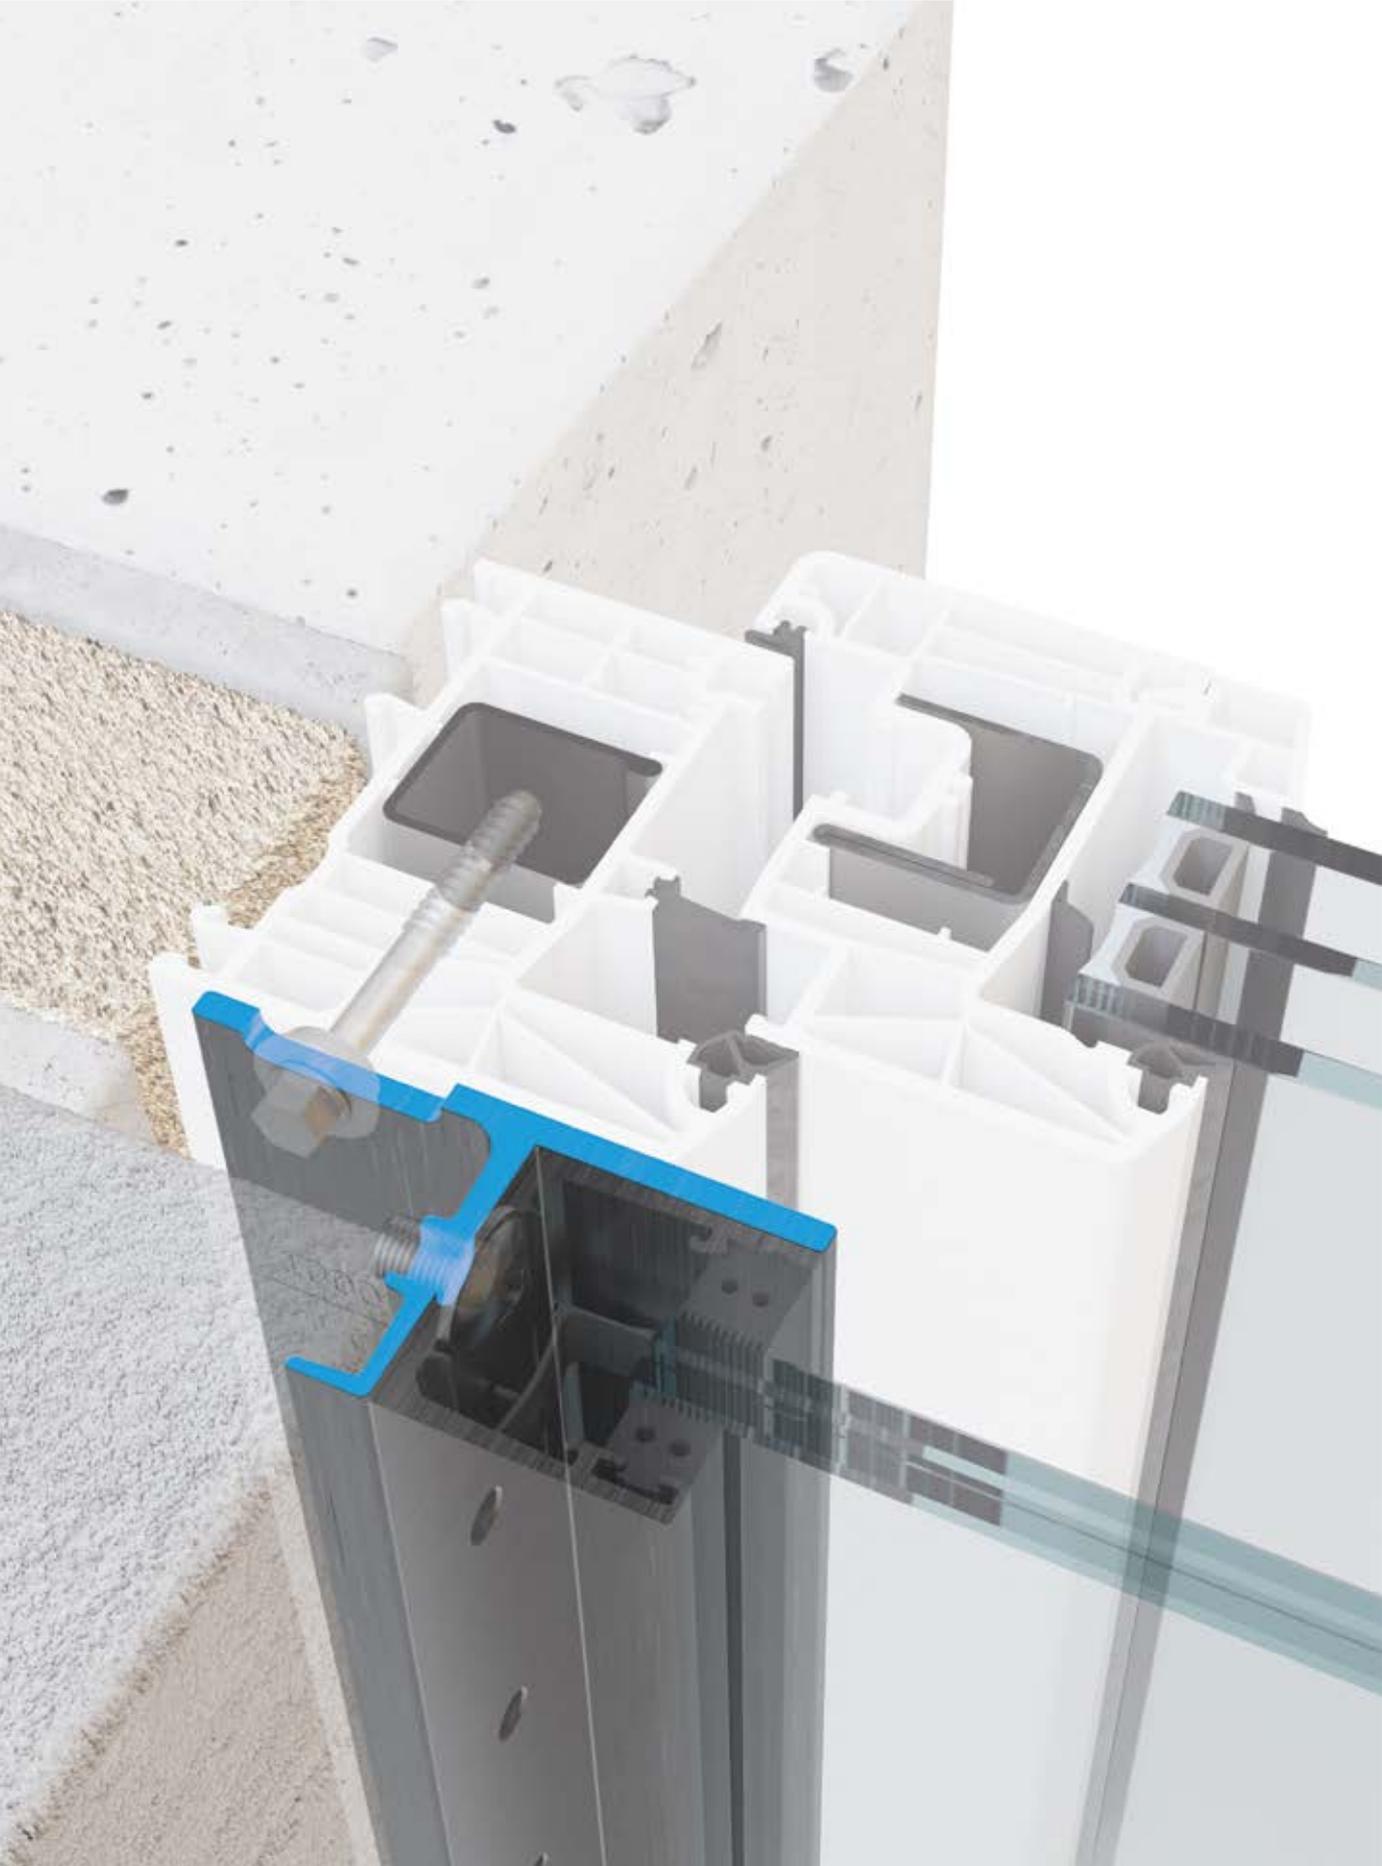


SKYFORCE T INSTALLATION | SKYFORCE SIDE

Mounting distances for different lengths

For the distance between the screw fixings of SKYFORCE SIDE into the T profile, see page 13 (SKYFORCE SIDE). The length of the T profiles must be trimmed to the height of the SKYFORCE sets (max. 1100 mm).

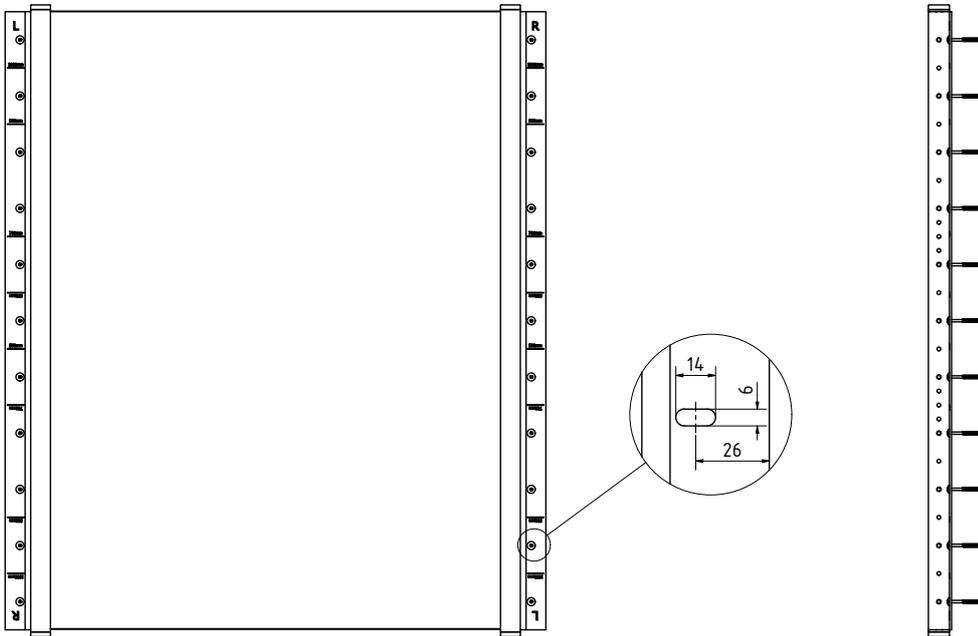

Glass dimensions

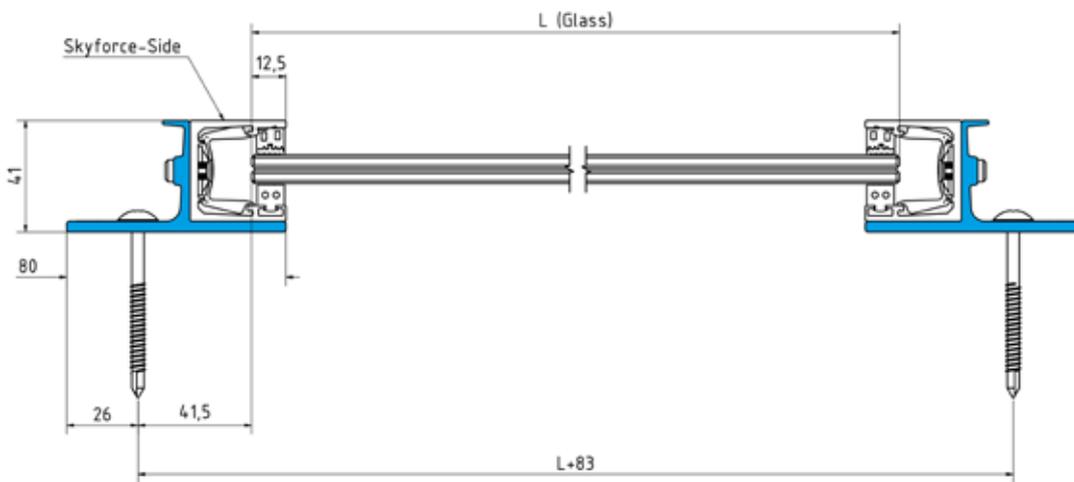

Juliet balcony - T post



- | To be used together with SKYFORCE SIDE
- | Fixing screws for attaching SKYFORCE to the T posts are included in delivery.
- | Fixing screws for installation to the window not included.
- | For suitable fixing options, see the installation examples from page 20.

Model 9050	Mill finish	Plain aluminium	RAL
Length	Art. no.	Art. no.	Art. no.
1100 mm	16.9050.011.10	16.9050.011.11	10.9050.011.13/16/18

SKYFORCE SOUND SHIELD | READY-MADE SETS



Juliet balcony 2-piece complete set, sound insulation

Sound insulation redefined: Sound Shield by ONLEVEL

With SOUND SHIELD, ONLEVEL offers an effective solution for enhanced sound insulation. The system is easily installed in front of the window and immediately creates a noticeable sense of quiet.

Your benefits at a glance:

- | Precisely engineered solutions developed based on the Hamburg Noise Guidelines
- | Custom designs for specific sound insulation requirements
- | Versatile applications in various installation situations
- | Compatible with roller shutter and venetian blind systems for maximum flexibility


SOUND SHIELD - reliable sound insulation of the highest quality.

Glass dimensions

Maximum glass dimensions available on request. Email: sales@onlevel.com

SOUND SHIELD – SKYFORCE SIDE


Installation

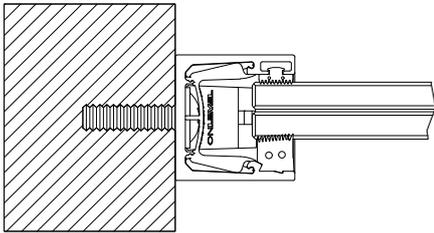

Model 2030	Mill finish	Plain aluminium	RAL
Max. glass height / thickness	Art. no.	Art. no.	Art. no.
3000 mm / 10,76 - 21,52 mm	16.2030.000.10	16.2030.000.11	16.2030.000.13/16/18

SOUND SHIELD – SKYFORCE SLIM

Installation

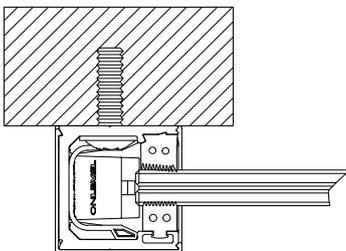

Model 2030	Mill finish	Plain aluminium	RAL
Max. glass height / thickness	Art. no.	Art. no.	Art. no.
3000 mm / 10,76 - 21,52 mm	16.3030.000.10	16.3030.000.11	16.3030.000.13/16/18

Surface code

.10 Aluminium mill finish
.11 Aluminium anodised

.13 RAL glossy
.16 RAL matt textured
.18 RAL matt

ONLEVEL charges a set-up surcharge for RAL colours for quantities < 5 pieces per article, per order, per delivery.



**SKYFORCE
CONFIGURATOR**

SKYFORCE


INSTALLATION EXAMPLES

- 22** INSTALLATION ONTO THE COVER FRAME - **PLASTIC**
- 24** INSTALLATION ONTO THE COVER FRAME - **ALUMINIUM**
- 26** INSTALLATION ONTO THE COVER FRAME - **WOOD**
- 28** INSTALLATION ONTO THE COVER FRAME - **WOOD-ALUMINIUM**
- 30** SHUTTER GUIDE PROFILE
- 31** INSTALLATION ONTO THE COVER FRAME - **OVERLAPPING**
- 32** INSTALLATION ONTO CONCRETE
- 33** INSTALLATION ONTO SOLID STONE




INSTALLATION ONTO THE COVER FRAME - **PLASTIC**

SKYFORCE TOP

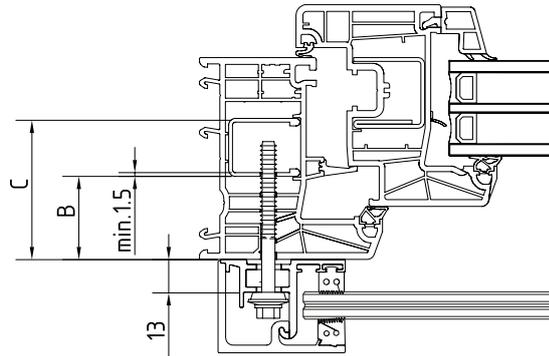


SKYFORCE SLIM

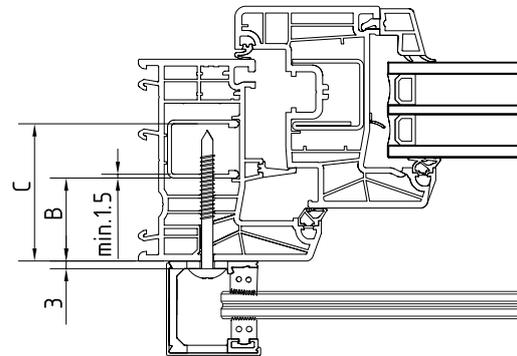

i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

SKYFORCE T

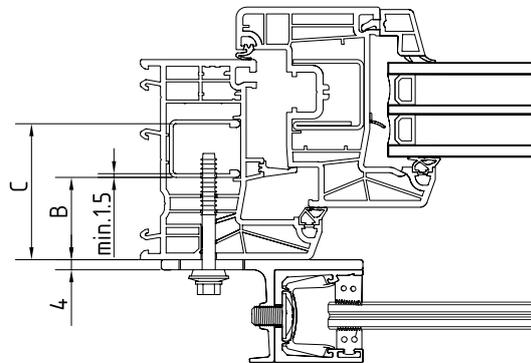

FIXATION - PLASTIC

Self-tapping fixing screw



- | Plastic frame: The screw needs a 1.5 mm steel core in the frame profile.
- | Material: steel, zinc-plated
- | The number of fixings can be taken from the test report.


Model 9005			Steel, zinc-plated	
Length	B	C (min.)	Art. no. - sales unit 12	Art. no. - sales unit 100
45 mm	0 - 14 mm	35 mm	16.9005.604.81	16.9015.604.81
55 mm	15 - 24 mm	45 mm	16.9005.605.81	16.9015.605.81
65 mm	25 - 34 mm	55 mm	16.9005.606.81	16.9015.606.81
75 mm	35 - 44 mm	65 mm	16.9005.607.81	16.9015.607.81
85 mm	45 - 54 mm	75 mm	16.9005.608.81	16.9015.608.81
95 mm	55 - 64 mm	85 mm	16.9005.609.81	16.9015.609.81
105 mm	65 - 74 mm	95 mm	16.9005.610.81	16.9015.610.81



Fixing screw



- | The anchors are not self-tapping and must be pre-drilled (16.9011.05x.00).
- | Finish exterior application: AISI 304
- | Ø 6,3 mm
- | Sales unit: 12 pieces

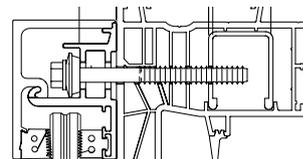

Model 9012			AISI 304		
Length	B	Art. no.	Length	B	Art. no.
50 mm	0 - 25 mm	16.9012.605.20	92 mm	55 - 65 mm	16.9012.609.20
64 mm	25 - 40 mm	16.9012.606.20	102 mm	65 - 75 mm	16.9012.610.20
75 mm	40 - 50 mm	16.9012.607.20	115 mm	75 - 90 mm	16.9012.611.20
82 mm	50 - 55 mm	16.9012.608.20			



Drill



- For pre-drilling holes for mounting stainless steel screw 16.9012.6xx.20
- | Ø 5 mm (for 1,5 mm wall thickness)
- | Ø 5.3 mm (for 2,0 - 4,0 mm wall thickness)
- | Sales unit: 1 piece

Model 9011	
Ø	Art. no.
5,0 mm	16.9011.050.00
5,3 mm	16.9011.053.00

Self-tapping fixing screw





- | Plastic frame: The screw needs a 1.5 mm steel core in the frame profile.
- | Material: AISI 304
- | Ø 5,5 mm

Model 9031/32		AISI 304	
Length	B	Art. no. - VE 12	
32 mm	0 - 12 mm	16.9032.632.20	
50 mm	0 - 30 mm	16.9032.650.20	




INSTALLATION ONTO THE COVER FRAME - ALUMINIUM

SKYFORCE TOP

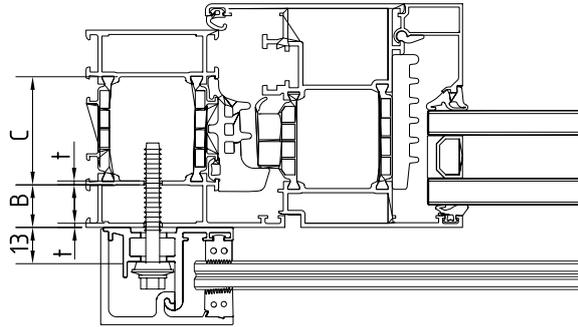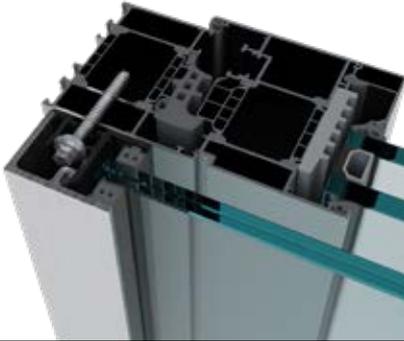

SKYFORCE SLIM

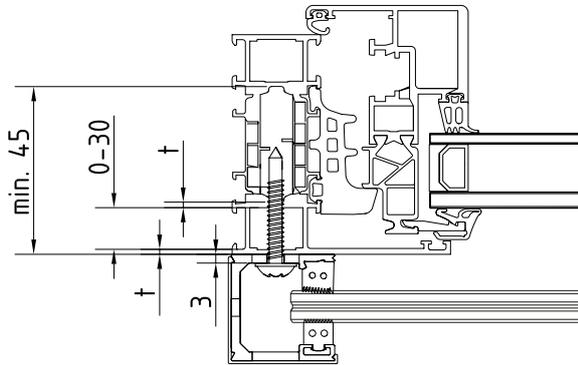

i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

FIXATION - ALUMINIUM

Self-tapping fixing screw




- | Aluminium frame: The screw needs two walls with "t" total $\geq 3,2$ mm
- | Aluminium frame: screw length max. 45 mm
- | Material: steel, zinc-plated
- | The number of fixings can be taken from the test report.

Model 9005			Steel, zinc-plated	
Length	B	C (min.)	Art. no. - sales unit 12	Art. no. - sales unit 100
45 mm	0 - 14 mm	35 mm	16.9005.604.81	16.9015.604.81

Fixing anchor



- | Surface finish exterior application: AISI 316 (exterior)
- | Sales unit: 12 pieces



Model 9006	AISI 316 (exterior)
	Art. no.
	16.9006.835.30

Self-tapping fixing screw




- | Aluminium frame: the screw needs two walls with "t" total ≥ 3.2 mm
- | Material: AISI 304
- | $\varnothing 5,5$ mm


Model 9031/32		Steel, zinc-plated
Length	B	Art. no. - sales unit 12
32 mm	0 - 12 mm	16.9032.632.20
50 mm	0 - 30 mm	16.9032.650.20

INSTALLATION ONTO THE COVER FRAME - **WOOD**

SKYFORCE TOP

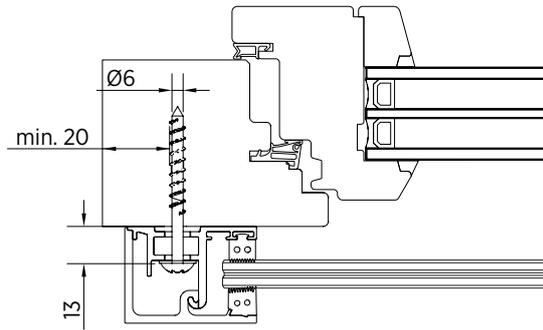


SKYFORCE SLIM

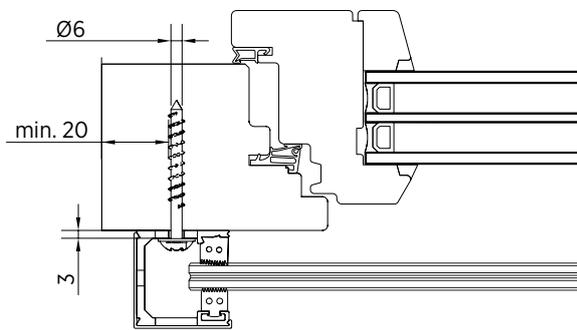


i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

Central post - SKYFORCE

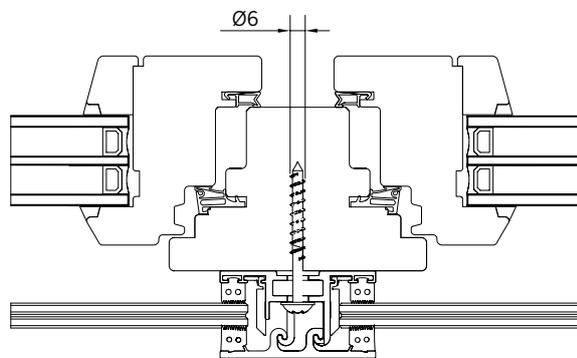


SKYFORCE T

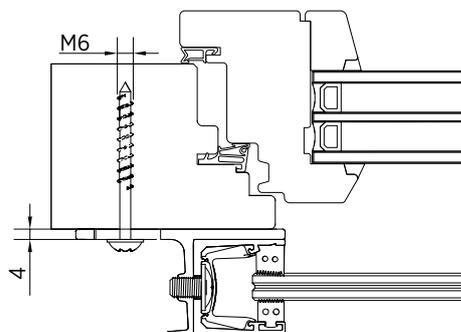

FIXATION - WOOD


Shutter guide rail

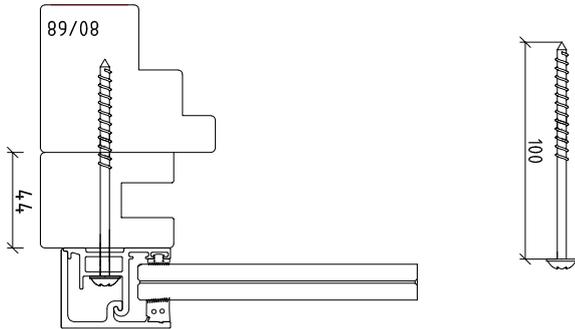

Fixing screw




| Finish exterior application: AISI 316 (exterior)
| Ø 5,5 mm
| Sales unit: 12 pieces

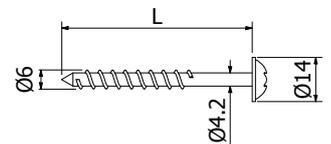


Model 9007	AISI 316 (exterior)
Length	Art. no.
60 mm	16.9007.660.30
80 mm	16.9007.680.30
100 mm	16.9007.699.30

INSTALLATION ONTO THE COVER FRAME - **WOOD-ALUMINIUM**

SKYFORCE TOP


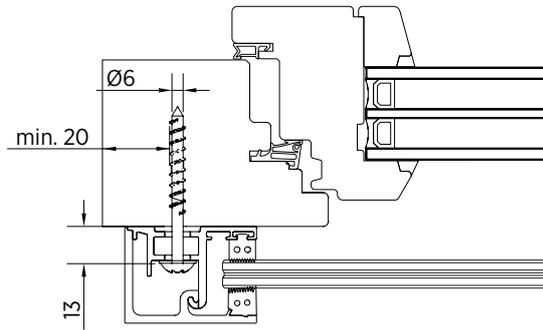


SKYFORCE SLIM

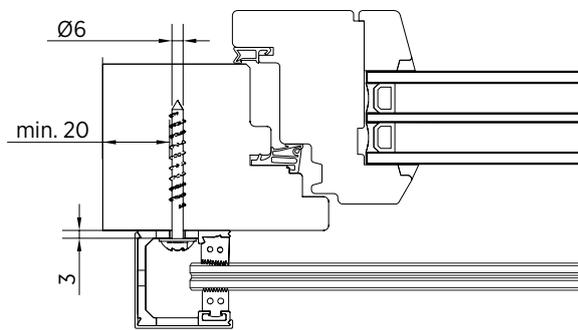


i Please keep a distance of at least 5 mm to the wall to clip on the cover after mounting.

Central post - SKYFORCE

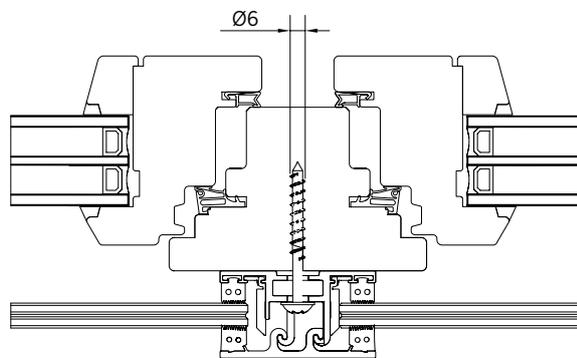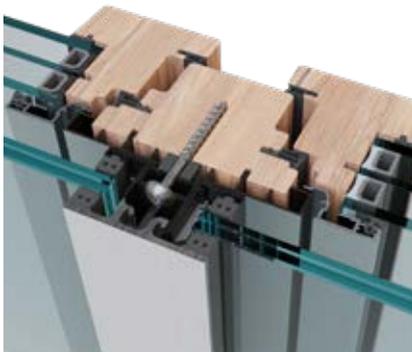

SKYFORCE T

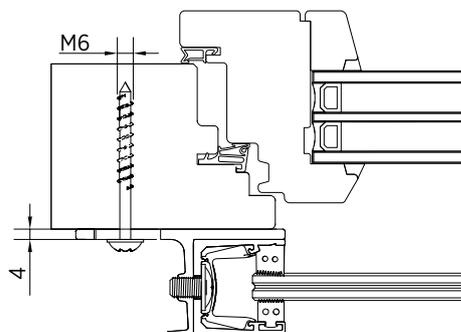


FIXATION - WOOD-ALUMINIUM

Fixing screw - SKYFORCE SLIM, TOP and SIDE




- | Finish exterior application: AISI 316 (exterior)
- | Ø 5,5 mm
- | Sales unit: 12 pieces

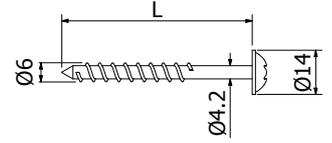

Model 9007	AISI 316 (exterior)
Length	Art. no.
60 mm	16.9007.660.30
80 mm	16.9007.680.30
100 mm	16.9007.699.30

SHUTTER GUIDE PROFILE

Shutter guide profile - SKYFORCE TOP

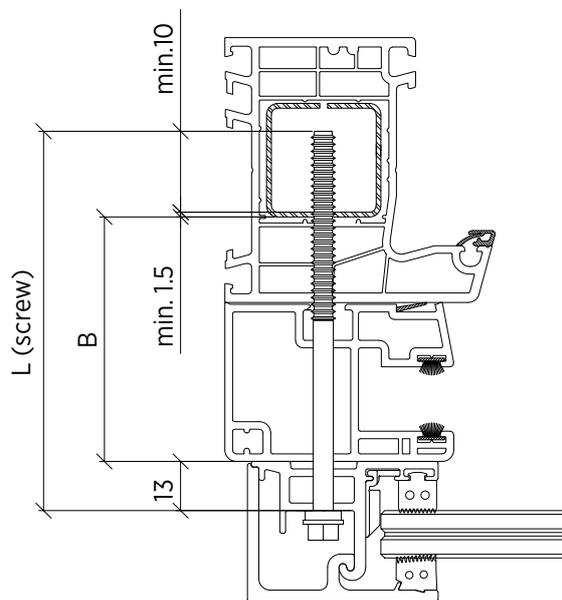


Lmin. (screw) = B + 25 mm



As an option, installation with a distance sleeve is also possible. For distance sleeve, see page 35.


INSTALLATION ONTO THE COVER FRAME - **OVERLAPPING**

Shutter guide profile - **SKYFORCE SLIM**

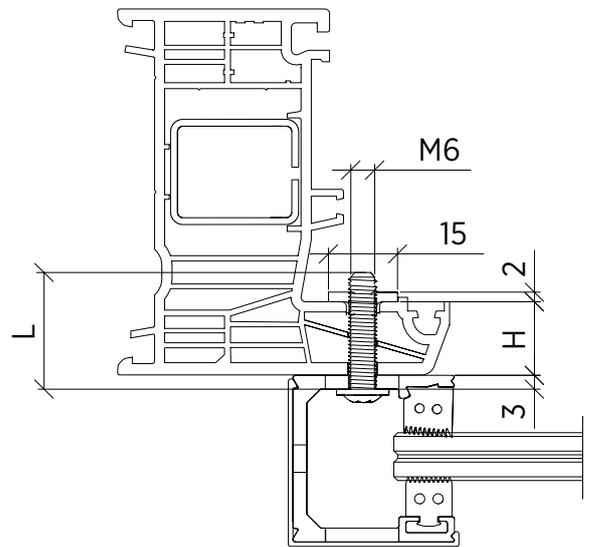

Lmin. (screw) = H (frame) + 5mm

Mounting strips

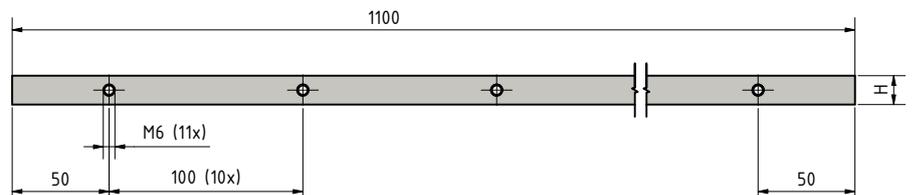

| The mounting strip must be adapted to the height of **SKYFORCE**.

| Material: AISI 304

| Sales unit: 2 mounting strips + 22 screws

| Suitable drilling template for mounting strips: 90.0100.240.20

| Matching screws to mounting strips:

- M6x10 mm: 91.1190.610.20-22
- M6x20 mm: 91.1190.620.20-22
- M6x25 mm: 91.1190.625.20-22
- M6x30 mm: 91.1190.630.20-22
- M6x35 mm: 91.1190.635.20-22

Screws must be ordered separately. The length depends on the width: "H".



Model 9036	AISI 304
Width x length	Art. no.
15 x 1100 mm	16.9036.011.20


Fill profile set



| H = 1100 mm

| Material: Plastic white

| fitting to article no. 16.9036.011.20



Model 9037	Plastic
	Art. no.
	16.9037.011.42

INSTALLATION ONTO CONCRETE

SKYFORCE SIDE




Fixing anchor FH II 12/M8 I A4

fischer 



| Finish exterior application: AISI 316 (exterior)
| Sales unit: 10 pieces



Model 9029	AISI 316 (exterior)
	Art. no.
	16.9029.835.30

INSTALLATION ONTO SOLID STONE

SKYFORCE SIDE




Fixing anchor FH II 12/M8 I A4

fischer 



| Finish exterior application: AISI 316 (exterior)
| Sales unit: 10 pieces




Model 9020	AISI 316 (exterior)
	Art. no.
	16.9020.835.30

EDGE PROTECTION

Edge protection, self-adhesive, AISI 316 brushed



| Height: 6 mm
| Thickness: 1 mm
| Sales unit: 1 piece




Model 2111		1000 mm	1500 mm	2000 mm	3000 mm	4000 mm
Width	For glass thicknesses	Art. no.				
14	10,76 - 11,52 mm	12.2111.141.31	12.2110.141.31	12.2112.141.31	12.2113.141.31	12.2114.141.31
16	12,76 - 13,52 mm	12.2111.161.31	12.2110.161.31	12.2112.161.31	12.2113.161.31	12.2114.161.31
20	16,76 - 17,52 mm	12.2111.201.31	12.2110.201.31	12.2112.201.31	12.2113.201.31	12.2114.201.31
24	20,76 - 21,52 mm	12.2111.241.31	12.2110.241.31	12.2112.241.31	12.2113.241.31	12.2114.241.31

Edge protection, self-adhesive, aluminium mill finish




| Height: 7 mm
| Thickness: 1 mm
| Sales unit: 1 piece
| The adhesive tape is supplied separately.




Model 2111		1000 mm	1500 mm	2000 mm	3000 mm	4000 mm
Width	For glass thicknesses	Art. no.				
14	10,76 - 11,52 mm	11.2111.141.10	11.2110.141.10	11.2112.141.10	11.2113.141.10	11.2114.141.10
16	12,76 - 13,52 mm	11.2111.161.10	11.2110.161.10	11.2112.161.10	11.2113.161.10	11.2114.161.10
20	16,76 - 17,52 mm	11.2111.201.10	11.2110.201.10	11.2112.201.10	11.2113.201.10	11.2114.201.10
24	20,76 - 21,52 mm	11.2111.241.10	11.2110.241.10	11.2112.241.10	11.2113.241.10	11.2114.241.10

Edge protection, self-adhesive, aluminium plain anodised

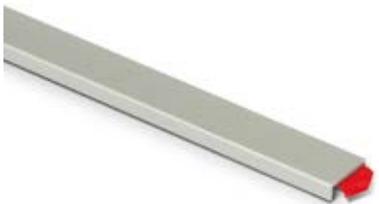

| Height: 7 mm
| Thickness: 1 mm
| Sales unit: 1 piece




Model 2111		1000 mm	1500 mm	2000 mm	3000 mm	4000 mm
Width	For glass thicknesses	Art. no.				
14	10,76 - 11,52 mm	11.2111.141.11	11.2110.141.11	11.2112.141.11	11.2113.141.11	11.2114.141.11
16	12,76 - 13,52 mm	11.2111.161.11	11.2110.161.11	11.2112.161.11	11.2113.161.11	11.2114.161.11
20	16,76 - 17,52 mm	11.2111.201.11	11.2110.201.11	11.2112.201.11	11.2113.201.11	11.2114.201.11
24	20,76 - 21,52 mm	11.2111.241.11	11.2110.241.11	11.2112.241.11	11.2113.241.11	11.2114.241.11
28	25 - 25,52 mm	11.2111.281.11	11.2110.281.11	11.2112.281.11	11.2113.281.11	11.2114.281.11

Edge protection, self-adhesive, aluminium RAL



| Height: 7 mm
| Thickness: 1 mm
| Sales unit: 1 piece, minimum order quantity 5 units




Model 2111		1000 mm	1500 mm	2000 mm	3000 mm	4000 mm
Width	For glass thicknesses	Art. no.				
14	10,76 - 11,52 mm	11.2111.141.xx	11.2110.141.xx	11.2112.141.xx	11.2113.141.xx	11.2114.141.xx
16	12,76 - 13,52 mm	11.2111.161.xx	11.2110.161.xx	11.2112.161.xx	11.2113.161.xx	11.2114.161.xx
20	16,76 - 17,52 mm	11.2111.201.xx	11.2110.201.xx	11.2112.201.xx	11.2113.201.xx	11.2114.201.xx
24	20,76 - 21,52 mm	11.2111.241.xx	11.2110.241.xx	11.2112.241.xx	11.2113.241.xx	11.2114.241.xx

TOOLS

Distance sleeve for fixing anchor



- | Suitable for use with the shutter guide rail and wooden and aluminium frames (can be trimmed to size on site)
- | Ø 16 mm
- | Aluminium
- | Sales unit: 10 pieces



Model 9320	Black anodised	RAL
Length	B	Art. no.
10,5 mm	16.9320.010.15	16.9320.010.13/16/18
16 mm	16.9320.016.15	16.9320.016.13/16/18
20,5 mm	16.9320.020.15	16.9320.020.13/16/18
65 mm	16.9320.065.15	16.9320.065.13/16/18

SKYFORCE mounting tool



- | Mounting aid for rubber seal
- | Sales unit: 1 piece

Model 0100	
	Art. no.
	90.0100.105.00

ONLEVEL

ONLEVEL Ltd. | Unit 7, Alexandria Court | Alexandria Drive
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom
T +44 0161 804 9500 | info@onlevel-uk.com | www.onlevel-uk.com