

Tranquil-C



CONDENSATE PUMP


- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Reset function
- Built-in operation tracking
- Installed in trunking elbow
- Up to 16 kw/54,600 Btu/h
- Max. flow 18 L/h (4.8GPH)
- Sound level < 17-19 dB(A) @ 1M (3.3ft)
- Max. discharge head 12M (39.4ft)

The Tranquil-C uses a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. A built-in counter tracks operating time and provides alarm notifications for optimal maintenance.

> TECHNICAL DATA

- Power supply: 100-240V AC 50/60Hz <4W
- Max. flow: 18 L/H (4.8GPH), range from 12-18L/H (3.2-4.8GPH)
- Sound level: 17-19dB(A)@1M (3.3ft)
- Max. discharge head: 12M (39.4ft)
- Max. suction lift: 2M (6.6ft)
- Max. unit output: 16kw / 54,600 Btu/h
- Safety switch: 3A Normally closed
- Max. water temperature: 40 °C
- Discharge tube: 6mmID
- Class: II appliance
- Protection: Fully potted, IP-45
- LxWxH: 82.6mm x 47.8mm x 96.9mm
- 2 year warranty

TYPICAL PERFORMANCE <

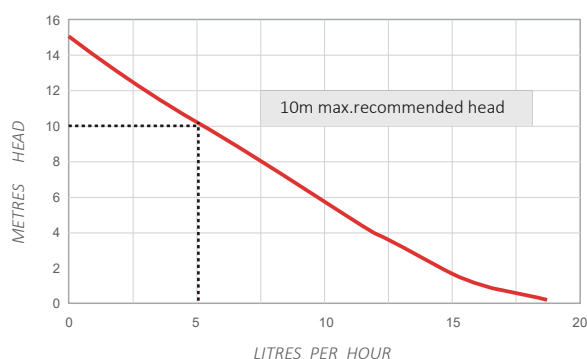

> IN THE BOX

- 1 Assembled Tranquil-C
- 2 breather hole 6mm od
- 3 Assembled Inline reservoir
- 4 1.5m length of 6mm i/d vinyl tube
- 5 Inlet tube
- 6 Power Cable
- 7 Anti-siphon valve
- 8 4 x 200mm x 4mm cable ties
- 9 Check valve
- 10 1 A fuse
- 11 Line Set (As option)

