


- ① DD11 UNE-EN 10.111-98
ZINCADO / ZINC COATED / ZINGUÉ BLANC / VERZINKT Zn8 UNE-EN 2081:2010
- ② DD11 UNE-EN 10.111-98
ZINCADO / ZINC COATED / ZINGUÉ BLANC / VERZINKT Zn8 UNE-EN 2081:2010
- ③ F211 S/UNE 36.021-80
ZINCADO / ZINC COATED / ZINGUÉ BLANC / VERZINKT Zn8 UNE-EN 2081:2010
- ④ MEZCLAS: NR, CAUCHO ANTIOZONO DE ALTA CALIDAD s/UNE 53535
MATERIAL ELASTOMER PART: NR, OZON RESISTANT, HIGH QUALITY s/UNE 53535
MÉLANGES: NR, CAOUTCHOUC ANTIOZONE DE HAUTE QUALITÉ s/UNE 53535
ELASTOMER-WERKSTOFF: NR, OZONRESISTENT, HÖCHSTE QUALITÄT s/UNE 53535
- ⑤ TOLERANCIAS SEGÚN NORMA ISO 3302 / TOLERANCES ACCORDING TO ISO 3302
TOLERANCES SELON ISO 3302 / TOLERANZEN NACH ISO 3302

Dureza, Hardness, Dureté, Härte	Carga, Load, Charge, Last	Flecha, Deflection, Flèche, Federweg	Mezcla, Elastomer, Mélange, Elastomer
35 Sh	200 Kg	7 (+/- 1.0) mm	M4AA310A13B13C12
45 Sh	340 Kg	7 (+/- 1.0) mm	M4AA414A13B13C12
60 Sh	420 Kg	7 (+/- 1.0) mm	M4AA614A13B13C12
65 Sh	425 Kg	5 (+/- 1.0) mm	M4AA614A13B13C12
75 Sh	800 Kg	5 (+/- 1.0) mm	M4AA714A13B13C12

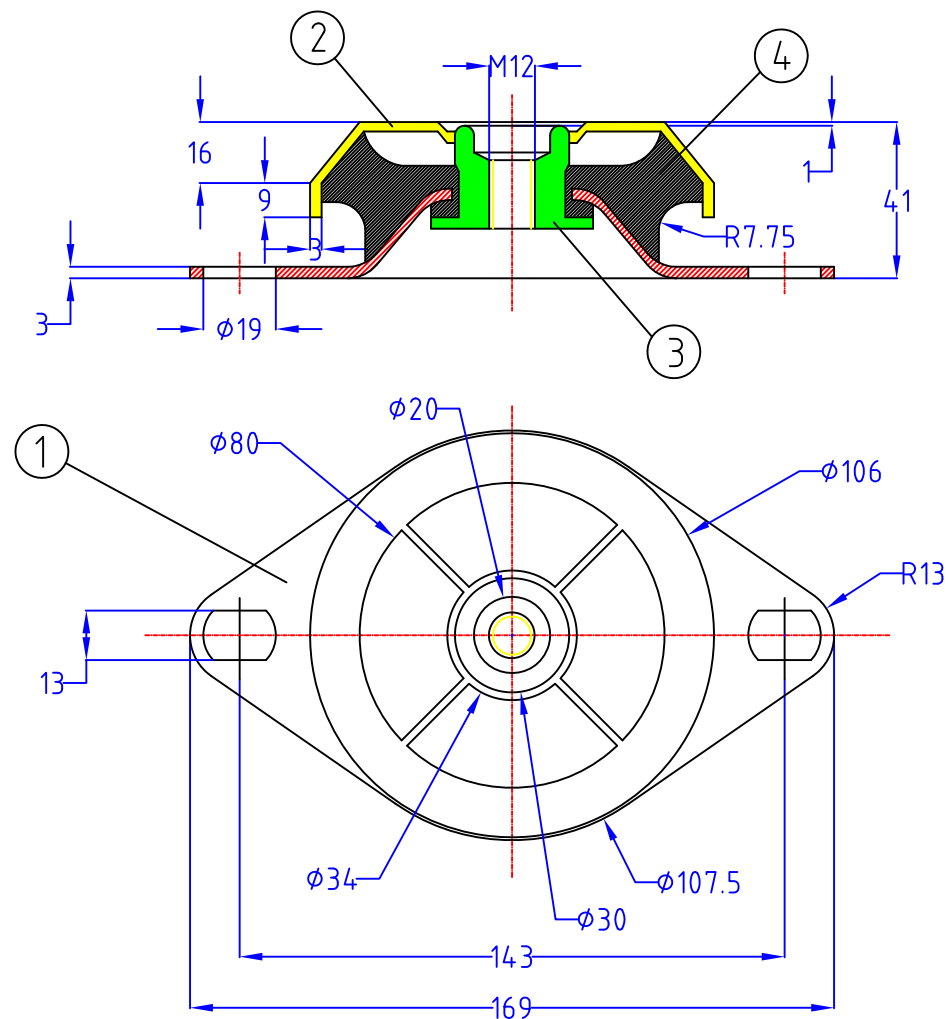

NOMBRE	FECHA	REVISADO	OBJETO DE REVISION	ESCALA	
A.G.	15.11.12	J.L.S. / R00	CREACION DEL PLANO	1:2	
B.S.	13.09.13	J.L.S. / R01	MODIFICACIÓN FORMATO/CORRECIÓN TOLERANCIAS		
A.G.	30.03.15	J.L.S. / R02	MODIFICACION CARACTERISTICAS INSERTOS		
A.G.	24.11.16	J.L.S. / R03	MODIFICACIÓN AGUJEROS RASGADOS DE LA BASE		
A.G.	30.04.19	J.L.S. / R04	REVISION GENERAL PLANOS		
					SCC110M12