



More Solutions

Electric Vehicle Supply Equipment with

Rugged HMI Touch Screen Solutions



Improve
Readability




Excellent
Durability




Environmental
Resistance



Responsive
Touch

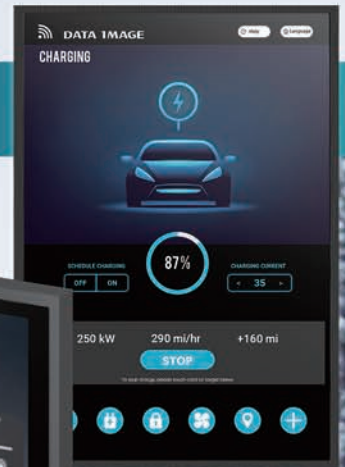

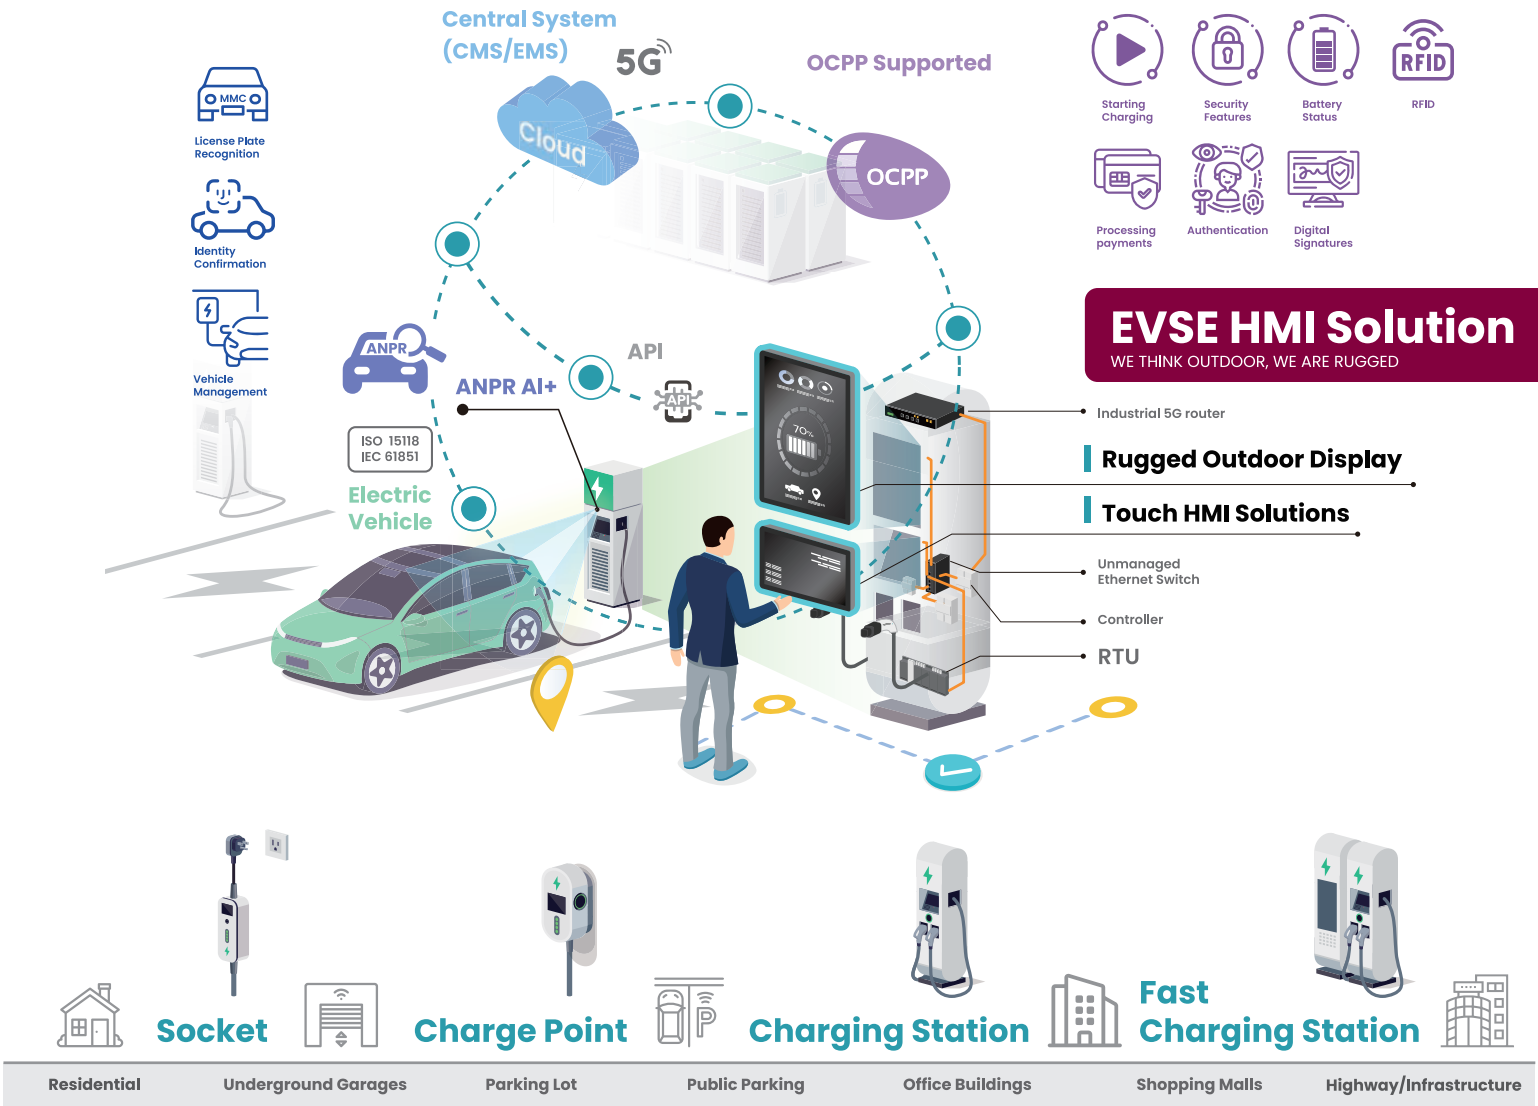

1
LEVEL

Lever 1 Charging=110V
AC, Home and Work
Charging; Primarily indoor,
private, and slow

2
LEVEL

Lever 2 Charging=240V
Destination and Public Charging, both slow
and fast; Outdoor (extended temperatures,
anti-glare) technology required

3
LEVEL

Lever 3 Charging=480V
Super Chargers Primarily in Public;
High-power FAST charging



Outdoor Industrial Display Specification

Size	7"	10.1"	12.1"	15.6"	21.5"	24"	27"	32"	43"
Resolution	800 x 480	1280 x 800	1024 x 768	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
			1280 x 800						
Contrast (typ)	800 : 1	800 : 1	800 : 1	800 : 1	5000 : 1	1000 : 1	1000 : 1	1200 : 1	4000 : 1
Brightness (nits)	1300	1000	1000	1500	1500	1500	1500	1500	1500
Voltage	DC 12-24V								
Interface	DP / HDMI / VGA / USB for touch								
Type	Open Frame	Monitor Open Frame	Monitor Open Frame	Monitor Open Frame	Open Frame	Open Frame	Open Frame	Open Frame	Open Frame
Operating Temp	-40~80 °C								

* The specifications of the product may be modified for improvement without notice.

