

Cold room and service doors
Global

Product portfolio

Cold room and service doors



Kingspan Group

Kingspan Group was founded in 1965 in Kingscourt, Co. Cavan, Ireland, and has grown from a small engineering and contracting business into a world leader in insulation and building envelope solutions.

As a family business, we cherish our heritage and our values, and we aim to offer the same local expertise, service and craftsmanship in every region in which we operate.

Our research and development centres play a crucial role in our continuous innovation, allowing us to respond ever more closely to our customers' needs. A growing network of regional offices keeps us within easy reach anywhere in the world.

Today, Kingspan has manufacturing facilities and offices across the Americas, Europe, the Middle East, Africa, Asia and Oceania. The Kingspan Group is organised into five operating divisions: Insulated Panels | Insulation | Light, Air + Water | Data + Flooring | Roofing + Waterproofing.

 **29** thousand
employees worldwide

 operating in more than
80
countries

 **278**
manufacturing sites
and R&D centres

 **9.2**
billion euro
revenue in 2025



Contents

Contents	3
Introduction	4
Our advantages	5
Our solutions	6
Hinged service door	elementa EHI-S / EHI-D 6
Hinged service door	performa PHI-S / PHI-D 8
Sliding service door	performa PSL-S 10
Swing service door	performa PSW-FS / PSW-FD 12
Swing service door	performa PSW-PS / PSW-PD 14
Hinged cold room door	therma THI-SP / THI-DP / THI-SN 16
Sliding cold room door	therma TSL-SP / TSL-SN 18
Sliding cold room door XL	therma TSL-XP / TSL-XN 20
Cold room hatch	therma THA-SP / THA-SN 22
Colour options	24
Discover your perfect door	25
Planet Passionate	26

Introduction

With more than fifty years of experience behind us, we have built a strong reputation as a supplier of high-quality door solutions. Because we specialise in cold and freezer storage and in logistics buildings, we know the specific requirements of these sectors inside out and can offer solutions that meet them precisely.



High-quality insulated doors for cold and freezer storage

Our extensive range covers a wide choice of insulated door types, including hinged doors and sliding doors. The doors are carefully engineered to meet the demanding requirements of cold and freezer storage. Whether you need to guarantee precise temperature control or to optimise the efficiency of your work processes, our doors strike the perfect balance between performance and durability.

Cold and freezer storage calls for doors that combine thermal insulation, robust durability and dependable functionality in order to maintain a constant temperature and ensure energy efficiency. Our doors are manufactured using high-quality materials and advanced insulation technologies that keep heat loss to a minimum, which means lower energy costs and better preservation of the goods in storage. They are also built to withstand intensive use and extreme conditions, guaranteeing a long service life and reliable performance.

Find the perfect door solution today

We will gladly help you find the ideal door for your specific needs. Contact us for more information about our products and how we can support you with solutions for your cold and freezer storage. Visit our website or contact our team of experts for personal advice.

elementa

Our highly competitive range of service doors comprises a hinged service door and, before long, a sliding service door. Designed for all your volume projects and with distribution in mind.

performa

Performa covers the complete range of service doors. It starts with the hinged service door, a sliding door and a swing door. This range has been designed specifically to answer every possible requirement. The extensive options make for a perfect door of unrivalled quality.

therma

This range of thermal doors includes doors for both positive and negative temperatures. Robustly engineered and elegantly finished to cope with the most extreme conditions. Alongside a hinged door there are 2 different sliding doors, depending on your requirements, and a hatch.



Hinged service door

EHI-S / EHI-D

elementa



The standard

Door frame: PVC

Panel thickness 40-110 mm (can be cut to size)

Door leaf finish: RAL9010

Galvanised steel

Door leaf thickness: 40 mm

Opening direction

Left-hand or right-hand

Door hardware

Stainless steel lever handle and hinges

Dimensions (cm)

Clear width: 60, 70, 80, 90, 100, 110, 120

Clear height: 200, 210, 220, 230

In stock

Dimensions (cm)

70x210, 80x210, 90x210

Door frame RAL9010

40-110 mm (can be cut to size)

Opening direction

Left-hand or right-hand





Your options

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010

Door hardware

- (1) Stainless steel WC lock (not pre-assembled) OPT.000.491
- (2) Panic bar + lever handle + lock (not pre-assembled) OPT.000.493
- (3) Panic bar without lever handle (not pre-assembled) OPT.000.495
- (4) Door closer, black, non-hold-open (DC200) (not pre-assembled) OPT.000.499
- (5) Door closer, ALU, non-hold-open (DC200) (not pre-assembled) OPT.000.483
- (6) Roller latch + 2x stainless steel door knobs (not pre-assembled) OPT.000.494
- (7) Black lever handle + black hinges (not pre-assembled) OPT.000.496

- Electric strike plate 24 V (open when de-energised) OPT.000.013
- Half-moon push plate (fitted) OPT.000.531

Door components

- Stainless steel vision panel ø350 mm, 2 pcs, for hinged door (double leaf) OPT.000.284
- Oval rubber vision panel 300x600 mm, 2 pcs (double leaf) OPT.000.180
- Stainless steel vision panel ø350 mm for hinged door OPT.000.283
- (8) Oval rubber vision panel 300x600 mm OPT.000.050
- (9) Surface-mounted draught brush (not pre-assembled) OPT.000.484
- (10) Brushed stainless steel protection plate 0.6 mm for hinged door (800 mm – 1 side) OPT.000.509

Packaging

- Individual packaging, hinged door (if >1 unit) OPT.000.521

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Hinged service door

PHI-S / PHI-D

performa



The standard

Door frame: ALU

Panel thickness min. 40, max. 280 mm
(wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 40 mm

Opening direction

Left-hand or right-hand

Door hardware

Stainless steel lever handle and hinges

Dimensions (cm)

Clear width (in 10 cm increments): 60 → 140
Clear height (in 10 cm increments): 200 → 300

In stock

Dimensions (cm)

70x210, 80x210, 90x210

Door frame

60 - 80 mm

Opening direction

Left-hand or right-hand



Your options

Door frame

- Stainless steel
- ALU RAL9010, adjustable
- ALU RAL7016, adjustable
- ALU anodised, adjustable
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010

Door hardware

- Fixed stainless steel lever handle (with roller latch), fitted OPT.000.530
- (1) Fixed stainless steel door knob OPT.000.337
- (2) Stainless steel WC lock (not pre-assembled) OPT.000.491
- (3) Panic bar + lever handle + lock OPT.000.507
- (4) Panic bar without lever handle OPT.000.508
- (5) Electric strike plate 24 V (open when de-energised) OPT.000.013

- Door closer, ALU, non-hold-open (DC200) (not pre-assembled) OPT.000.483
- Panic bar without lever handle (not pre-assembled) OPT.000.495
- Roller latch + 2x stainless steel door knobs (not pre-assembled) OPT.000.494
- (6) Door closer, black, non-hold-open (DC200) (not pre-assembled) OPT.000.499
- (7) Door closer, ALU, non-hold-open (DC200) (not pre-assembled) OPT.000.483
- (8) Black lever handle + black hinges OPT.000.524

Door components

- (9) ALU clip-in frame, laminated glass, 400x700x40 mm OPT.000.285
- (10) Oval rubber vision panel 300x600 mm OPT.000.050
- (11) Recessed drop seal OPT.000.019
- (12) Brushed stainless steel protection plate 0.6 mm for hinged door (800 mm – 1 side) OPT.000.509
- Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510
- Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512
- Half-moon push plate (fitted) OPT.000.531

Double leaf

- Recessed drop seal (double leaf) OPT.000.184
- Stainless steel vision panel ø350 mm, 2 pcs (double leaf) OPT.000.284

Packaging

- Individual packaging, hinged door (if >1 unit) OPT.000.521

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Sliding service door

PSL-S

performa



The standard

Door frame: ALU

Panel thickness min. 40, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 60 mm

Sliding direction

Left-sliding or right-sliding

Door hardware

Fixed stainless steel handle, recessed PVC flush pull and ALU rail

Dimensions (cm)

Clear width (in 10 cm increments): 80 → 200

Clear height (in 10 cm increments): 200 → 300



Your options

Door frame

- Stainless steel
- ALU RAL9010
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010

Door hardware

- (1) Pinlock lock for manual door OPT.000.259
- (2) Pinlock lock for automatic door OPT.000.260

Door components

- (3) ALU clip-in frame, laminated glass, 400x700x60 mm OPT.000.405
- (4) ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) OPT.000.190
- (5) Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512
- (5) Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510

Packaging

- Individual packaging, sliding door (if >1 unit) OPT.000.522

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Swing service door

PSW-FS / PSW-FD

performa



The standard

Door frame: ALU

Panel thickness min. 40, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 40 mm

Opening direction

Left-hand or right-hand


Door hardware

PVC hinges (RAL7016) with stainless steel core, 90° hold-open and oval vision panel

Dimensions (cm)

Clear width (in 10 cm increments): 70 → 120

Clear height (in 10 cm increments): 200 → 300

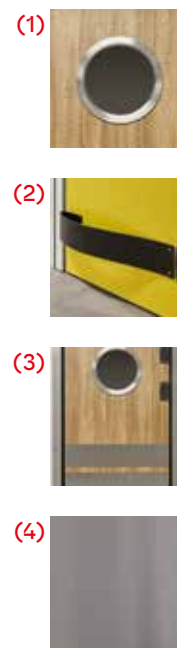

Your options

Door frame

- Stainless steel
- ALU RAL9010
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010

Door components

- (1) Stainless steel vision panel ø350 mm for hinged door OPT.000.049
- (2) Black plastic impact wings – 2 sides OPT.000.207
- (3) Brushed stainless steel push plate 0.6 mm (200 mm – 2 sides) OPT.000.030
- (4) Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510
- (4) Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512

Double leaf

- Double leaf OPT.000.513
- Stainless steel vision panel ø350 mm, 2 pcs (double leaf) OPT.000.134

Packaging

- Individual packaging, hinged door (if >1 unit) OPT.000.521

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Swing service door

PSW-PS / PSW-PD

performa



BUILT FOR DURABILITY



SERVICE & CONTROLLED ENVIRONMENT



PRE-MOUNTED FOR EASE

The standard

Door frame: ALU RAL9010

Panel thickness min. 15, max. 280 mm (wider wall thicknesses on request)

Door leaf finish

Polyethylene (PE), white

Door leaf thickness: 15 mm

Opening direction

Left-hand or right-hand

Door hardware

PVC hinges (RAL7016) with stainless steel core, 90° hold-open and oval vision panel

Dimensions (cm)

Clear width: 70, 80, 90, 100, 110, 120

Clear height: 200, 220, 240



(1)



(2)



Your options

Door frame

- Stainless steel
- PVC
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- Door leaf with $\varnothing 130$ mm opening OPT.000.352

Door components

- (1) Black plastic impact wings OPT.000.207
- (2) PE bumper strip 15mm x 100mmH x 2000mmL
– self-adhesive 2000mmL (not pre-assembled,
to be cut to size by the customer) OPT.000.154

Double leaf

- Double leaf OPT.000.513

Packaging

- Individual packaging, hinged door
(if >1 unit) OPT.000.521

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Hinged cold room door

therma

THI-SP / THI-DP / THI-SN



BUILT FOR DURABILITY



COLD & FREEZER ROOMS



PRE-MOUNTED FOR EASE

The standard

Door frame: ALU

Panel thickness min. 60, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 60 mm (positive)
100 mm (positive & negative)

Opening direction

Left-hand or right-hand

Door hardware

Fermob door handle (with lock and emergency release button) and adjustable hinges

Dimensions (cm)

Clear width (in 10 cm increments): 60 → 150

Clear height (in 10 cm increments): 200 → 300

In stock

Dimensions (cm)

80x210 / 90x210 / 100x210

Door frame


60 - 80 mm

Opening direction

Left-hand or right-hand

Temperature

Positive

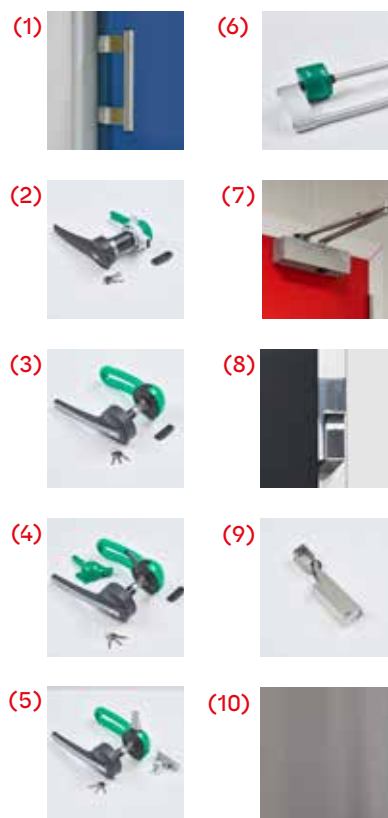

Your options

Door frame

- Stainless steel (positive temperatures only)
- ALU RAL9010
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010
- Door leaf thickness 100 mm OPT.000.329

Door hardware

- No lever handle (positive temperatures only)
- (1) EURO2000 door handle for ALU and stainless steel door frames (single-point locking) OPT.000.172
- (2) EURO2006 door handle OPT.000.023
- (3) EURO2016 door handle (single-point locking) OPT.000.258
- (4) EURO2016 door handle (three-point locking) OPT.000.268
- (5) Reversed single-point locking (positive temperatures only) OPT.000.341
- Vision panel, PVC frame, 400x700x60 mm OPT.000.527
- Vision panel, PVC frame, 400x700x100 mm OPT.000.528

- ALU clip-in frame, laminated glass, 400x700x60 mm OPT.000.405
- (6) Panic bar on (standard) door handle OPT.000.001
- (7) Door closer, ALU, non-hold-open (DC200) OPT.000.505
- (8) Chrome rising hinges OPT.000.269
- (9) Stainless steel door catch (not possible in combination with the standard lever handle) OPT.000.002

Door components

- (10) Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510
- (10) Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512

Freezer version

- Freezer version with PE threshold + heating element + 100 mm door leaf thickness OPT.000.514
- Freezer version without threshold + heating element along 3 sides of the frame + 100 mm door leaf thickness OPT.000.515
- Freezer version without threshold + heating element + finishing plate + 100 mm door leaf thickness OPT.000.516

Double leaf

- Double leaf (positive temperatures only) OPT.000.513

Packaging

- Individual packaging, hinged door (if >1 unit) OPT.000.521

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Sliding cold room door

therma

TSL-SP / TSL-SN



BUILT FOR DURABILITY



COLD & FREEZER ROOMS



PRE-MOUNTED FOR EASE

The standard

Door frame: ALU

Panel thickness min. 60, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 60 mm (positive)
100 mm (positive & negative)

Sliding direction

Left-sliding or right-sliding

Door hardware

Stainless steel lever door handle, recessed PVC flush pull and ALU rail

Dimensions (cm)

Clear width (in 10 cm increments): 80 → 240

Clear height (in 10 cm increments): 200 → 300



Your options

Door frame

- Stainless steel (positive temperatures only)
- ALU RAL9010
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010
- Door leaf thickness 100 mm

OPT.000.329

Door hardware

- (1) Stainless steel handle (only for door leaf widths <1500 mm) OPT.000.520
- (2) Pinlock lock for manual door OPT.000.259
- (3) Pinlock lock for automatic door OPT.000.260

Door components

- Vision panel, PVC frame, 400x700x60 mm OPT.000.527
- Vision panel, PVC frame, 400x700x100 mm OPT.000.528
- ALU clip-in frame, laminated glass, 400x700x60 mm OPT.000.405
- (4) ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) OPT.000.190

- (5) Rail pass-through + gooseneck (positive temperatures only) OPT.000.053
- (6) Sliding door wall guide OPT.000.470
- (7) Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510
- (7) Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512

Freezer version

- Freezer version with threshold + heating element + 100 mm door leaf thickness (for Elegant door) OPT.000.517

Packaging

- Individual packaging, sliding door (if >1 unit) OPT.000.522

Automation

- ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) / ALU150 OPT.000.190
- Horizontal photocell protection, pos. temp. EPE-ZPE-INE (1 pc) OPT.000.060
- Partial opening, includes 2x start/stop/ start push button OPT.000.062
- Warning light – 1 pc OPT.000.063
- Radar (motion detection) – 1 pc OPT.000.064
- Remote control receiver – 1 pc OPT.000.065
- Remote control, 1-channel transmitter OPT.000.066
- Soft Touch switch (MS9502) – 1 pc OPT.000.072
- Soft Touch switch (MS9502) – 2 pcs OPT.000.432
- Warning light – 2 pcs OPT.000.502
- Stainless steel tubular rail automation (including safety edge + accessories) OPT.000.196

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Sliding cold room door XL

therma

TSL-XN / TSL-XP



BUILT FOR DURABILITY



COLD & FREEZER ROOMS



PRE-MOUNTED FOR EASE

The standard

Door frame: ALU RAL9010

Panel thickness min. 60, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 60 mm (positive)
100 mm (positive & negative)
140 mm (negative)

Sliding direction

Left-sliding or right-sliding

Door leaf

Stainless steel lever door handles and ALU rail

Dimensions (cm)

Clear width (in 10 cm increments): 120 → 400

Clear height (in 10 cm increments): 200 → 560



Your options

Door frame

- ALU
- PVC clad with galvanised steel (choice of RAL colours)*
- PVC clad with stainless steel (choice of finishes)*

Door leaf*

- RAL1018, RAL3000, RAL5010, RAL6029, RAL7016, RAL9002, RAL9005, RAL9006, RAL9007, wood effect
- Stainless steel bright rolled
- Stainless steel brushed 4N
- Stainless steel sunbrushed
- Cleansafe PET RAL9010
- Cleansafe 150 RAL9010
- HDX 55 RAL9010
- Door leaf thickness 100 mm OPT.000.329
- Door leaf with mineral wool core (includes 100 mm door leaf thickness and positive temperatures only) OPT.000.477

Door hardware

- (1) Pinlock lock for manual door OPT.000.259
- (2) Pinlock lock for automatic door OPT.000.260

Door components

- (3) Manual stainless steel tubular rail for PVC door frame (including 100 mm door leaf thickness) OPT.000.411
- (4) ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) OPT.000.190
- (5) ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) / ALU250 OPT.000.194

- (6) Rail pass-through + gooseneck (positive temperatures only) OPT.000.053
- (7) Sliding door wall guide OPT.000.470
- (8) Brushed stainless steel protection plate 1.5 mm for clear width < 1200 mm (800 mm – 1 side) OPT.000.510

- (8) Brushed stainless steel protection plate 1.5 mm for clear width > 1200 mm (800 mm – 1 side) OPT.000.512

Freezer version

- Freezer version without threshold + heating element along 3 sides of the frame + 100 mm door leaf thickness OPT.000.515
- Freezer version with threshold + heating element + 100 mm door leaf thickness (for Smart door) OPT.000.518

Packaging

- Individual packaging, sliding door (if >1 unit) OPT.000.522

Automation

- ALU rail automation (including 100 mm door leaf thickness + safety edge + accessories) / ALU150 OPT.000.190
- Horizontal photocell protection, pos. temp. EPE-ZPE-INE (1 pc) OPT.000.060
- Partial opening, includes 2x start/stop/ start push button OPT.000.062
- Warning light – 1 pc OPT.000.063
- Radar (motion detection) – 1 pc OPT.000.064
- Remote control receiver – 1 pc OPT.000.065
- Remote control, 1-channel transmitter OPT.000.066
- Soft Touch switch (MS9502) – 1 pc OPT.000.072
- Soft Touch switch (MS9502) – 2 pcs OPT.000.432
- Warning light – 2 pcs OPT.000.502
- Stainless steel tubular rail automation (including safety edge + accessories) OPT.000.196

Looking for a customised configuration? Contact us today!

T: +32 56 71 04 94 E: sales@isomasters.com *See all available finishes on p. 26.

Cold room hatch

THA-SP / THA-SN

therma



The standard

Door frame: ALU

Square frame

Panel thickness min. 60, max. 280 mm (wider wall thicknesses on request)

Door leaf finish: RAL9010

Galvanised steel + cleansafe 25 µm (0.63 mm)

Door leaf thickness: 60 mm (positive)
100 mm (positive & negative)

Opening direction

Left-hand or right-hand

Door hardware

Fermob door handle (with lock and emergency release button) and reinforced hinges

Dimensions (cm)

Clear width: 62, 70, 80, 90, 100, 110

Clear height: 62, 70, 80, 90, 100, 110



Your options

Freezer version

- Freezer version with heating element + 100 mm door leaf thickness OPT.000.519

Packaging

- Individual packaging, hatch (if >1 unit) OPT.000.521

Colour options

CLEANsafe 25 µm



CLEANsafe 25
RAL 1018
0.75 mm



CLEANsafe 25
RAL 3000
0.75 mm




CLEANsafe 25
RAL 5010
0.75 mm



CLEANsafe 25
RAL 6029
0.75 mm



CLEANsafe 25
RAL 7016
0.63 mm



CLEANsafe 25
RAL 9002
0.63 mm




CLEANsafe 25
RAL 9005
0.63 mm



CLEANsafe 25
RAL 9006
0.75 mm



CLEANsafe 25
RAL 9007
0.75 mm




CLEANsafe 25
RAL 9010
0.63 mm



CLEANsafe 25
Wood effect
0.75 mm

High-performance coatings



Stainless steel 304
0.63 mm



Stainless steel 304
Brushed 4N
0.63 mm



Stainless steel 304
Sunbrushed
0.63 mm



CLEANsafe PET
RAL 9010
0.63 mm



CLEANsafe 150
RAL9010
0.63 mm



HDX 55
RAL 9010
0.63 mm

Discover your perfect door

Visit our showroom & experience centre!

Step into our showroom and see our full range of doors up close. See the different door types in action, discover the many ways they can be personalised and experience the quality for yourself. Whether you are looking for a standard design or a bespoke solution, we have it all – and you can even try your hand at fitting one yourself!

- **Discover every door type** – From standard models to bespoke solutions: see them for real!
- **Do it yourself** – Try fitting doors yourself with different frames and finishes.
- **Bespoke in the spotlight** – Personalise your doors with a wide range of colours, finishes and extra options.
- **Expert advice** – Our team will gladly help you choose the perfect door for your project.
- **An interactive experience** – Feel the quality and craftsmanship with your own hands.




Come and see us today and bring your ideas to life!

To arrange a visit to our showroom or production hall, email sales@isomasters.com or contact your key account manager on +32 56 710 494



Planet Passionate

Through our ambitious global group-wide environmental sustainability programme, we aim to make a positive impact on three major challenges: climate change, circularity and the protection of the natural environment. We take our responsibility in this seriously, and we believe that advanced materials, innovative building systems and digital technologies have a key role to play in addressing these global concerns.

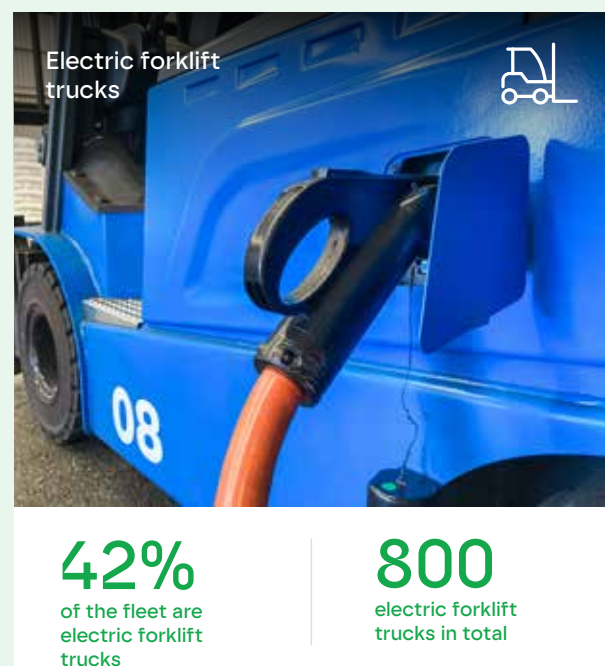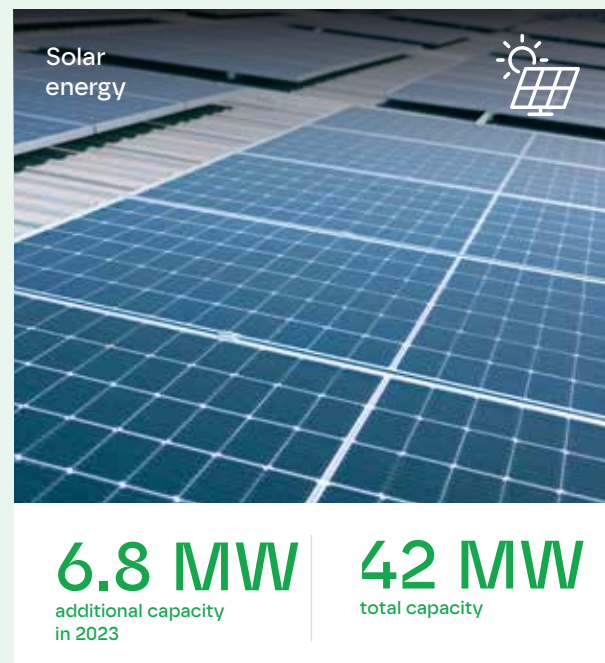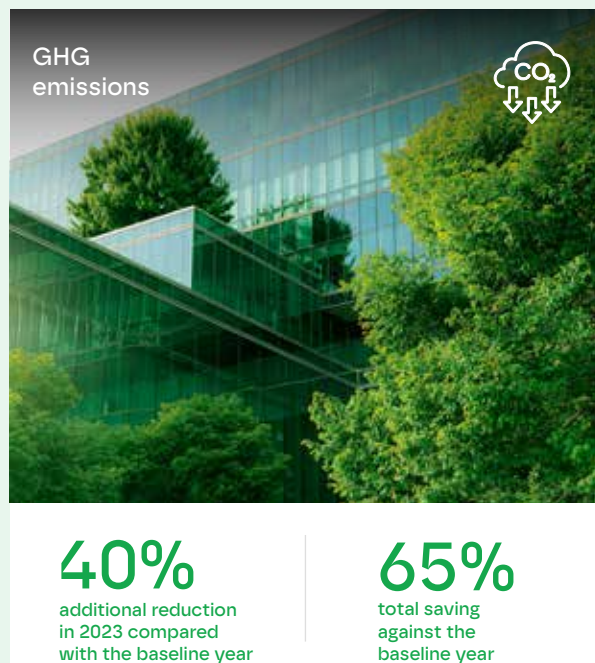

Request your Technical Guide today

Looking for detailed specifications
of the doors in this brochure?
Our Technical Guide contains all the technical
information you need.

Available on request from
sales@isomasters.com, or contact
your key account manager on +32 56 710 494.



Contact details

Global

Isomasters NV
Pontstraat 80
BE-8791 Waregem

T: +32 56 71 04 94
E: sales@isomasters.com
www.isomasters.com

Browse and order doors from stock in our webshop:
webshop.isomasters.com

To check that you have the latest version of this brochure, go to www.isomasters.com.

Kingspan strives for the greatest possible accuracy in this publication, but cannot be held liable for any errors. The applications, product uses and working methods described are for information purposes only and imply no liability. Kingspan reserves the right to change specifications.



isomasters
By Kingspan