

## FUTURE-PROOFING THE WORLD OF DRY BULK SOLIDS HANDLING

FUTURE-PROOF VALUE SINCE 1950

### **TABLE OF CONTENTS**

WHY DMN-	02	R		
ABOUT DMM	04	SA		
				RI
DMN-WESTI	NGHOL	JSE PRODUCTS	22	Sł
HEAVY-DUT	Y ROTA	RY VALVES	26	R
DROP-THROUGH				In
Multipurpose	AL/AXL	Round flanges	30	D
	AML	Round & square flanges	32	Ve
	USAL	Square flanges	34	Cr
Granular	GL	Round flanges	35	Be
Replacement	NR		36	
Sanitary	SAL		37	D
<b>BLOW-THROUGH</b>				Pl
BL/BXL/BXXL		Round flanges	38	
OPTIONAL SLIDE	RAILS			
MZC-I & MZC-I	l (GL, SAL an	d USAL excluded)	40	Τι
MEDIUM-DU	JTY RO	ARY VALVES	42	
DROP-THROUGH				Fl
Multipurpose	MLD	Round & square flanges	44	Ba
	MALD	Round flanges	44	C
Dust valve	DL	Universal flanges	46	C

ROTARY VALVE OPTIONS
Rotor configurations
Coating options
Drive options

<b>ROTARY VALVE SOLUTIONS</b>	54
SAS-II	55
RID 3.0	56
Shaft seal flow control	58
<b>ROTARY VALVE ACCESSORIES</b>	60
Inlet restrictor	60
Drop-out box	61
Vent box	61
Cradle for MZC-I and MZC-II	61
Bearing toolkit	61

DIVERTER VALVES				
Plug type	PTD-II	64		
	SPTD & SPTDS	66		
	GPD	68		
Tube type	2-TDV & 3-TDV	70		
	M-TDV	72		
Flap type	FDV-P & FDV-F	74		
Ball type	BTD	75		

COMPONENTS	76
Pressure relief valve (PRV)	76
Compression couplings	76
Discharge unit (DUC)	77

### **OPTIMISE YOUR FLOW**

When dry bulk handling is part of your industrial process, DMN-WESTINGHOUSE is the partner offering you efficient and affordable solutions. Whether you are in dairy, plastics, aquaculture, chemicals, or any other industry handling dry bulk, we specialise in implementing future-proof solutions that enhance the efficiency of your dry bulk flow.

### FUTURE-PROOF QUALITY

What are your biggest challenges concerning international rules and regulations? How can you maximise the uptime of your conveying processes? How can you increase product quality while decreasing costs for maintenance and repairs? With decades of experience designing and manufacturing high-end rotary valves and diverter valves, we know exactly what you need. Today and in the future.

### **RELIABLE PARTNERS WORLDWIDE**

No matter your inquiry or the challenges you face in dry bulk handling, our extensive network of sales offices and distributors guarantees local and timely support. Our specialists are on hand to assist you in selecting the most suitable solution for your unique requirements. Beyond the initial setup, we remain committed to the efficiency of your operations by offering comprehensive operator training and a robust approach to spare parts and maintenance.

"Our engineering and support teams are always nearby" "We help you comply with the rules and regulations regarding hygiene, safety, and durability"

### **FUTURE-PROOFING** THE WORLD OF DRY BULK SOLIDS HANDLING

At DMN-WESTINGHOUSE, we are all about process continuity, not only regarding your dry bulk handling processes, but also when it concerns our own company. That's why we have never strayed from designing, manufacturing, and innovating rotary valves and diverter valves. This hyperfocus has made us the leading brand worldwide.

On the basis of our extensive experience, we offer tailored solutions and solid support to customers worldwide. By pushing the boundaries of technical engineering and rotary valve and diverter valve design, we help you comply with the rules and regulations regarding hygiene, safety, and durability.

Our focus on high-end quality, innovation, and reliability has led to our valves being qualified, certified, and verified to the highest standards. We call that future-proof value because we are always a step ahead for your benefit and that of ourselves.

#### **DMN-WESTINGHOUSE: FUTURE-PROOF VALUE SINCE 1950**



### **OUR VALUES**

### WE ARE DEDICATED

Every day, we push the boundaries of technical engineering and the design of our rotary valves and diverter valves to find future-proof solutions that help our customers surpass themselves and their competitors. We take pride in our skills and work meticulously to get things right. We aim to make a difference and deliver the high-end quality our customers rely on.

### WE ARE RELIABLE

We are a dependable business partner, always ready to help, always there to act, and consistently delivering on our promise. We are open and honest with each other and our customers. We demonstrate this in our communications, in our work, and in how we operate. We trust and inspire each other to fulfil our mission together. We help each other when faced with difficulties.

### WE ARE PROACTIVE

At DMN-WESTINGHOUSE, we don't wait for the future; we are proactive. We constantly look for ways to improve our products and services to benefit our customers. We take all their questions and concerns about developments in their business seriously. We are a learning organisation; we are flexible and quick to adapt.

### WE ARE RESPONSIBLE

We care for our environment and the world we are part of. We do everything we can to minimise waste and use our resources as economically and sustainably as possible. We respect others and treat other people as we would like to be treated. We are an inclusive employer, and we embrace diversity in our workforce. We take responsibility for a safe and healthy workplace and for our colleagues' well-being.

### **SUSTAINABILITY AT OUR CORE**


At DMN-WESTINGHOUSE, we're at the forefront of sustainable innovation for the dry bulk handling industry. Our mission is to provide enduring, future-proof solutions that go beyond short-term gains. We focus on eco-friendly, efficient, durable designs while reducing waste and energy use to meet our customers' sustainability goals and boost their profitability.

Our global commitment to sustainability is manifested through our alignment with the United Nations Sustainability Goals (SDGs) and our EcoVadis certification. We prioritise environmental care, waste reduction, and efficient use of resources. Our inclusive, respectful workplace culture ensures a safe, healthy environment for our diverse team.

Beyond our economic goals, we strive to make a positive impact. We integrate sustainability in our business model, aiming to contribute significantly to a better, more sustainable world. This drives us to create solutions that benefit our planet and our customers.



"Future-proof solutions that go beyond short-term gains"

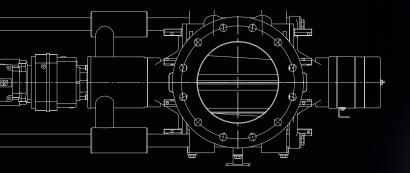

### **ENGINEERING EXCELLENCE**

At DMN-WESTINGHOUSE, our engineers have the necessary expertise to design rotary and diverter valves for bulk handling, and they create solutions that meet customer requirements while adhering to safety, reliability, efficiency, and industry standards.

The R&D department has a proactive and ambitious approach, aiming to be at the forefront of technological advancements while keeping a keen eye on customer needs. This combination of innovation, technology, and customer focus is key to staying competitive and successful in today's dynamic business environment. Product development and testing happens in collaboration with partners that are leading companies in product and material handling. "With an endless drive for innovation, their goal is always to stay ahead"

### QUALIFIED, VERIFIED, CERTIFIED!

DMN-WESTINGHOUSE has the knowledge, skills, and experience to provide the configured solutions you need. We will, therefore, continue to ensure our products are qualified, verified, and certified to the highest standards.

DMN-WESTINGHOUSE's rotary valves and diverter valves are renowned for their reliability and durability, earned through continuous innovation and improvement. Driven by industry feedback, we focus on safety, efficiency, ease of cleaning, and reliability. Our products' certifications reflect our commitment to delivering exceptional value. Today and in the future.

### **BUILT TO SERVE YOUR PURPOSE**

### HYGIENIC

In certain industries that handle dry bulk, like food or pharma, hygienic production is not just a standard, but a necessity. Adherence to stringent hygiene protocols ensures product purity and safety, protecting against contamination risks. This commitment to cleanliness is fundamental in delivering quality and maintaining consumer trust. DMN-WESTINGHOUSE has developed hygienic heavy-duty rotary valves and diverter valves that ensure product safety by design. These rotary valves and diverter valves are certified to comply with USDA, EHEDG and 3-A sanitary standards. They facilitate quick and easy cleaning, cutting downtime, and boosting productivity.

### **EXPLOSION-PROOF**

In the dry bulk industry, the risk of explosions poses a significant challenge, demanding constant vigilance. At DMN-WESTINGHOUSE, we understand these hazards and emphasise the critical importance of explosion-proof solutions. Our advanced safety measures are designed to mitigate risks, ensuring a secure environment for dry bulk processing. This commitment to safety protects both the integrity of operations and the well-being of personnel.

We manufacture rotary valves and diverter valves with ATEX and NFPA69 certification for industrial environments with a high risk of explosions. ATEX, derived from the French "ATmosphères EXplosibles", sets essential standards for equipment used in explosive atmospheres. For industry professionals, compliance with ATEX is not just a regulatory requirement; it's a commitment to operational safety and reliability. For the United Kingdom, we support the UKEX certification.

### HIGH-QUALITY PRODUCTS FOR VARIOUS INDUSTRIES


DMN-WESTINGHOUSE excels in delivering customised dry bulk handling solutions across a spectrum of industries, from agriculture to energy and pharmaceuticals to construction. Our expertise lies in tailoring each solution to meet the distinct needs of every sector, ensuring efficient and reliable handling of materials, whether it's grain, highly abrasive minerals, pharmaceutical granules, or construction aggregates. Our commitment to quality, reliability, and customisation positions us as the leading global provider of industry-specific bulk-handling equipment.











COSMETICS























### INDUSTRY-SPECIFIC APPLICATIONS FOR OUR PRODUCTS

### **ROTARY VALVES**

	HEAVY-DUTY								MEDIUM-DUTY			
		D	ROP-TI	IROUC	H		BLOW-THROUGH OPTIONAL SLIDE RAILS					
ТҮРЕ	AL/AXL	AML	USAL	ថ	M	SAL	BL/BXL BXXL	MZC/ MZC/	MZC-II	WLD	MALD	Б
Aquaculture	V	v	v				√	V	V			V
Animal feed	v	v	v	v			V	V	V	٧	v	V
(EV) Batteries	v	v	v				V					v
Biomass	v	v	v				√					v
(Petro)chemicals	v	V	v		v	v	√	V		v	v	
Cosmetics	v	v	v		٧	v	√	V	V	v	v	v
Dairy	v	v			٧		√	V	V			V
Food	v	v	v		v		√	V	V	V	V	V
Infant formula	v	v			v		√	V	v			v
Minerals	v	v	v				√			V	V	
Paint	V	V	v				√	V	V	V	V	V
Pet food	v	v	v				√	V	V	v	V	V
Pharma	v	v			٧	v	√	V	V			V
Plastics	٧	٧	v	V			√			V	v	V
Recycling	٧	٧	v				√			v	v	v
Rubber	٧	٧	v				√					

### **DIVERTER VALVES**

		PLUC	ТҮРЕ			ТИВЕ ТУРЕ		FLAP	ТҮРЕ	BALL TYPE
ТҮРЕ	PTD-II	SPTD	SPTDS	GPD	2-TDV	3-TDV	M-TDV	FDVP	FDVF	BTD
Aquaculture	V			v	√	V	V			
Animal feed	V	V	V	V					V	
(EV) Batteries	V	v	V	V				V	v	V
Biomass	V	V	V	V				V	V	V
(Petro)chemicals	v	v	v	v	V	V	V		V	
Cosmetics	V	V	V	V	V	V	V		V	
Dairy	v			V	V	V	V			
Food	V	v	V	V	V	V	V		V	
Infant formula				V	V	V	V		V	
Minerals	V	v	V	V				V	V	V
Paint	v	v	V	v			V	V	V	V
Pet food	V	V	V	V	V	V	V			
Pharma	v		V	V	V	V	V			
Plastics	V	V	V	V				V	V	V
Recycling	V	v	v	v				V	V	V
Rubber	V	V	V	V				V	V	V

### FIRST-CLASS SUPPORT

Our commitment extends beyond engineering excellence; we empower your company with comprehensive operational training and preventive maintenance. Our global network of distributors and sales offices ensures local, timely support and a seamless service experience, keeping your operations uninterrupted and efficient.

As more than just a supplier, DMN-WESTINGHOUSE is a dedicated partner in your success, with our after-sales department playing a pivotal role in helping you achieve operational excellence.

### **AFTER-SALES DEPARTMENT**

To ensure optimal performance and durability of your DMN-WESTINGHOUSE products and components, we proactively assist you in managing wear and tear. Worn-out parts can result in downtime, dust, and potential damage. Our global after-sales department is the core of every service you could need after purchasing DMN-WESTINGHOUSE products, from spare parts and refurbishment to training your service engineers and handling warranties. If you need guidance on replacing worn parts or optimising your spare part usage, contact your DMN-WESTINGHOUSE office or authorised distributor for expert assistance.

#### WE ARE HERE TO SUPPORT YOU WITH:

General service, spare parts, training of service engineers and authorised service partners, (re)certifications, refurbishment, and warranty handling. "Our after-sales department is the core of every service you could need after purchasing our products"



### THE IMPORTANCE OF CHOOSING THE RIGHT SOLUTION

Selecting the appropriate rotary valve or diverter valve is crucial, particularly considering the material type and system configuration. This is important for managing material flow and ensuring safety, particularly for combustible materials. A diverter valve is ideal for redirecting material flow, while a rotary valve is specifically engineered for metering and precise flow control.

Also, different materials require different housing and configurations. To assist you

in selecting the most suitable rotary valve or diverter valve, we have organised our rotary valves into heavy- and medium-duty categories, offering drop-through and blowthrough types. Our diverter valves also offer a range of diverse types and configurations that can be tailored to your specific needs.

Diverter valves are categorised into various types based on operating principles and design, such as plug, tube, flap, or ball types.

### **HEAVY- AND MEDIUM-DUTY**

The heavy-duty category is for crucial conveying procedures with minimum air leakage and high filling efficiency. The medium-duty category is designed for general-purpose applications where simple construction and direct drive provide exceptional value for money.

### **DROP- AND BLOW-THROUGH**

Drop-through rotary valves manage material flow from the inlet to the outlet. They excel in gravity and pressure scenarios, feeding various types of downstream equipment. They can feed a pneumatic conveying line when equipped with a drop-out box. Drop-through rotary valves are ideal for multiple valve systems with a design that ensures product integrity.

Blow-through rotary valves handle cohesive materials like cocoa, flour, or milk powders. Their unique design integrates seamlessly with pneumatic convey lines, efficiently clearing sticky substances from rotor pockets. While too compact and unsuited for highly abrasive materials, a blow-through rotary valve is perfect for specific applications requiring lower-profile solutions.




### **DIVERSITY IN DIVERTER VALVES**


Our diverter valves are suitable for various applications, depending on your specifications. The plug-type diverter valves excel in versatility. The gravity plug-type diverter valves offer variety in the number of pipes and can handle quick product changes. The tube type diverter valves are USDA-approved for hygienic processes. The flap-type diverter valves offer efficient sealing while conveying various materials. Last – but not least – are the ball-type diverter valves, which excel in abrasive environments through easy maintenance.

### DMN-WESTINGHOUSE IN YOUR SYSTEM

The rotary valves and diverter valves from DMN-WESTINGHOUSE form the reliable foundation for safe and efficient dry bulk handling systems across a diverse range of industries. Depending on your requirements and system specifications, the properties of our products can be customised to achieve optimal results. This applies to functionality, and in terms of maintenance and cleaning.

DMN-WESTINGHOUSE offers rotary valves and diverter valves tailored for specific applications, such as processing abrasive pellets or sticky dairy ingredients. Additionally, our range includes rotary valves that serve as ideal replacements for discontinued brands like Niro. Whatever you are looking for, DMN-WESTINGHOUSE has a reliable solution.

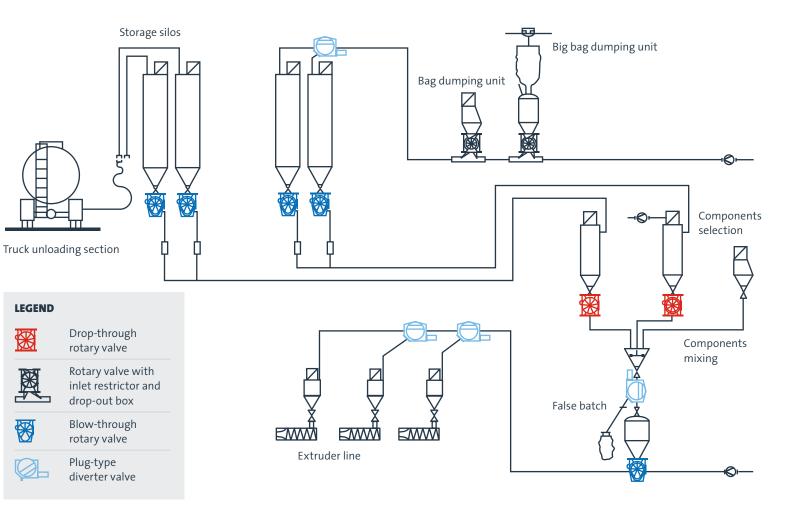

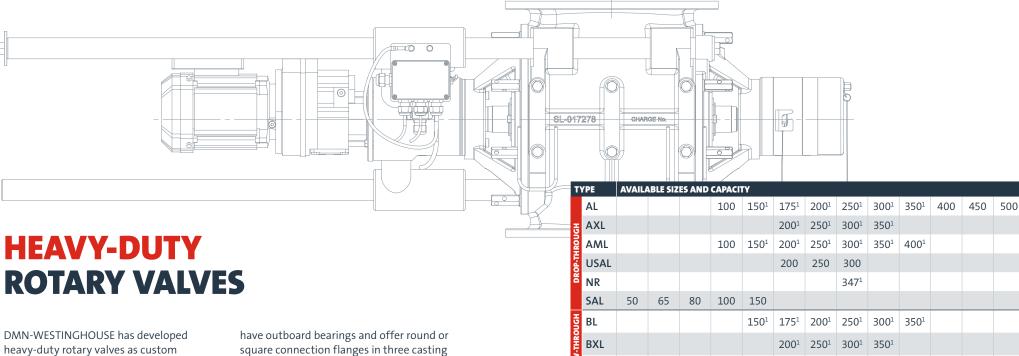

BXXL

GL

'At 100% filling.

Ltr./rev.\*

TYPE

Ltr./rev.<sup>\*</sup> 0.07 0.13 0.25 0.8 2.5 5.5 10.5 19

300

350

79

AVAILABLE SIZES AND CAPACITY

250

10 17.5 32

<sup>1</sup> Versions for dairy processing and MZC, MZC-I, and MZC-II available.

150 200

5

DMN-WESTINGHOUSE has developed heavy-duty rotary valves as custom solutions for a wide range of applications involving the metering and pneumatic conveying of products in powder and granular form. The heavy-duty rotary valves are available in a drop-through or blowthrough variant and offer great capabilities, like minimum air leakage and high filling efficiency. The heavy-duty rotary valves have outboard bearings and offer round or square connection flanges in three casting materials: stainless steel, cast iron, and aluminium, with a wide range of shaft seals and rotor models to select from. Available in various sizes (flange inlets 100-500), with a pressure rating of 2 barg and a standard temperature range<sup>^</sup> up to +150°C (optional up to +600°C).

<sup>^</sup>Size 400/450/500 reduced pressures according to PED.

350<sup>1</sup>

34

58

91 135 230

Our heavy-duty rotary valves provide solutions to meet every industry standard and specific production needs. A few examples:

- We have designed a hygienic rotary valve that is USDA-accepted and EHEDG-certified. It can be opened from one or two sides for easy access and offers an optional slide to facilitate complete rotor extraction for cleaning.
- We have developed the RID 3.0, a detection unit to protect your process and products from metal contamination. As with any rotating parts, such contamination can occur for several reasons.
- We offer ATEX certification for equipment or protective systems (explosion barriers). This certification ensures the rotary valves comply with the necessary safety standards and regulations for explosive atmospheres.
- We offer various coatings and models for handling abrasive materials to enhance durability.
- We offer rotary valve types to minimise product degradation of granules, for example, in the plastics industry, to maintain product quality.



This model is also available with a chain drive and a direct drive without coupling.



## R C ROTARY VALVE

The AL and AXL rotary valves, adept in metering and conveying powders and granules, feature modular designs for various configurations. With its larger inlet, the AXL excels in managing products with challenging flow properties. These stainlesssteel rotary valves are ideal for the food and pharmaceutical sectors, which meet USDA Dairy and EC1935/2004 standards, offering easy disassembly and high hygiene. MZC models simplify rotor and end cover removal by adding rails, while the adaptable AML variant transitions between round and square interfaces, enhancing versatility in system design.

### **SPECIFICATIONS**

- · Minimum air leakage.
- High filling efficiency.
- Sheared angle inlet.
- Large inlet size in relation to rotor volume.
- Customised solutions.
- Easily detachable versions available.
- Drilled flanges in accordance with PN10, ANSI 150lbs.
- Temperature up to +150°C.
- Pressure up to 2 barg.
- Temperature range customised models: -200°C to +600°C.
- EHEDG Type ED class II certification available.
- USDA Dairy-accepted.

The AXL size corresponds with the dimension of the inlet flange.

ТҮРЕ	AVAILABLE SIZES AND CAPACITY									
AL	100	150	175	200	250	300	350	400	450	500
AXL			200	250	300	350				
Ltr./rev.*	0.8	2.5	5.5	10.5	19	34	58	91	135	230

'At 100% filling.



- ATEX APS-certified versions withstand pressures up to 10 barg.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.
- ATEX Autonomous Protective System (APS) certification available.

This model is also available with a chain drive and a direct drive without coupling.



## AML ROTARY VALVE

The AML rotary valves are suitable for many applications in the metering and pneumatic conveying of products in powder and granular form. These valves can also act as a transition piece from round to square and vice versa. The AML rotary valve range also includes USDA Dairy-accepted models and versions compliant with the EC1935/2004 directive for sanitary use in the food and pharmaceutical industry. These stainlesssteel rotary valves are easily detachable and meet the highest hygienic standards.



• Temperature up to +150°C.

• Temperature range customised models:

Pressure shock resistance customised

ATEX Autonomous Protective System

• ATEX 2014/34/EU certification available.

(APS) certification available.

• EC1935/2004-compliant version available.

• Pressure up to 2 barg.

-200°C to +600°C

models up to 10 barg.

### **SPECIFICATIONS**

- · Minimum air leakage.
- High filling efficiency.
- Sheared angle inlet.
- Easily detachable versions available.
- Customised solutions.
- Large inlet size in relation to rotor volume.
- Drilled flanges in accordance with PN10, ANSI 150lbs.
- Body with one round and one square flange.
- Used as an adapter piece from round to square and from square to round.

ТҮРЕ	AVAILABLE SIZES AND CAPACITY										
AML	100	150	200	250	300	350	400				
Ltr./rev.*	0.8	2.5	5.5	10.5	19	34	58				

\*At 100% filling.

HEAVY-DUTY ROTARY VALVES

This model is also

without coupling.

available with a chain

drive and a direct drive

## ₩₩WSAL ROTARY VALVE

The USAL rotary valves have been designed for many applications in the metering and pneumatic conveying of products in powder and granular form. The USAL has square inlet/outlet flanges. It has an enlarged inlet, designed for applications where inlet size is more important than capacity, or for handling products that flow poorly.

TYPE	AVAILABLE SIZES AND CAPACITY							
USAL	200	250	300					
Ltr./rev.*	5.5	10.5	19					
201./101.		10.5						

'At 100% filling.

### SPECIFICATIONS

- Minimum air leakage.
- High filling efficiency.
- Sheared angle inlet.
- · Customised solutions.
- Easily detachable versions available.
- Full cast iron versions available.
- Temperature up to +150°C.
- Special configurations for temperatures up to +400°C available.
- Pressure up to 2 barg.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

### © 𝔄 M GL ROTARY VALVE

The GL rotary valves are specially designed for gravity feeding and pneumatically conveying of granular products.

The configuration of the body and rotor has been developed specifically to minimise product degradation while retaining the best possible pocket-filling efficiency.

ТҮРЕ	AVAIL	ABLE SI	ZES AN	D CAPA	сіту
GL	150	200	250	300	350
Ltr./rev.*	5	10	17.5	32	79

'At 100% filling.

This model is also

without coupling.

available with a chain

drive and a direct drive

### SPECIFICATIONS

- High filling efficiency.
- Maximum protection against product degradation.
- Large air vent opening.
- Available with direct drive or chain drive.
- Robust construction.
- Flanges drilled in accordance with PN10, ANSI 150 lbs.
- Temperature up to +150°C.
- Pressure up to 1.5 barg.
- ATEX 2014/34/EU certification available.

This model is also available with a chain drive and a direct drive without coupling.



# Image: Image

Thinking of replacing your existing Niro rotary valves? Our NR (Niro Replacement) rotary valve matches the outer dimensions of the existing Niro rotary valve in your system, meaning they are an exact fit for most of the time. Our replacement rotary valves are based on the AL250 model, and made of stainless steel. They meet all hygiene and safety standards, ensuring their future-proof value.

C	DE	<b>c</b> ı	EI	c I	0	NS
Э	re	L	L I	LF	U	NЭ

- Exact-fit rotary valve dimensions.
- Easy installation.
- Inlet round outlet square.
- Versions with guide rails are available.
- USDA Dairy-accepted.
- Product surfaces are FDA-approved.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

ТҮРЕ	AVAILABLE SIZES AND CAPACITY
NR347	347
Ltr./rev.*	19

'At 100% filling.

## SAL SANITARY ROTARY VALVE

The SAL rotary valve is a low-capacity rotary valve with a highly polished surface inside and outside. The SAL is suitable for metering applications where very high hygienic standards, and ease of operation and cleaning are required. The complete rotary valve can be dismantled for inspection and cleaned in minutes, thus reducing eventual downtime and production loss.

ТҮРЕ	AVAILA	AVAILABLE SIZES AND CAPACITY										
SAL	50	65	80	100	150							
Ltr./rev.*	0.07	0.13	5.5	0.8	2.5							

\*At 100% filling.

### **SPECIFICATIONS**

- For sanitary use.
- · Low capacity.
- · Easily detachable rotor.
- The complete valve is highly polished (inside and outside).
- Temperature up to +100°C.
- Pressure up to 1 barg.
- Product surfaces are FDA-approved.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

This model is also available with a chain drive and a direct drive without coupling.



# Image: Second secon

Engineered for precision in metering and pneumatic conveying, our BL, BXL, and BXXL rotary valves easily handle powder and granular products. Their modular design allows for diverse configurations. The BXL rotary valve, with its enlarged inlet, excels in applications demanding larger inlets or processing products that do not flow smoothly, with the BXXL offering an even greater inlet size. Crafted from cast iron, stainless steel, or aluminium, these rotary valves are quickly detachable, maintaining the highest hygienic standards. The BL, BXL and BXXL models also come in MZC versions, featuring supportive rails for effortless end cover and rotor removal without damaging the housing.



### **SPECIFICATIONS**

- · Minimum air leakage.
- High filling efficiency.
- Sheared angle inlet.
- Easily detachable versions available.
- Drilled flanges in accordance with PN10, ANSI 150lbs.
- Temperature up to +150°C.
- Pressure up to 2 barg.

The BXL and BXXL size corresponds with the dimension of the inlet flange.

ТҮРЕ	AVAILABLE S	AVAILABLE SIZES AND CAPACITY								
BL	150	175	200	250	300	350				
BXL	L		250	300	350					
BXXL				350						
Ltr./rev.*	2.5	5.5	10.5	19	34	58				

EHEDG Type ED class II certification available.

USDA Dairy-accepted.

Customised solutions.

• ATEX 2014/34/EU certification available.

ATEX Autonomous Protective System

(APS) certification available.

\*At 100% filling.

MZC-I

- Unprecedented cleanability.
- Easier and safer maintenance than before.
- · Applications for a broad range of industries.
- Cleaning In Place (CIP): the rotor can remain in position during cleaning.
- Additional safety through an integrated emergency safety switch.

Which rotary valve you choose depends on your requirements for hygiene and access to the rotary valve.

### **MZC-I** CHARACTERISTICS

- Space-efficient one-sided opening.
- Various drive options.

TYDE

# AVAILABLE SIZES AND CAPACITY

I TPE		AVAILADLE	AVAILABLE SIZES AND CAPACITY						
_	AL	150	175	200	250	300	350		
DROP- THROUGH	AXL		200	250	300	350			
gĔ	AML	150	200	250	300	350	400		
	NR				347				
. <del>3</del>	BL	150	175	200	250	300	350		
BLOW- THROUGH	BXL		200	250	300	350			
₽₽	BXXL				350				
Ltr.,	/rev.*	2.5	5.5	10.5	19	34	58		

\*At 100% filling.



### MZC-II CHARACTERISTICS

- Opens on two sides for unprecedented ease of access and superior cleanability.
- Only a direct drive is offered, to allow for ease of opening and cleaning.

Meet the MZC-I and MZC-II, our top-level range of rotary valves that sets the standard in the field of safety, hygiene, and cleanability. Today and in the future. Extreme durability and efficiency, combined with ease of cleaning, make the MZC-I and MZC-II the reliable core of your production processes. Maximise your output while

**MZC-I AND MZC-II ROTARY** 

**VALVES WITH SLIDE RAILS** 

🔜 🐼 🎞 🚥 USDA 🏴

cutting time and costs for maintenance and thorough cleaning.

MZC-II

**MZC-I** The all-purpose rotary valve with a compact design.

**MZC-II** The ultimate rotary valve that meets the highest hygiene requirements.

### alves ndards neres. TYPE SIZES AND CAP

TYPE	SIZES A	SIZES AND CAPACITY					
DL VAIVE	200	250	300				
Ltr./rev.*	6	8.5	19				

'At 100% filling.

## **MEDIUM-DUTY ROTARY VALVES**

DMN-WESTINGHOUSE has developed a specialised product line of medium-duty rotary valves to address customer needs in scenarios where rotary valves with outboard bearings (heavy-duty rotary valves) might be considered excessive. A simple construction and direct drive contribute to providing exceptional value for money.

Medium-duty rotary valves feature inboard bearings and are available in a drop-through design, providing a select range of shaft seals and rotor configurations. They come in various sizes with flange inlets ranging from 100 to 400 mm, can handle a pressure differential of up to 1 barg, and operate within a standard temperature range of up to +65°C.

For applications in potentially explosive environments, the medium-duty rotary valves come with ATEX certification. This certification ensures the rotary valves comply with the necessary safety standards and regulations for explosive atmospheres.

TYF	ÞE	AVAILABLE	SIZES AND	CAPACITY				
P. H. D. H. D. H. D. H. D. H. D. H.	MLD	100	150	200	250	300	350	400
THRO	MALD	100	150	175	200	250	300	350
Ltr.	/rev.*	0.8	2.5	5.5	10.5	19	34	58

At 100% filling.




$\tilde{\mathbf{z}}$	
-	
DROP-THR	<u>The second seco</u>
	MLD rotary valve
IVE	

MALD rotary valve

DOUG



MLD



### 

The MALD and MLD medium-duty rotary valves offer exceptional value and versatility for various applications. Ideal for vacuum conveying, big bag unloading, cyclone applications, and general purposes, both rotary valves are distinguished by their simple construction and direct drive. Using the AL rotary valve body with two round flanges, the MALD rotary valve is optimal for powder handling. In contrast, the MLD rotary valve features an ML rotary valve body with larger round and square flanges, enhancing its efficiency with free-flowing products and facilitating transitions between different connections.

MALD



### **SPECIFICATIONS**

- Compact design.
- Sheared angle inlet/outlet.
- Suitable for frequency inverter control.
- Standard fitted with direct drive.
- Round flange drilling available for PN10 and ANSI 150 lbs.
- The MALD is used as an adapter piece from round to square and from square to round.

•	Temperature	up	to	+65	°C
---	-------------	----	----	-----	----

- Pressure up to 1 barg.
- Pressure shock resistant up to 10 barg.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

ТҮРЕ	AVAILABLE	VAILABLE SIZES AND CAPACITY									
MLD	100	150	200	250	300	350	400				
MALD	100	150	175	200	250	300	350				
Ltr./rev.*	0.8	2.5	5.5	10.5	19	34	58				

'At 100% filling.

300

19

### **SPECIFICATIONS**

- · Minimum air leakage.
- Suitable for both round and square counter flanges.
- Rotors available with adjustable polyurethane or fixed chamfered mild steel blades.
- Ex-stock delivery for standard models.
- Flameproof versions available.
- Temperature up to +70°C.
- Pressure up to 0.5 barg.

DL

Ltr./rev.\*

At 100% filling.

- ATEX Autonomous Protective System (APS) certification available.
- ATEX 2014/34/EU certification available.

**AVAILABLE SIZES AND CAPACITY** 

250

8.5

200

6

The DL dust lock is a rotary valve with a	rotary valve are used for round or square	
dedicated design for filter applications.	connections. This application is much more	ТҮРЕ
It can be used with dust filters, cyclones,	sensitive to dust explosions; therefore, we	ITPE

sensitive to dust explosions; therefore, we have ATEX-certified this valve for equipment or protective systems (explosion barriers).

48

×3

**DL ROTARY VALVE** 

product separators, and dosing systems.


The universal flanges on both sides of the



## **ROTARY VALVE OPTIONS**


### **ROTOR CONFIGURATIONS**

At DMN-WESTINGHOUSE, we have a rotor for every application. With specific rotors, we can effectively tune every rotary valve to optimal performance for your specific application, from ultimate hygiene to resisting abrasive materials.



#### **FIXED VANES**

- All-purpose component.
- Chamfered vanes to reduce surface friction.
- Suitable for hygienic applications.
- Radius pockets to help discharge sticky/hygroscopic products.



#### **REPLACEABLE AND ADJUSTABLE BLADES**

- · Choose blade materials based on application requirements: steel, hardened steel for abrasive materials, stainless steel for corrosion resistance and sterility, polyurethane for nonfriable granular products, and scraper blades for products that compress and build up on the surfaces, to minimise torque loads.
- Blades can be easily replaced to maintain tight clearances, rather than replace the complete rotor.
- Support bars can be used to reinforce the rotor when handling hard building products such as lactose and PVC powder.



#### RESILIENT EDGE

- Designed to handle heavy-duty applications.
- Reinforced vane edges, which protect the end covers.
- Distributes friction evenly across the entire end cover surface.
- The protective end plates and vane edges can easily be repaired.

REDUCED CAPACITY

• When products have very


poor flow characteristics,

requiring an abnormally large inlet throat.

**CLOSED END** 

Fixed vanes or

adjustable blades.



#### SEMI END DISC WITH REPLACEABLE AND ADJUSTABLE BLADES

- Used for handling abrasive materials.
- Offers additional wear protection.
- Standard for 4TS model.
- Blades can be easily replaced to maintain tight clearances rather than replace the complete rotor.



#### END DISC FIXED VANES

- Commonly used when handling pelletised products, such as plastic pellets.
- Protects against end cover wear.



#### SCALLOPED POCKETS

• Smooth rotor pockets are used to help discharge sticky/ hygroscopic products.



#### FINE DOSING

 Used on metering applications when a specified throughput is required with a good level of accuracy.



### **COATING OPTIONS**

Coatings play a crucial role in extending the lifespan of rotary valves and maintaining their performance in challenging processes, like the handling of minerals, where corrosion and abrasion are concerns. Choosing the right coating depends on the specific requirements of the process and the level of protection needed. Coatings can be applied to protect rotary valve parts such as the body, end covers, and rotors.

#### HARD CHROME COATING (PLATING)

Hard chrome coating (plating) as a cost-effective substitute for stainless steel. Hard chrome coating can be used for budget-friendly food applications or mild abrasive conditions.

#### **NICKEL COATING**

Nickel coating as an alternative to stainless steel for non-food applications (not for MZC rotary valve).

#### **TUNGSTEN COATING**

Tungsten coating can be used for moderate to highly abrasive products.

#### HARD ANODISING

Hard anodising the aluminium parts of rotary valves provides improved wear resistance.

### **DRIVE OPTIONS**

### **DRIVE CONFIGURATIONS**

We offer three types of drive configurations for our rotary valves. Each drive type is suited to fit specific system setups.



#### **CHAIN DRIVE**

- Compact, takes less space.
- By changing the chain wheel ratio, you can change rotor speed to get the correct throughput.
- Safety overload protection: the chain will break.

- Requires regular maintenance.
- Less hygienic.
- Not for ATEX zone 1-21.
- Not for RID.
- Not for medium-duty.



#### **DIRECT DRIVE WITH COUPLING**

- Rotor speed can be changed with the help of a frequency inverter/VFD.
- Minimum maintenance.
- Mandatory for MZC-II.
- Mandatory for RID option.
- Recommended for hygienic installation
- Not for medium-duty.



### DIRECT DRIVE WITHOUT COUPLING

- Compact design (length).
- Recommended for hygienic installation.
- Rotor speed can be changed with the help of a frequency inverter/VFD.
- Minimum maintenance.
- Drive is directly connected to the rotary valve.
- Not for RID.
- Not for medium-duty.

### ROTARY VALVE SOLUTIONS

Our R&D engineering team constantly develops innovative solutions that simplify our customers' work. The team's activities result in concrete product innovations and solutions that solve problems on a process level, like preventing product contamination or extending service life.



### SAS-II ROTARY VALVE HEAVY-DUTY SHAFT SEAL

Process engineers in today's food and pharmaceutical sectors require dependable, easy-to-maintain equipment that meets top safety standards. At DMN-WESTINGHOUSE, we've innovated the SAS-II air purge shaft seal, designed to eliminate leakage issues reliably. Building on the proven success of our original SAS shaft seal, the SAS-II is more compact and prevents overtightening. Choose SAS-II for assured performance and ultimate peace of mind in your operations.

### ROTOR INTERFERENCE DETECTION RID 3.0

The Rotor Interference Detection system (RID) detects unwanted contact between the rotor, body, or end covers and warns the operators of possible contamination of the conveyed product. Incorporate the RID into your system for alerts on product accumulation or metal contact. Next to its analogue outputs, the third-generation RID offers EtherNet/IP<sup>TM</sup> or 4-20mA output communication, enhancing your network's automation capabilities.

DMN-WESTINGHOUSE rotary valves are produced to the strictest tolerances, and rotor movement is not likely to occur. However, movement can occur if the rotor becomes damaged by foreign objects passing through the rotary valve. In that case, the rigid and straightforward design of the RID ensures problem-free operation. It features a user-friendly service tool for maintenance and troubleshooting. CE and CSA certification confirm compliance with international safety and performance standards.





### SHAFT SEAL FLOW CONTROL

Discover our solution that boosts the reliability of AL and BL heavy-duty rotary valve series (including AXL, BXL, BXXL and NR) even more: the DMN-WESTINGHOUSE Shaft seal flow control. This flow control system ensures a consistent and controlled airflow, even in the face of pressure variations, to protect the shaft seals and prevent wear, ultimately contributing to the reliability and performance of your equipment. Unlike pressure, airflow can be monitored precisely to register blockages or leaks.

Flow control is the go-to solution for CIP processes. On top of that, accurate flow control prevents the build-up of powder residue on the shaft seals that could lead to seal failure, causing contamination, leakage, damage, and downtime for cleaning and repair.

### **ROTARY VALVE ACCESSORIES**

The rotary valves and diverter valves of DMN-WESTINGHOUSE can be upgraded with accessories that enhance their functionality or adapt their properties to suit specific conveying processes.



### **INLET RESTRICTOR**

When controlled material flow is required, the inlet restrictor prevents shearing and keeps material away from the rotor tips, minimising the risk of jamming.




### **DROP-OUT BOX**

The adapter is designed to connect the discharge of the rotary valve to a pneumatic or vacuum conveying line. This is particularly useful when handling abrasive products, as it allows for easier cleaning of the rotary valve without the need to remove the piping.



### VENT BOX

The vent box is used to collect and vent the pressurised air within the rotor pockets and vent any air leakage over the rotary valve, to improve the filling efficiency of the rotary valve. It ensures smooth material flow and contributes to the overall effectiveness and of the pneumatic conveying system.



### CRADLE FOR MZC-I & MZC-II

Your rotor can be taken out as a whole (finger-safe rotor extraction) and placed in this cradle for precision cleaning.



### **BEARING TOOLKIT**

Worn-out bearings can cause severe damage to your rotary valves. The toolkit allows you to properly replace the bearings of your rotary valve for a perfectly functioning product.

### **DIVERTER** VALVES

DMN-WESTINGHOUSE has developed diverter valves for rapid pipe changeover between powders and pellets in pneumatic conveying systems. Diverter valves are categorised into various types based on operating principles and design, such as plug, tube, flap, or ball types, each suited for pipe changeover tasks. The selection of a diverter valve type typically hinges on the application's specific requirements and the characteristics of the materials being conveyed.

T١	/PE	AVAILA	BLE SIZE	S							
	PTD-II	50	65	80	100	125	150	200			
PLUG	SPTD	150	162	200	213	250	267	300	318	350	400
PL	SPTDS	50	65	80	100	125					
	GPD	150 <sup>1</sup>	200 <sup>1</sup>	250 <sup>1</sup>	300 <sup>1</sup>						

Т	YPE	AVAILABL	E SIZES					
ä	2-TDV/3-TDV	40 <sup>1</sup>	50 <sup>1</sup>	65 <sup>1</sup>	80 <sup>1</sup>	100 <sup>1</sup>	125 <sup>1</sup>	150 <sup>1</sup>
Ē	2-TDV/3-TDV M-TDV	40 <sup>1</sup>	50 <sup>1</sup>	65 <sup>1</sup>	80 <sup>1</sup>	100 <sup>1</sup>	125 <sup>1</sup>	150 <sup>1</sup>
Ρ	orts (M-TDV only)	4 up to 14	4 up to 13	4 up to 12	4 up to 11	4 up to 10	4 up to 8	4 up to 7

T	/PE	AVAILABLE SIZES											
\$	FDV-F	50	65	80	100	125	150	200	250				
3	FDV-P	50	65	80	100	125	150						

T١	'PE	AVAILABLE SIZES									
BALL	BTD	65	80	100	125	150	200	250			

<sup>1</sup> Versions for dairy processing available.

PTD-II diverter valve	SPTD diverter valve	
SPTDS diverter valve	GPD diverter valve	
2-TDV diverter valve	<b>B-TDV</b> diverter valve	M-TDV diverter valve
-		



PLUG TYPE

**TUBE TYPE** 



**DIVERTER VALVES** 

### SPECIFICATIONS

- Two-channel design.
- · Minimal maintenance.
- Compact form.
- Versions with electrical drive available.
- · Wear-resistant pipes optional.
- Temperature range: -25°C to +80°C at ambient temperatures of -10°C to +40°C.
- Pressure up to 3 barg with static seals.
- Sizes 50-150 up to 6 barg with inflatable seals.
- Pressure shock-resistant up to 10 barg<sup>\*</sup>.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.



ТҮРЕ	AVAILABLE SIZES									
PTD-II	50	65	80	100	125	150	200			







Size 200 excluded

😥 प्र 🏧

**PTD-II DIVERTER VALVE** 

The user-friendly, foolproof design enables quick on-site, in-depth inspection, cleaning

and, when necessary, replacement of

seals. The PTD-II design complies with all

current legislation regarding safety in the

workplace. As such, the exterior of this

diverter valve is free of moving parts.

The PTD-II plug-type diverter valves have

been specially designed to route powders and pellets with minimum degradation

Precision machining, proper sealing, and

guarantee a smooth passage of the product.

an obstruction-free internal geometry

in pneumatic conveying systems.






### • No moving parts on the outside. · Various options available. • Static or inflatable seals (SPTD), static seals (SPTDS).

**SPECIFICATIONS** 

Universal application.

• For diverting only.

• Temperature up to +80°Cat ambient temperatures between -10°C and +40°C.





- SPTD: pressure up to 3 barg static seal and pressure up to 6 barg inflatable seal.
- SPTDS: pressure up to 1 barg static seal.
- Pressure shock resistant up to 10 barg.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

The SPTD and SPTDS single pipe plug diverter valve is specially designed to route powders and pellets with minimum degradation in pneumatic conveying systems. Precision machining, proper sealing, and an obstruction-free internal geometry guarantee a smooth passage of the product. The user-friendly, foolproof

€x) 兄 ™

design enables quick on-site internal examination, cleaning and, when necessary, replacement of seals. The design of the SPTD and SPTDS plug diverter valves complies with all current workplace safety legislations. As such, the exterior of this diverter valve is free of moving parts.

SPTD

**SPTD/SPTDS** DIVERTER VALVE

68

# GPD DIVERTER VALVE

The GPD, a two-way gravity diverter valve, is perfect for systems needing regular, quick cleaning with minimal downtime. Its design ensures swift disassembly and easy access to all contact surfaces, even when installed. It offers unrestricted material flow, free of ledges or dead spots. Available in various finishes, including sanitary specifications, the GPD also features USDA Dairy-accepted models. It efficiently diverts gravity-fed material to two lines, using a plug that rotates 120°, sealing the inactive port with precision-engineered tolerances.



### **SPECIFICATIONS**

- Rugged cast construction.
- Change on the fly with most powders.
- Easily detachable design.
- No pressure difference allowed.
- One-piece body with removable end plates and rotating blade assembly.
- Pneumatic or manual operation.
- Flanges drilled according to PN10 or ANSI 150 lbs.

ТҮРЕ	AVAILABLE SIZES							
GPD	150	200	250	300				

Available in stainless steel AISI 316.

• Temperature range: -10°C to +80°C.

• USDA Dairy-accepted version available.

• ATEX 2014/34/EU certification available.

• EC1935/2004-compliant version available.

cast iron, and aluminium.



70

### 😥 🖫 USDA 🏴 **2-TDV/3-TDV DIVERTER VALVE**

The 2-TDV is a compact diverter valve for pneumatically conveyed powders or pellets. It facilitates material transport to/from two locations. Engineered for precision, the 3-TDV diverter valve expertly handles the pneumatic conveyance of powder or pellet materials to/from three destinations. Its compact design incorporates an extra line cylinder, ensuring accuracy in tube positioning.

3-TDV

They both ensure precise tube positioning and offer easy disassembly for out-of-place

cleaning (COP). Alternatively, in-place cleaning (CIP) is achievable through line purging with cleaning liquid, without diverter valve removal. Complete removal is necessary only for thorough cleaning. This flexibility allows the customisation of cleaning methods to fit specific processes. Versions meeting stringent hygienic standards, including USDA Dairy acceptance, are available for specialised applications.

2-TDV



### **SPECIFICATIONS**

- · Converging and diverging applications.
- Multiple choice of line connections.
- Minimised product degradation.
- A uniform, smooth bore pipe between the inlet and outlet.
- Inflatable seals.
- Easy detachable construction.

ТҮРЕ	AVAILABLE	AVAILABLE SIZES									
2-TDV/3-TDV	40	50	65	80	100	125	150				

• All stainless steel or aluminium/stainless

• Temperature range: -20°C to + 100°C.

• USDA Dairy-accepted versions available.

• EC1935/2004-compliant version available.

• ATEX 2014/34/EU certification available.

• Pressure range: -0.8 to 3 barg.

steel configurations.

# ₩

The M-TDV efficiently handles the pneumatic transport of powders or pellets, facilitating diverging and converging flows to multiple destinations. Its design ensures high positional accuracy with minimal components. Available in sizes from 40 to 150 mm, it offers up to 14 ports on larger models for smaller pipe sizes. The standard setup includes the diverter valve unit and a pre-programmed controller with an integrated PLC compatible with binary code input from the customer's PLC. The range also features USDA Dairyaccepted models.

### **SPECIFICATIONS**

- Converging and diverging applications.
- Up to 14 ports.
- Compact design.
- · Minimised product degradation.
- A uniform, smooth bore pipe between the inlet and outlet.
- Inflatable seals.
- All product contact materials FDA-approved.
- Temperature range: -20°C to + 100°C.
- Pressure range: -0.8 to 3 barg.
- USDA Dairy-accepted versions available.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

ТҮРЕ	AVAILABLE	AVAILABLE SIZES									
M-TDV	40	50	65	80	100	125	150				
Number	4 up	4 up	4 up	4 up	4 up	4 up	4 up				
of ports	to 14	to 13	to 12	to 11	to 10	to 8	to 7				



74



### **FDV-P/FDV-F DIVERTER VALVE**

The FDV flap-type diverter valves are designed to divert powders and pellets in pneumatic conveying systems. The FDV is available in two versions: the FDV-F type with flange ends and the FDV-P type with pipe ends. Both versions are available in aluminium, cast iron, and stainless steel. The FDV has three operating modes: a pneumatic actuator, an electrical actuator, and manual operation.

### **SPECIFICATIONS**

- Compact form, simple construction, optimal sealing.
- Minimal pressure loss.
- Available with flange or pipe fittings.
- Flanges drilled in accordance with PN10, ANSI 150 lbs.
- Cast iron, aluminium, or 316 stainless steel.
- Temperature range: -10°C to +80°C.
- Pressure range: -300 barg up to 2 barg.
- EC1935/2004-compliant version available.
- ATEX 2014/34/EU certification available.

ТҮРЕ	AVAILAB	AVAILABLE SIZES										
FDV-F	50	65	80	100	125	150	200	250				
FDV-P	50	65	80	100	125	150						

### **BTD DIVERTER VALVE**

(Ex)

The BTD ball-type diverter valve, adept at handling abrasive products, is well-suited for high-pressure and high-temperature settings, commonly found in thermoelectric power plants (handling coal and fuel oil ash), incinerators, foundries, and cement, glass, chemical, and other industries. Versatile in function, it facilitates both diverging and converging of materials. In diverging applications, the product itself acts as the wear surface. For converging, its impact area is significantly reinforced. Constructed from robust ductile spheroidal cast iron, the BTD is designed for durability and efficiency.

## TYPE AVAILABLE SIZES BTD 65 80 100 125 150 200 250

### **SPECIFICATIONS**

- Designed to handle abrasive products.
- Suitable for systems with high pressures and temperatures.
- Replaceable wear bushings on the outlet.
- Grease-lubricated shaft seals.
- Seals replaceable with the valve in place.
- Body made from ductile spheroidal cast iron.
- Temperature range: -10°C to +80°C.
- Pressure range: -0.5 to 6 barg.
- Higher temperature-resistant versions can be manufactured upon request.
- ATEX 2014/34/EU certification available.

DIVERTER VALVES

DIVERTER VALVES

### **COMPONENTS**




### PRESSURE RELIEF VALVE (PRV)

The DMN-WESTINGHOUSE pressure relief valve is a crucial safety device that prevents vessels like hoppers or silos from exploding (due to overpressure) or imploding (due to excessive vacuum). It maintains atmospheric pressure by releasing excess pressure or allowing air in to equalise vacuum conditions. This automatic valve is adjustable, ensuring safety and protecting personnel and equipment. It is constructed for outdoor conditions.

### **COMPRESSION COUPLINGS**

The original Morris compression coupling is designed to join pipe and tubing for pneumatic conveying systems. Couplings are made of heavy-gauge zinc-plated steel. The gaskets are available in white neoprene and a variety of other materials and are easy to install.

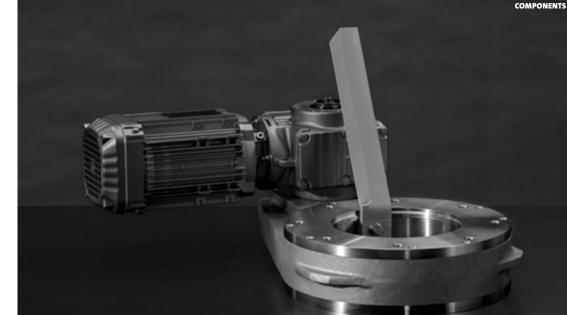

### DISCHARGE UNIT (DUC)

The DMN-WESTINGHOUSE discharge unit is designed to prevent product bridging at the hopper outlet (up to 5 m<sup>3</sup>). A rotating paddle inside the hopper cone keeps the product in motion. This design is particularly beneficial when dealing with mixed products, as the rotating blade helps to avoid product separation at the hopper outlet. The discharge unit guarantees a smooth product flow and maximises the filling efficiency of the component installed below the unit (e.g. a rotary valve).

All product contact surfaces are manufactured from stainless steel, and the discharge unit has specially designed seals to withstand internal pressures up to 1 barg at +100°C.



### CONTACT



### WORLDWIDE DISTRIBUTION NETWORK

We are a global company with sales offices and distributors around the world. With our knowledge and expertise, we provide custom-made solutions and support to meet the unique needs of each customer. For more information and other inquiries, please contact your local sales team or distributor. You can find a complete list of distributors at <u>dmnwestinghouse.com/distributors</u>.

#### THE NETHERLANDS

#### **DMN-WESTINGHOUSE**

Gieterij 3 2211 WC Noordwijkerhout +31 252 361 800 sales@dmnwestinghouse.com

#### GERMANY

#### **DMN SGT GMBH**

Lanzstraße 1 D-21244 Buchholz in der Nordheide +49 4181 931 40 dmn.sgt@dmnwestinghouse.com

#### FRANCE

#### **DMN FRANCE SAS**

Abbaye Royale de Yerres 20, Rue Raymond Poincaré F-91330 Yerres +33 1 69 49 85 70 contact.fr@dmnwestinghouse.com

#### USA

#### DMN INC.

220 South Woods St. West Memphis, AR 72301 +1 870 733 9100 sales.us@dmnwestinghouse.com

#### UNITED KINGDOM

#### DMN UK LTD

Units 1 & 2, 9 Harris Road Porte Marsh Industrial Estate Calne, Wiltshire, SN11 9pt, UK +44 1249 818 400 dmn.uk@dmnwestinghouse.com

#### INDIA

#### **DMN INDIA PRIVATE LIMITED**

2nd floor, no. 28 Gnt Road | SF No. 58/2a Thandalkalani, Puzhal, Tiruvallur Chennai – 600066, Tamil Nadu +91 9940482573 india@dmnwestinghouse.com



Nothing of this publication may be copied or reproduced in any other form. Printing errors and changes reserved. ©2024 DMN-WESTINGHOUSE.

