

REMOTE CONTROLLED DEVICES

With a remote-controlled tool-carrier or a track mower, you always work from a safe position, free from direct emissions like vibrations, noise and exhaust fumes. This makes green space maintenance safer and more comfortable, especially for areas that are difficult to access.

agria 9700e	Page 12
agria 9600	Page 16
agria 9500-90	Page 18
agria 9500-80	Page 20
agria 9500-70	Page 22

Benefits at a glance:

- Always safe even on dangerous areas
- Working with fun factor
- Do the jobs fast and efficient
- Handling is very easy to learn

agria special



agria 9700e



agria 9600



agria 9500

One **agria**. Many possibilities!

Video:
Watch the **agria**
9500 in action




REMOTE CONTROLLED HIGH GRASS ROTARY MULCHER

agria 9500-90

Benefits at a glance:

- Versatile applications due to 90 cm working width
- Powerful engine
- Better maintainability
- Even distribution of clippings
- Fine cutting result, ideal for visible areas, for example in parks
- Maintenance-free, brushless electric engine and generator
- Low fuel consumption and high performance due to electric hybrid drive
- More robust belt drive
- Inclined tanks
- Extremely manoeuvrable on steep slopes up to 50° (119 %)

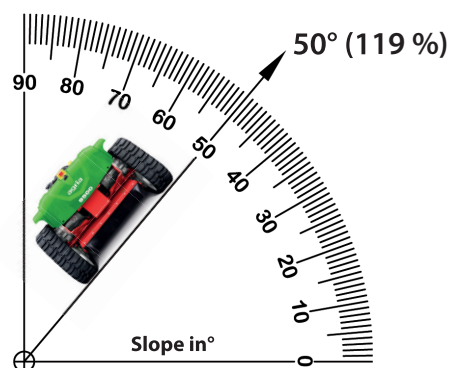

EXTRA ROBUST

With the agria 9500-90, you can mulch vegetation up to three years old. The optional scrub bracket pushes the cut material down so that it is guided even better to the blades.

Options



LED signal beacon



Fuel can 10 l



Scrub bracket



Crawler tracks with non-slip cleat-profile



Branch deflector



Battery charging cable



Comfortable and safe control of all machine functions via remote control. Machine information on large 2.8" display.

TECHNICAL SPECIFICATIONS

	agria 9500-90
Article number	9500 321
Engine	Kawasaki FS730V EFI 2-cylinder 4-stroke OHV petrol engine 17.7 kW (24.0 HP)
Torque	53,4 Nm at 2.400 U/min
Fuel system	1 x 10 litre; removable fuel tanks by Agria
Drive system	Step- and brushless electric drive, 48 V DC, Safety Extra Low Voltage
Speed ranges / Speeds	3 speed ranges can be selected stepless range 1: 0 - 2 km/h; range 2: 0 - 3.8 km/h; range 3: 0 - 5.8 km/h
Brake	Electromechanical Fail Safe Brake
Slope capability	50° (119 %)
Mower	High grass rotary mulcher
Blade	1 blade carrier with blade for dense vegetation (4 swinging blades)
Mower drive	Belt drive with electromagnetic clutch
Working width	90 cm
Cutting height	50 - 150 mm, adjustable by remote
Surface power	max. 3.500 m²/h (5 km/h)
Remote Control	Autec-Safety RC-System with 2.8" display
Max. range	max. 300 m
Recommended working range	max. 100 m
Tilt sensor for the remote control	•
Dimensions L x W x H	125 x 126 x 68 - 79 cm
Ground pressure	0,13 kg/cm²
Weight (with full fuel canisters) (without branch deflector)	approx. 412 kg

- Standard equipment

Flaps certified
(DIN EN 12733:2019-09)



agria 9500 321



Powerful engine



Equipped as standard:
Remote control with
tilt sensor



Removable-fuel-tank-
system by Agria



Fine cutting result due
to specially formed
mulching blades



Protection against
thrown objects: Safety
flaps tested

REMOTE CONTROLLED HIGH GRASS
ROTARY MULCHER

agria 9600



TECHNICAL SPECIFICATIONS

	agria 9600-112	
Article number	9600 241	
Engine	Kawasaki FS730V EFI Air-cooled 2-cylinder 4-stroke OHV petrol engine 17.7 kW (24.0 HP)	
Torque	53.4 Nm at 2.400 rpm	
Fuel system	2 x 10 litres (2 x 2.6 gal); Agria Replacement-Fuel-Canister-System	
Drive system	Step- and brushless electric drive, 48 V DC, Safety Extra Low Voltage	
Speed ranges / Speeds	4 speed ranges: range 1: 0 - 2.5 km/h ^(0 - 1.5 mph) ; range 2: 0 - 4 km/h ^(0 - 2.4 mph) ; range 3: 0 - 6 km/h ^(0 - 3.7 mph) ; range 4: 0 - 8.5 km/h ^(0 - 5.3 mph)	
Brake	Electromechanical Fail Safe Brake	
Slope capability	55° (143 %)	
Mower	High grass rotary mulcher	
Blade	2 blade carriers each with 4 swinging blades	
Mower drive	Belt drive with electromagnetic clutch	
Working width	112 cm ^(44 inch)	
Cutting height	50 - 185 mm ^(1.9 - 7.3 mph) , stepless adjustable	
Surface power	max. 5,000 m ² /h at 5 km/h ^(53,820 sq Ft / hr at 3.1 mph)	
Remote Control	Autec-Safety RC-System with 2.8" colour display	
Max. range	max. 300 m ^(984 Ft)	
Recommended working range	max. 100 m ^(328 Ft)	
Tilt sensor for the remote control	•	
Dimensions L x W x H	145 x 150 x 72 - 85.5 cm ^(57 x 59 x 28.3 - 33.6 inch)	
Ground pressure	0.18 kg/cm ² ^(0.62 lbs / sq in)	
Weight (with full fuel canisters)	approx. 653 kg ^(1439.6 lbs)	

REMOTE CONTROLLED HIGH GRASS ROTARY MULCHER

agria 9500

Choose exactly the right machine for your needs!



agria 9500-90	agria 9500-80 premium	agria 9500-70
9500 321	9500 541	9500 131
Kawasaki FS730V EFI 2-cylinder 4-stroke OHV petrol engine, 17.7 kW (24.0 HP)	Kawasaki FS 600V 2-cylinder 4 stroke petrol engine, 12.7 kW (17.3 HP)	Briggs & Stratton Vanguard 2-cylinder-4-stroke petrol engine, 11.9 kW (16.2 HP)
53.4 Nm at 2.400 rpm	40.4 Nm at 2.200 rpm	30.6 Nm at 2.400 rpm
1 x 10 litres (1 x 2.6 gal); Agria Replacement-Fuel-Canister-System	1 x 10 litres (1 x 2.6 gal); Agria Replacement-Fuel-Canister-System	1 x 5 litres (1 x 1.3 gal); Agria Replacement-Fuel-Canister-System
Step- and brushless electric drive, 48 V DC, Safety Extra Low Voltage	Step- and brushless electric drive, 48 V DC, Safety Extra Low Voltage	Step- and brushless electric drive, 48 V DC, Safety Extra Low Voltage
3 speed ranges: range 1: 0 - 2 km/h (0 - 1.2mph), range 2: 0 - 3.8 km/h (0 - 2.3 mph), range 3: 0 - 5.8 km/h (0 - 3.6 mph)	3 speed ranges: range 1: 0 - 2 km/h (0 - 1.2mph), range 2: 0 - 3.8 km/h (0 - 2.3 mph), range 3: 0 - 5.8 km/h (0 - 3.6 mph)	3 speed ranges: range 1: 0 - 2 km/h (0 - 1.2mph), range 2: 0 - 3.8 km/h (0 - 2.3 mph), range 3: 0 - 5.8 km/h (0 - 3.6 mph)
Electromechanical Fail Safe Brake	Electromechanical Fail Safe Brake	Electromechanical Fail Safe Brake
50° (119 %)	50° (119 %)	45° (100 %)
Compact mulcher	Compact mulcher	Compact mulcher
1 blade carrier with blade with 4 swinging blades	1 blade carrier with blade with 4 swinging blades	Mulching blade
Belt drive with electromagnetic clutch	Belt drive with electromagnetic clutch	Belt drive with electromagnetic clutch
90 cm (35.4 inch)	80 cm (31.5 inch)	70 cm (27.5 inch)
50 - 150 mm (2.0 - 5.9 inch), stepless adjustable	50 - 150 mm (2.0 - 5.9 inch), stepless adjustable	50 - 130 mm (2.0 - 5.1 inch), stepless adjustable
max. 3,500 m ² /h at 5 km/h (37,700 sq Ft / hr at 3.1 mph)	max. 3,000 m ² /h at 5 km/h (32,300 sq Ft / hr at 3.1 mph)	max. 2,500 m ² /h at 5 km/h (26,900 sq Ft / hr at 3.1 mph)
Autec-Safety RC-System with 2.8" display	Autec-Safety RC-System with 2.8" display	Autec-Safety RC-System with 2.8" display
max. 300 m (984 Ft)	max. 300 m (984 Ft)	max. 300 m (984 Ft)
max. 100 m (328 Ft)	max. 100 m (328 Ft)	max. 100 m (328 Ft)
•	•	•
125 x 126 x 68 - 79 cm (49.2 x 49.6 x 26.7 - 31.1 inch)	120 x 116 x 65 - 75 cm (47.2 x 45.7 x 25.6 - 29.5 inch)	117 x 107 x 65 - 78 cm (46 x 42 x 25.6 - 30.7 inch)
0.13 kg/cm ² (0.28 lbs / sp in)	0.08 kg/cm ² (0.17 lbs / sp in)	0.08 kg/cm ² (0.17 lbs / sp in)
approx. 387 kg (853.2 lbs)	approx. 372 kg (820.1 lbs)	approx. 344 kg (758.3 lbs)