


LIGHT PALLETS

LIGHT PALLET SERIES ECO

Intech light pallets stand out for their low unit weight. They impress, however, by offering a high load capacity and are an outstanding choice for export applications.

The light pallets can be stacked one inside the other (nestable) to save space – up to 2,356 pallets per truck are possible. When we attach click-runners the Intech light pallets are

even more stable and moreover well prepared for professional block stacking. Furthermore, the light pallets with click-runners are ready for utilization in modern high racks.

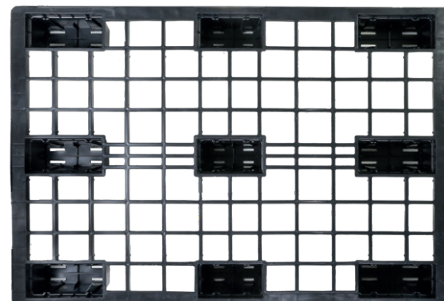

Light pallet IT800GD ECO

Item no.:	EP-GD-12080-10-ECO
External dimensions:	1,200 x 800 x 153 mm (L x W x H)
Load capacity:	1,200 kg dynamic / 2,500 kg static
Version:	9 feet (nestable), closed deck
Temperature range:	-40 °C to +70 °C
Unit weight:	5.7 kg
Material:	HD-PE regranulate
Colour:	black
Options:	with or without safety rims, click-runners available



Light pallet IT800 ECO

Item no.:	EP-OD-12080-10-ECO
External dimensions:	1,200 x 800 x 153 mm (L x W x H)
Load capacity:	1,000 kg dynamic / 2,500 kg static
Version:	9 feet (nestable), open deck
Temperature range:	-40 °C to +70 °C
Unit weight:	4.5 kg
Material:	HD-PE regranulate
Colour:	black or <u>grey</u>
Options:	with or without safety rims, click-runners available

