



PRODUCT
HIGHLIGHT

MINIBOX

A NEW DESIGN

Easy to order,
even easier to install!

isomasters
EUROPE'S N°1 IN COLD ROOM SOLUTIONS

isomasters Minibox

Order your compact, easy to install cold store online!

ADVANTAGES

- **Available online** (webshop.isomasters.com)
- **Very short delivery time**
- Quick installation - only requires half an hour!
- Excellent value for money
- Perfect for limited spaces
- Can be used in any sector
- For both refrigeration and freezing applications

COMPLETE PACKAGE

A complete package, including panels for walls, ceiling and floor (if requested), a door and all installation accessories.

A Minibox for freezing applications also includes floor ventilation profiles, a pressure relief port and an already installed door heater.

DIMENSIONS AND OPTIONS

The Minibox is available in various standard dimensions:

		Height: 2100/2400					
		1500	1800	2100	2400	2700	3000
Direction of rotation: L/R	1200	✓	✓	✓			
	1500	✓	✓	✓	✓	✓	
	1800		✓	✓	✓	✓	
	2100			✓	✓	✓	✓

In addition, you can choose between with or without multiplex flooring, type of door and cooling or freezing application:

	Refrigeration		Freezing
	with floor	without floor	with floor
Classical cold room door	✓	✓	✓
Self-closing cold room door	✓		✓




QUICKLY INSTALLED!

The isomasters locking systems on all sides of the Minibox panels ensure a very time-efficient installation. The locking system consists of a hook and a shaft that can be connected by means of a hexagonal wrench. This ensures an airtight connection between the cold room panels. In addition, the toothed side and the groove side of the panels fit together perfectly. This also contributes to achieving a thermal bridge free construction. In contrast to our Modular cold room panels, we already install the horizontal corner joints in the Minibox panels during the production process. This considerably shortens the assembly process. You can also use the same hexagonal wrench to disassemble the Minibox and reassemble it at another location. This makes it a very flexible solution!



TECHNICAL DETAILS

Thickness	80 mm
Height	2100 or 2400 mm
Application	<ul style="list-style-type: none"> • With or without flooring • Positive and negative temperature (up to -18°C) • Negative temperature only possible with flooring
Appearances	<ul style="list-style-type: none"> • Surface: smooth • Edges: tongue-and-groove connection
Panel Facing	<ul style="list-style-type: none"> • White lacquered, galvanized steel sheet, with removable protective film. <ul style="list-style-type: none"> - Thickness: 0,63 mm (total) - Coating: Polyester lacquer - 25 µ - CLEANSafe 25 - Colour: RAL 9010 (white) • Floor panel: <ul style="list-style-type: none"> - Finish: DuraFloor® consisting of compact density fibreboard (10mm) with abrasion resistant (AC4), anti-slip (R10) finish
Locking-Systems	<ul style="list-style-type: none"> • Material: premium PVC • Position: at 300 - 600 - 900 mm distance • Operation with a hexagonal M12 key
Insulation	<ul style="list-style-type: none"> • Rigid polyurethane foam
Door	<p>One hinged cold room door per Minibox. Clear opening: 700 x 1940 mmh (with floor) or 700 x 2020 mmh (without floor)</p> <ul style="list-style-type: none"> • Classical hinged cold room door: <ul style="list-style-type: none"> - Door leaf thickness: 100 mm - Direction of rotation: left- or right-opening - Hardware: - EURO 2015 door handle with keys and internal safety release - 2 hinges in RAL 7016 (anthracite grey) + RAL 9006 (silver) • Self-closing hinged cold room door: <ul style="list-style-type: none"> - Only possible in combination with flooring - Door leaf thickness: 80 mm - The door is reversible (left/right) by rotating the door frame - Hardware: - Aluminium handle centrally installed where the door leaf is - Stainless steel torsion hinge with adjustable closing force - Integrated reinforcement for installing a sliding door track. Sliding door track not included.

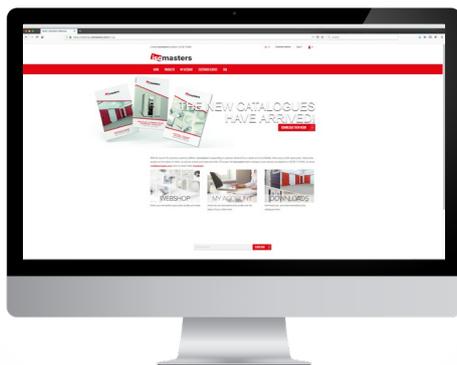

CONVINCED BY THE ADVANTAGES AND PERFORMANCE OF THE MINIBOX?

TAKE ADVANTAGE OF THE EXTREMELY SHORT DELIVERY TIMES
AND ORDER YOUR MINIBOX TODAY.

On our customer portal: webshop.isomasters.com
Through our internal sales staff: info@isomasters.com

isomasters

isomasters nv

Pontstraat 80 • Waregem zone 11B • B-8791 Beveren-Leie
T +32 (0)56 71 04 94 • F +32 (0)56 70 32 87
info@isomasters.com • www.isomasters.com

webshop.isomasters.com



PROUD DISTRIBUTOR OF

isocab
By Kingspan

PART OF THE KINGSPAN GROUP

Kingspan

Care has been taken to ensure that the content of this publication is accurate. However, **isomasters** does not accept responsibility for errors or information that is found to be misleading. Suggestions for, or descriptions of, the end use or application of products or methods of working are for information only and **isomasters** accepts no liability in respect thereof. We reserve the right to modify specifications.