

CONDENSATE PUMPS

Silence and innovation for absolute comfort



DISCOVER OUR NEW ELITE RANGE





FEW WORDS ABOUT SICCOM

SICCOM S.A.S was founded in 1979 and specialises in condensate removal pumps, level and proximity sensors, bimetal heat protection, and interference suppressors for car industry.

SICCOM's expertise means customers can benefit from a range of high added-value products that meet installers' requirements.

SICCOM technology is designed and implemented by its own engineering department, made up of a number of highly qualified engineers and technicians.

SICCOM constantly strives to innovate and now enjoys worldwide success in more than 50 countries.

As it has grown, it has opened factories in Madagascar, China and Bulgaria, and subsidiaries in Milan, Barcelona and New Delhi alongside its head office in the Paris area.

This international presence means it is able to supply customers regardless of any particular geopolitical situation.



Eco-design

SICCOM makes every effort to support its developments with major ecological improvements. From production to product recyclability, our design office strives to reduce the environmental impact of our products at every stage. The new ELITE range is proof of this, being the perfect combination of market expectations, environmentally-friendly production and easy recycling.

Certifications

All our sites have received ISO 9001 certification. Quality procedures encompass all of the company's services, ensuring optimal quality levels.



Factory (Madagascar)



Factory (China)



Factory (Bulgaria)



SICCOM products are available in more than 50 countries.

CONTENTS

	 Air conditioning	 Refrigeration	 Heating	Flowrate max	Discharge head max	Noise level	Page
ELITE RANGE							
mini FLOWATCH® DT15 NEW				15 l/h	10 m		7
FLOWATCH® SILENCE DT20				20 l/h	10 m		8
FLOWATCH® DESIGN MT20 NEW				20 l/h	10 m		9
FLOWATCH® MT20 Universal Pack NEW				20 l/h	10 m		10
FLOWATCH® SILENCE DESIGN DT20				20 l/h	10 m		11
FLOWITA EVO DT20				20 l/h	10 m		12
FLOWITA EVO DT36 NEW				36 l/h	10 m		13
PREMIUM RANGE							
mini FLOWATCH® 2				15 l/h	10 m		15
FLOWATCH® DESIGN				15 l/h	10 m		16
FLOWATCH® VISION				15 l/h	10 m		17
FLOWATCH® VISION DUO				19 l/h	10 m		18
FLOWATCH® TANK+ 1.2 / 2.5				800 l/h	5.6 m (50Hz) 6 m (60Hz)		19
SUNNY FLOWATCH® CLIM				15 l/h	10 m		20
SUNNY FLOWATCH® DUO				19 l/h	10 m		21
Centrifugal pump CP08				60 l/h	1,10 m		22
ECO RANGE							
ECO FLOWATCH®				13.2 l/h	10 m		24
ECO FLOWATCH® DESIGN				13.2 l/h	10 m		25
ECO LINE				13.2 l/h	10 m		26
mini FLOWATCH® 1 EVO				13.2 l/h	10 m		27
MAXI ECO FLOWATCH®				40 l/h	10 m		28
FLOWITA EVO				13.2 l/h	10 m		29
OTHER PRODUCTS							
Pump accessories							30
Level and proximity sensors							31

SICCOM

New range **ELITE**

Silence and innovation

SICCOM has developed an exclusive diaphragm pump that achieves an extremely low and perfectly stable noise level. No more disturbance, even in a bedroom!



FLOWATCH SILENCE DT20

The silence that conquered the market.



17 dBA

20 l/h

10 m

KEY FEATURES

- Ultra-quiet
- Quick connectors

NEW

mini FLOWATCH DT15

The most compact on the market, without compromise.



17 dBA

15 l/h

10 m

KEY FEATURES

- Compact in-line pump
- Ultra-quiet
- Quick connectors
- Mounting sleeves included

NEW

FLOWATCH DESIGN MT20

The quietest pump ever designed, in trunking version.

16 dBA

20 l/h **10 m**

KEY FEATURES

- Absolute silence: 16 dBA
- MT20 monoblock pump
- Fast installation
- Complete kit



FLOWATCH SILENCE DESIGN DT20

Installers' best-selling trunking kit.

16 dBA

20 l/h **10 m**

KEY FEATURES

- Ultra-quiet
- DT20 bi-block pump
- Fast installation
- Complete kit



NEW

FLOWATCH MT20 Universal Pack

The quietest pump in the world for replacing an existing monoblock pump.

16 dBA

20 l/h **10 m**

KEY FEATURES

- Absolute silence: 16 dBA
- Universal replacement
- Fast installation
- Removable reservoir



FLOWITA EVO DT20

The wall pump offering the best balance between silence, reliability and price.

18 dBA

20 l/h **10 m**

KEY FEATURES

- Very silent wall pump
- Discreet integration under the AC
- Installation in just a few minutes
- Available in 36 l/h version



Range **ELITE**

The ELITE range, excellence in condensate pumps.

Thanks to its exclusive diaphragm technology, it delivers superior performance and ultra-quiet operation.

Reliable, easy to install and designed for both installers and end users, the ELITE range guarantees a no-compromise experience.

Simply the best pumps on the market.



mini FLOWATCH® DT15

SICCOM

With its ultra-slim design, this new pump fits easily and discreetly into any tight space (air conditioner, trunking, etc.). Looking for a compact and silent in-line pump? Here is the best on the market! For air conditioners up to 10kW / 36 000BTU.


Ref: DE15PMCE700



ELITE NEW



NF EN ISO 3744 : 2012

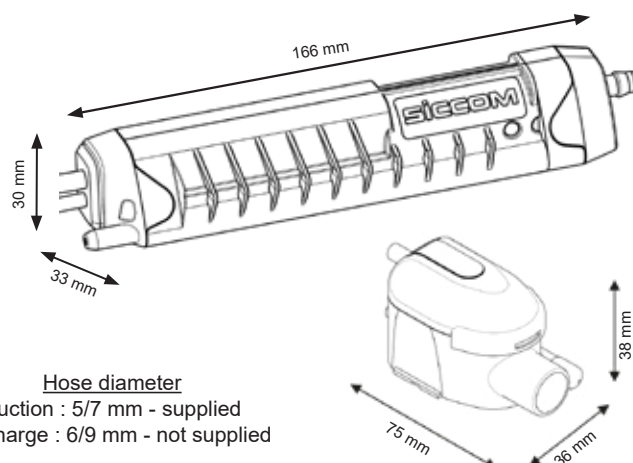

Mounting brackets included



Enable easy and secure mounting of the pump unit on any flat surface or SICCOM trunking (OptimalDuct).

SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	3 m
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	17 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Dimensions	166 x 33 x 30 mm / 75 x 36 x 38 mm
Certifications	CE

* The pump is able to run 100% of the time if necessary.

BENEFITS

Ultra slim pump
Only 33 x 30 mm in cross-section!
The most efficient and quietest space-saving solution on the market.

17 dBA

- UNIQUE ON THE MARKET -
Absolute silence, even at full capacity!
The pump remains perfectly silent, whatever the flowrate, from 0 to 15 l/h!

DT15 TECHNO

New technology DT15

The new smaller version of the successful SICCOM DT20 technology, just as effective as ever!



IP24 protection

Protected against water splashes.



New Plug & Play connectors

Make installation and maintenance easier and faster.

3W


Very low power consumption

Only 3W power consumption, during operation only!



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

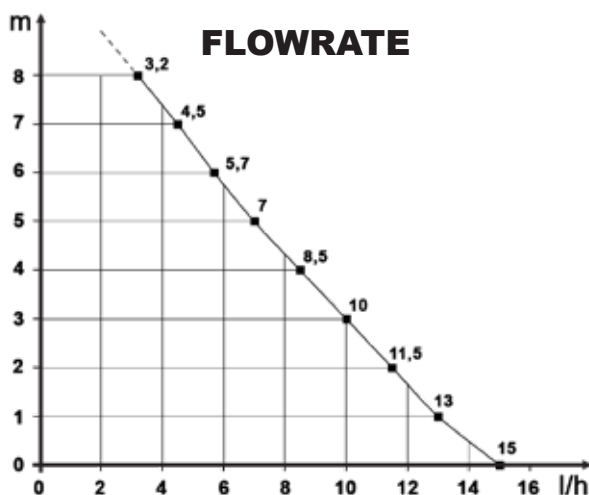

CONTENTS

Pump - Rubber pump mounts - Reservoir with air-vent tube - Power / alarm cable - Stop Siphoning - Reservoir stand - Double-sided adhesives - Inlet tube - Suction tube 1.8 m - 3 clamps

FLOWATCH® SILENCE DT20 **siccom**

The perfect combination of silence, performance, reliability and simplicity.
For air conditioners up to 20kW / 68 000BTU.
The new standard in condensate pumps!

Ref: DE20PMCD700





ELITE



SPECIFICATIONS


Flowrate max	20 l/h
Suction head max	3 m
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	17 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Dimensions	168 x 37 x 40 mm / 75 x 36 x 38 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

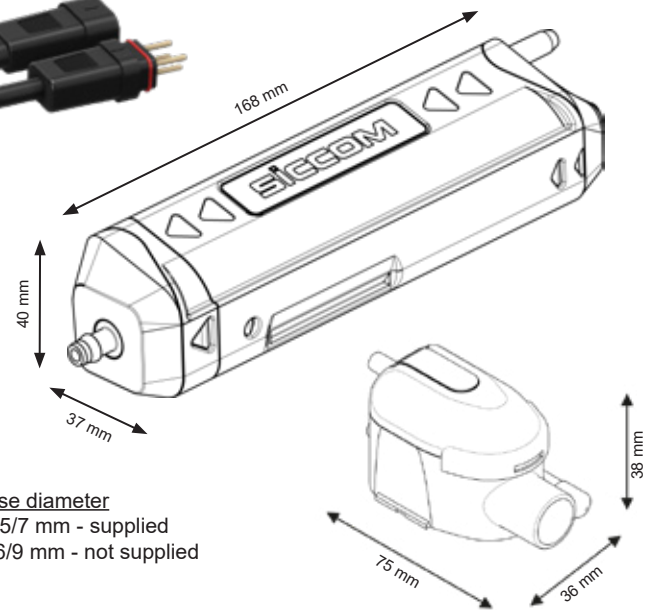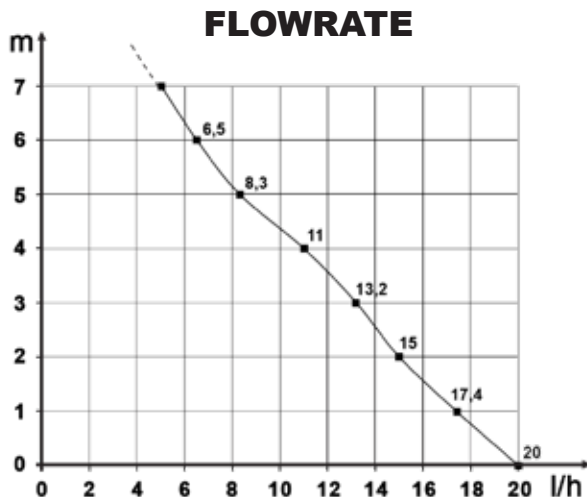

Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied

BENEFITS



- UNIQUE ON THE MARKET -

Absolute silence, even at full capacity!

The pump remains perfectly silent, whatever the flowrate, from 0 to 20 l/h!

DT20 TECHNO

New technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!



IP24 protection

Protected against water splashes.



Plug & Play connectors

Make installation and maintenance easier and faster.

3W

Very low power consumption

Only 3W power consumption, during operation only!



Hanging hook

This astucious hook allows to fix or hang the pump wherever you want (duct, false ceiling, inside de unit...).



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Stop Siphoning - Reservoir stand - Double-sided adhesives - Inlet tube - Suction tube 1.8 m - 3 clamps

FLOWATCH® SILENCE DESIGN DT20 **siccom**

The quietest trunking pump in the world!

A complete kit, with a quality trunking and all the accessories needed for installation! For air conditioners up to 20kW / 68 000BTU.


Ref: DE20PMCE450



ELITE



Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied

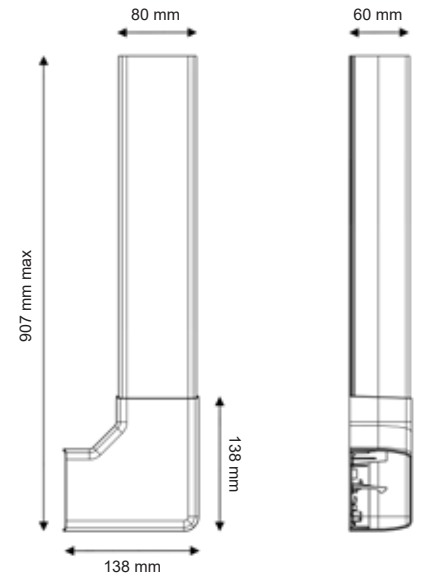


SPECIFICATIONS

Flowrate max	20 l/h
Suction head max	3 m
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

BENEFITS



- UNIQUE ON THE MARKET -

**Absolute silence,
even at full capacity!**

The pump remains perfectly silent,
whatever the flowrate, from 0 to 20 l/h!



FLOWATCH® SILENCE DT20 included

Quite simply, the new standard on the market.

DT20 TECHNO

New Technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!



Custom-made pump casing

For easy installation and perfect integration into the trunking.




Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Plug & Play connectors

Make installation and maintenance easier.

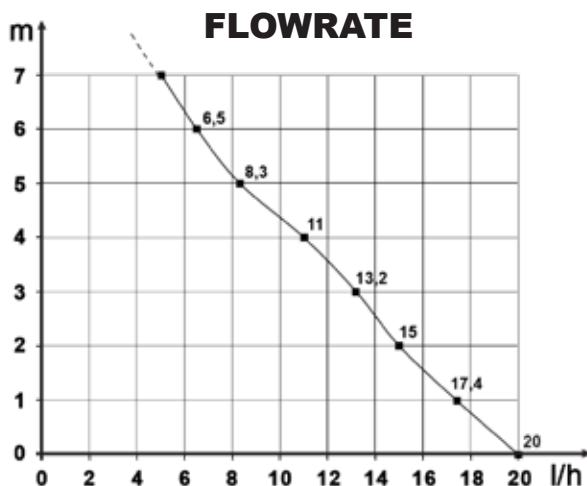

CONTENTS

Trunking with elbow - Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Inlet tube - Suction tube 0.25m - Screws and rawlplugs

www.siccom.com



FLOWATCH® DESIGN MT20

SICCOM

The monobloc trunking pump that installers were waiting for!
A complete kit, with high-quality trunking and all the accessories
needed for installation! For air conditioners up to 20kW / 68 000 BTU.

Ref: DE20PMCF750




ELITE

NEW



16 dBA

Hose diameter
Discharge : 6/9 mm - not supplied

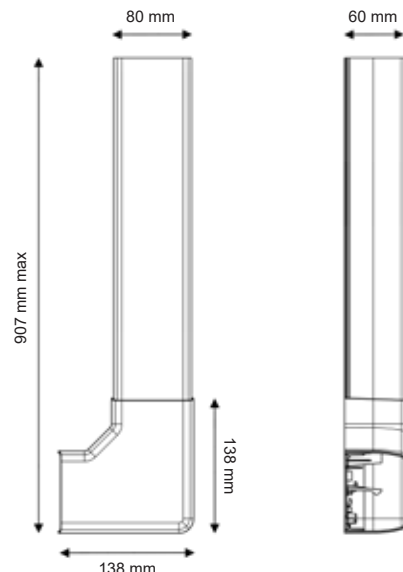


SPECIFICATIONS

Flowrate max	20 l/h
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE

* The pump is able to run 100% of the time if necessary.

BENEFITS



- UNIQUE ON THE MARKET -

**Absolute silence,
even at full capacity!**

The pump remains perfectly silent,
whatever the flowrate, from 0 to 20 l/h!



New FLOWATCH MT20

SICCOM 's expertise in a reliable, quiet and
easy-to-install monobloc pump...
Simply the best on the market!

MT20 TECHNO

Technology MT20

All the benefits of a diaphragm pump in a
compact monobloc version:
low power consumption, unrivalled quietness
and exceptional reliability!

3W

Very low power consumption

Only 3W power consumption, during
operation only!




Stop siphoning included

Allows to avoid all risk of negative discharge and
to secure the pump functioning over time.



New Plug & Play connectors

Make installation and maintenance easier
and faster.

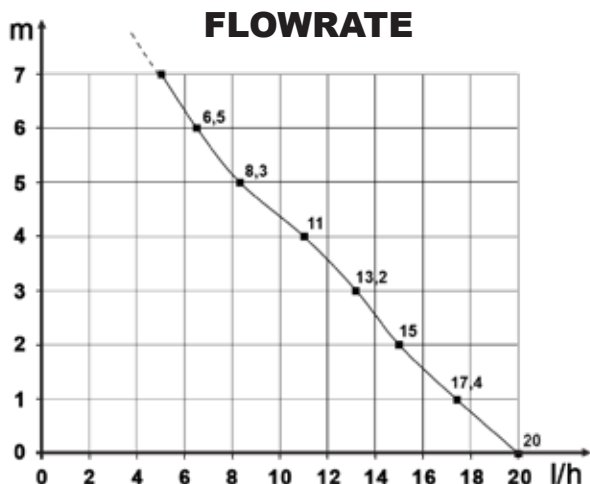

CONTENTS



Duct with elbow - Finishing gasket - Finishing ceiling
plate - Pump - Stop Siphoning - Power / alarm cable -
Inlet tube - Screws and rawlplugs

A reliable and quiet monobloc pump, for replacing SICCOM or competitor models (in trunking) in record time!

For air conditioners up to 20kW / 68 000 BTU.

Ref: DE20PMCF700



ELITE **NEW**



SPECIFICATIONS


Flowrate max	20 l/h
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Dimensions (L x D x H)	123 x 130 x 46 mm
Certifications	CE

* The pump is able to run 100% of the time if necessary.


Universal replacement pack

Need to replace an existing pump (SICCOM or competitor brand)?

No problem, it will fit right in, without any accessories or modifications!

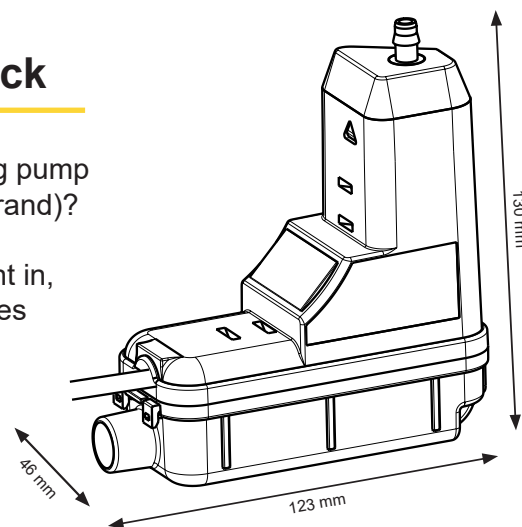

BENEFITS



- UNIQUE ON THE MARKET -

Absolute silence, even at full capacity!

The pump remains perfectly silent, whatever the flowrate, from 0 to 20 l/h!



Universal compatibility

Optimal compatibility with existing trunking elbows on the market.

MT20 TECHNO

Technology MT20

All the benefits of a diaphragm pump in a compact monobloc version: low power consumption, unrivalled quietness and exceptional reliability!

3W

Very low power consumption

Only 3W power consumption, during operation only!



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.




New Plug & Play connectors

Make installation and maintenance easier and faster.



CONTENTS

Pump - Pump bracket - Stop Siphoning - Power / alarm cable - Inlet tube - Clamps

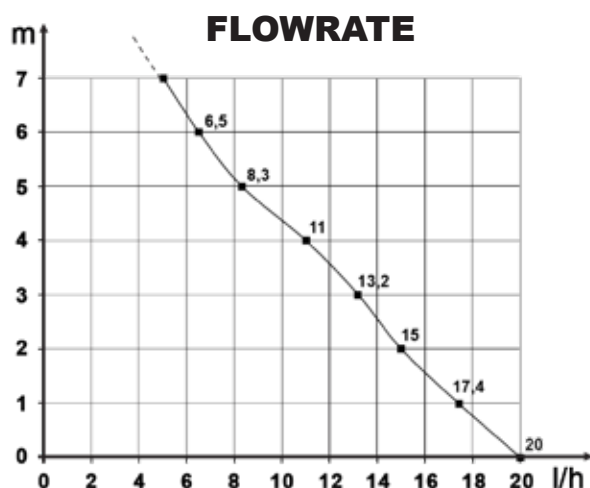

FLOWITA EVO DT20


siccom

A very silent, efficient, reliable and easy-to-install wall-mounted pump.
For air conditioners up to 20kW / 68 000BTU.
The new standard in condensate pumps!

Ref: DE20PMCE400



ELITE

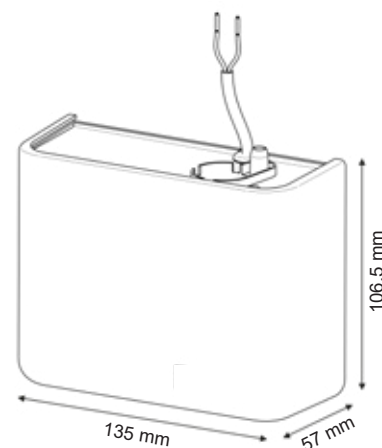

Hose diameter
Discharge : 6/9 mm - not supplied




SPECIFICATIONS

Flowrate max	20 l/h
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	No alarm
Noise level	18 dBA
Protection rating	IP24
Operating cycle*	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

BENEFITS



The FLOWITA EVO DT20 can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!



Extreme silence, even at max flowrate

The most silent wall-mounted pump on the market, for an unrivalled user experience.

**DT20
TECHNO**

New technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

3W

Very low power consumption

Only 3W power consumption, during operation only!




Quick installation

The FLOWITA EVO DT20 can be installed easily and quickly underneath any air conditioner.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.




Removable metal filter

NEW

The reservoir has an easily removable metal filter for quick cleaning.

FLOWRATE

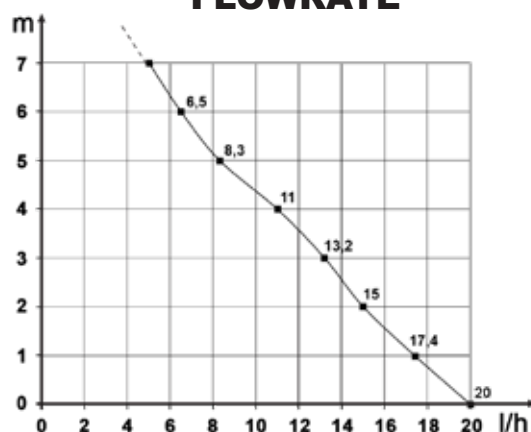

CONTENTS

Pump - Stop Siphoning -
Screws and rawlplugs



FLOWITA EVO DT36

SICCOM


A new-technology wall-mounted pump that combines power and silence.
Suitable for air conditioners up to 40kW / 136 000 BTU.

Ref: DE36PMCE440



ELITE

NEW

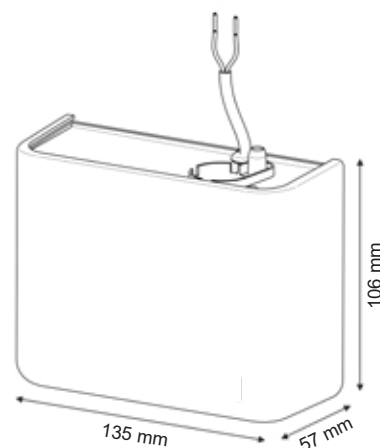


Hose diameter

Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	36 l/h
Discharge head	10 m
Electrical power	3W
Voltage	100-240V 50/60Hz
Alarm	No alarm
Noise level	
Protection rating	IP24
Operating cycle*	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm
Certifications	CE

* The pump is able to run 100% of the time if necessary.

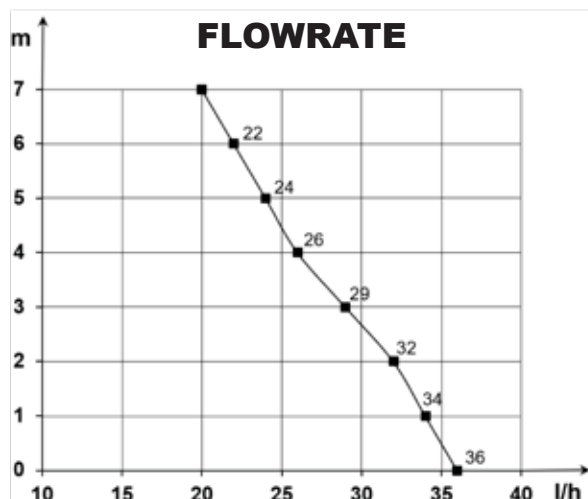


www.siccom.com

BENEFITS

The FLOWITA DT36 can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!



Low noise level

A «power / noise level» ratio unique on the market.

DT36 TECHNO

New technology

Ultra-low power consumption, high performance, exceptional reliability... Tested and approved!

3W

Very low power consumption

Only 3W power consumption, during operation only!




Quick installation

The FLOWITA DT36 can be installed easily and quickly underneath any air conditioner.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Removable metal filter

The reservoir has an easily removable metal filter for quick cleaning.

NEW

CONTENTS

Pump - Stop Siphoning -
Screws and rawlplugs



Range **PREMIUM**

The PREMIUM range combines performance and reliability for everyday use.

Designed to meet the requirements of most residential and commercial installations, these pumps offer quiet operation, high reliability and an integrated alarm.

Easy to install and robust, they represent the best balance between performance and cost efficiency.



mini FLOWWATCH® 2



siccom

Mini solenoid pump reliable and silent for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05LC4400



PREMIUM

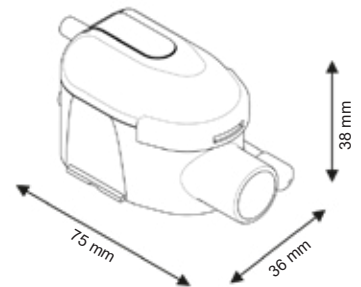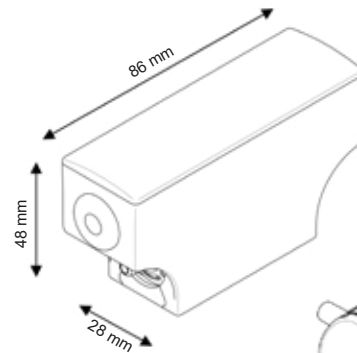


Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm
Certifications	CE, EAC, CMIM

* The pump is able to run 100% of the time if necessary.

FLOWRATE

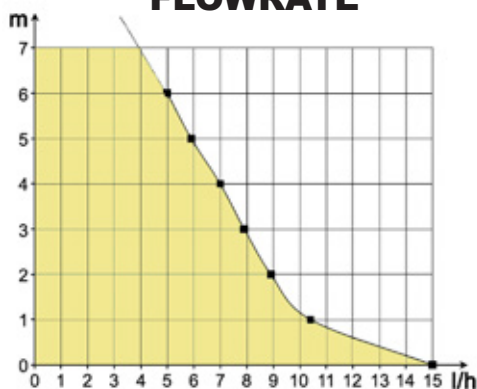

Recommended accessory



Easy Fix

Facilitates installation and reduces vibrations from the pump block.

Ref: GC1KFX2010

BENEFITS



Silent

Silent pump (20.2 dBA), suitable for an installation in any room.



IP64 protection

Protected against water splashes and dust.



Plug & Play connectors

Make installation and maintenance easier.



Clear reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



Metal pump outlets

High solidity and reliability.



Accessories included

All accessories required for installation are included in the box.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

CONTENTS



Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Stop Siphoning - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

FLOWATCH® DESIGN

siccom

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36 000BTU.


Ref: DE05LCF300



PREMIUM



Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied

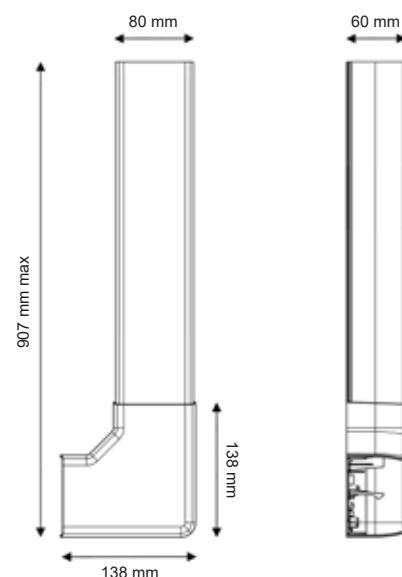


SPECIFICATIONS

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

FLOWRATE

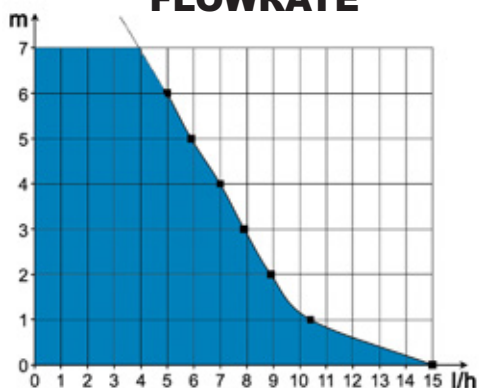

Recommended accessory



Connection extension kit

Allows the pump to be moved into a false ceiling, thus reducing the noise level.

Ref: GC1KCTC710

CONTENTS

Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Vibrations - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs



BENEFITS



mini FLOWATCH® 2 included

It assures a high reliability and an easy maintenance.



Silent

Silent pump (20.2 dBA), suitable for an installation in any room.



Stop Vibrations premounted

Eliminates vibrations transmitted to the discharge pipe, thus reducing the noise level of the system!



Custom-made pump case

For easy installation, reduced noise level and perfect integration into the trunking.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Pump relocation option

Thanks to the **Connection extension kit** (sold separately), the pump unit can be relocated to help reduce noise levels.

FLOWATCH® VISION


siccom

The only monoblock wall pump of the market, installed horizontally or vertically, for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05LCB900



PREMIUM

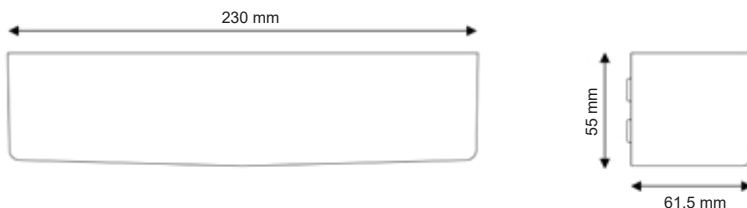

Hose diameter
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.4 m
Dimensions	230 x 61.5 x 55 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

BENEFITS



4 possible installations

Exclusive technology - Can be installed horizontally or vertically, on the right or on the left of the air conditioner.



Easy maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.



Silent

Silent pump, suitable for an installation in any room.



Record size


Thanks to its small size, the FLOWATCH® VISION is the most discreet and aesthetic monoblock wall pump of the market.



Reservoir with removing filter

Prevents dust and particles to damage the pump. Easy to clean.

FLOWRATE

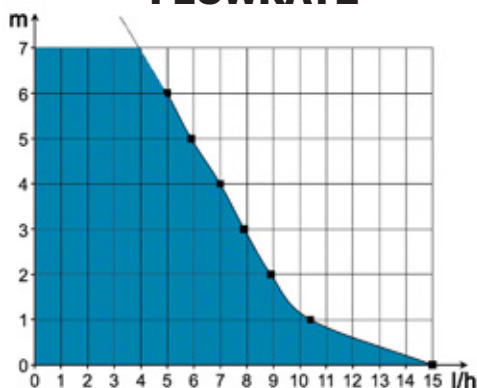

CONTENTS

Pump - Reservoir for horizontal installation -
Reservoir for vertical installation - Inlet tube -
Screws and rawlplugs - 1 clamp

FLOWATCH® VISION DUO

SICCOM

Monoblock wall pump (solenoid), silent and innovative, for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.


Ref: DE05LCC510



PREMIUM



pH > 2.5

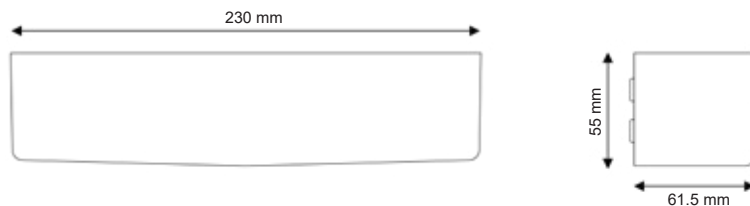


Hose diameter
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	19 l/h
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.4 m
Dimensions	230 x 61.5 x 55 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

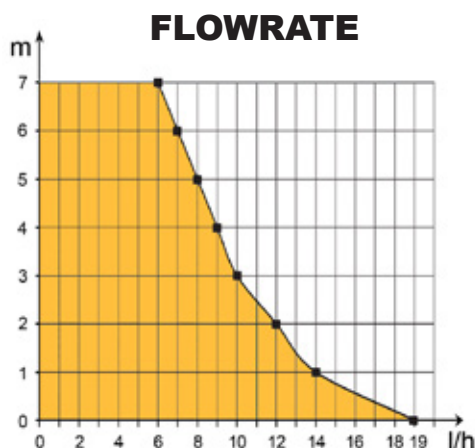

BENEFITS



4 possible positions

Exclusive technology - Can be installed horizontally or vertically, on the right or on the left of the boiler.



Silent

Silent pump, suitable for an installation in any room.



Very easy maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.



Record size

Thanks to its small size, the FLOWATCH® VISION DUO is the most discreet and aesthetic monoblock wall pump of the market.



Reservoir with removable filter

Prevent dust and particles to damage the pump. Easy to clean.



CONTENTS

Pump - Reservoir for horizontal installation
- Reservoir for vertical installation - Inlet tube - Screws and rawplugs - 1 clamp

FLOWATCH TANK+ 1.2 / 2.5

siccom

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref TANK+ 1.2 50Hz: DE12QCC610
Ref TANK+ 2.5 50Hz: DE25QCC620
Ref TANK+ 2.5 60Hz: DE25QCD140



PREMIUM



pH > 2.5




SPECIFICATIONS

	50Hz version	60Hz version
Flowrate max	800 l/h	800 l/h
Discharge head max	5.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Condensates max temp.	60°C	60°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC	NO-NC
Noise level		
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Cable lenght	1.5 m	1.5 m
Dimensions TANK+ 1.2	280 x 130 x 129 mm	/
Dimensions TANK+ 2.5	280 x 130 x 159 mm	
Certifications	CE, EAC	CE

* The pump is able to run 30% of the time if necessary.

FLOWRATE

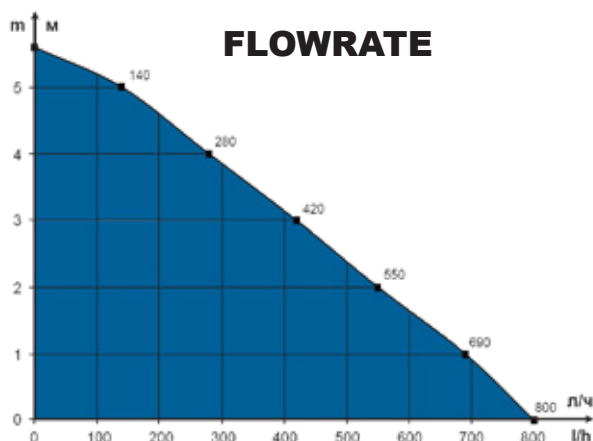

BENEFITS



High efficiency

Flowrate max: 800 l/h

Discharge head max: 5.6 m (50Hz) - 6 m (60Hz)



IP24 protection

The pump is protected against water splashes.



Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



High capacity tank

Thanks to its 2.5 l tank, the FLOWATCH TANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



Compact tank pump

With only 129 mm height, the FLOWATCH TANK+ 1.2 fits easily in any space.



Reversible tank

Turning the tank allows to fit in any configuration.



CONTENTS

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawplugs - PVC clear tube 6m (only in 60Hz version)

SUNNY FLOWWATCH® CLIM



siccom

Mini tank pump (solenoid) for the condensate removal of air conditioners
up to 10kW / 36 000BTU.

Ref: DE05RCC060



PREMIUM

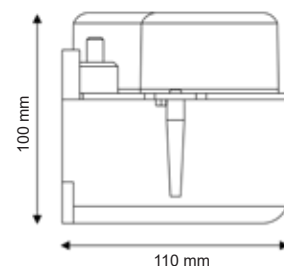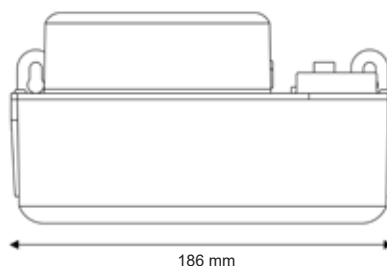


186 mm

100 mm

110 mm

Hose diameter
Discharge : 6/9 mm - not supplied

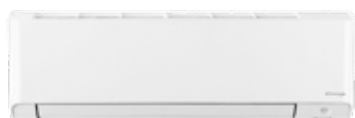

SPECIFICATIONS

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.5 m / 1.3 m
Dimensions	186 x 110 x 100 mm
Certifications	CE, EAC


* The pump is able to run 100% of the time if necessary.

BENEFITS



Silent

Silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWWATCH® CLIM offers the best tank capacity/pump size of the market.



IPX4 protection

Protected against water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets


Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

FLOWRATE

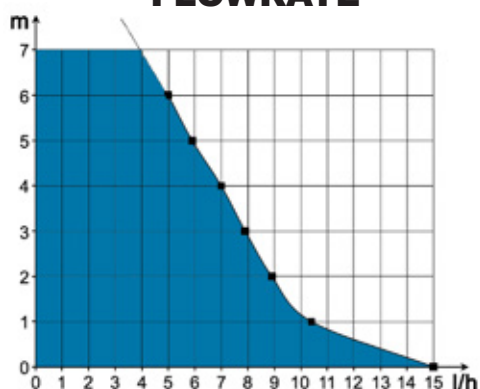

CONTENTS

Pump - Inlet tube - Screws and rawplugs

SUNNY FLOWWATCH® DUO



SICCOM

Mini tank pump (solenoid) for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05NCC090



PREMIUM

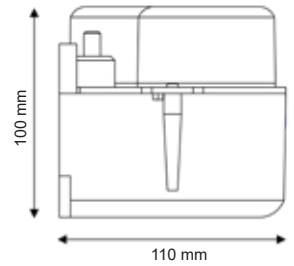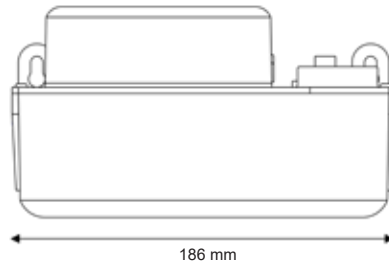

186 mm

110 mm

Hose diameter

Discharge : 6/9 mm - not supplied

pH > 2.5



SPECIFICATIONS

Flowrate max	19 l/h
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.5 / 1.3 m
Dimensions	186 x 110 x 100 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

BENEFITS



Silent

Silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWWATCH® DUO offers the best tank capacity/pump size of the market.



IPX4 protection

Protected against water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets


Thanks to its mounting brackets (and screws and rawlplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

FLOWRATE

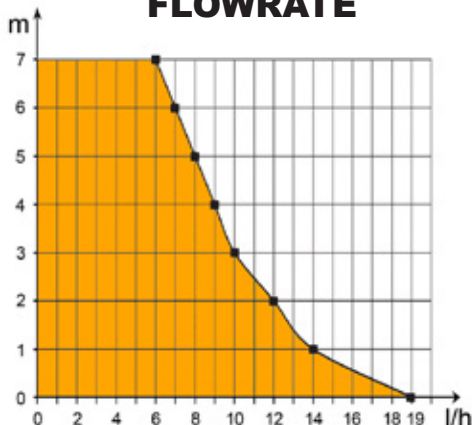

CONTENTS

Pump - Inlet tube - Screws and rawlplugs

Centrifugal pump CP08


Universal centrifugal pump dedicated to split cassettes.

SICCOM

Ref: CP08SC6641



PREMIUM

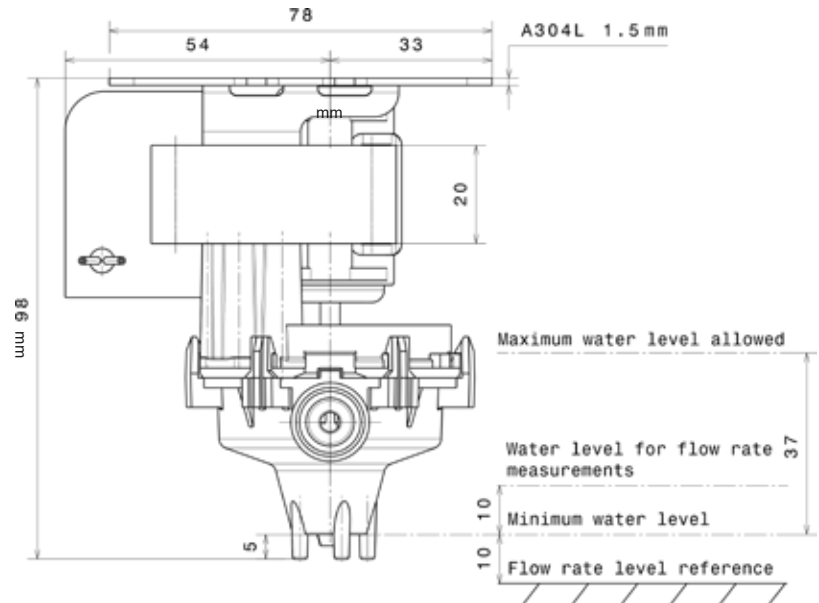


SPECIFICATIONS


Flowrate max	60 l/h
Discharge head max	110 cm
Electrical power	8W
Voltage	220-240V 50/60Hz
Noise level	
Protection rating	IP54
Temperature rise	66K
Operating cycle**	100%
Outlet tube	Ø 14 mm
Dimensions	87 x 75 x 98 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

FLOWRATE

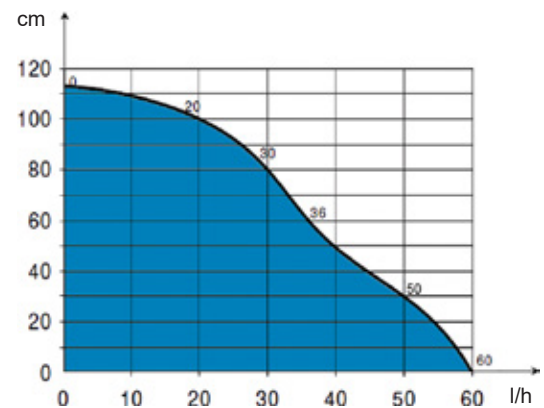

BENEFIT

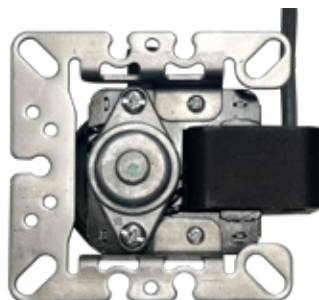

Universal plate

The CP08 mounting plate has been designed to fit the majority of cassette air conditioners on the market.

It can therefore easily replace another model of centrifugal pump at a cheaper price!

Range **ECO**

The SICCOM ECO range focuses on the essentials,
without compromising on reliability.

Simple, robust and easy to install, these pumps offer excellent value
for money for standard installations.

Designed for everyday efficiency, they meet the needs of professionals
looking for a cost-effective solution.



ECO FLOWATCH®


SICCOM

Mini solenoid pump simple and economic for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05LCC190



ECO

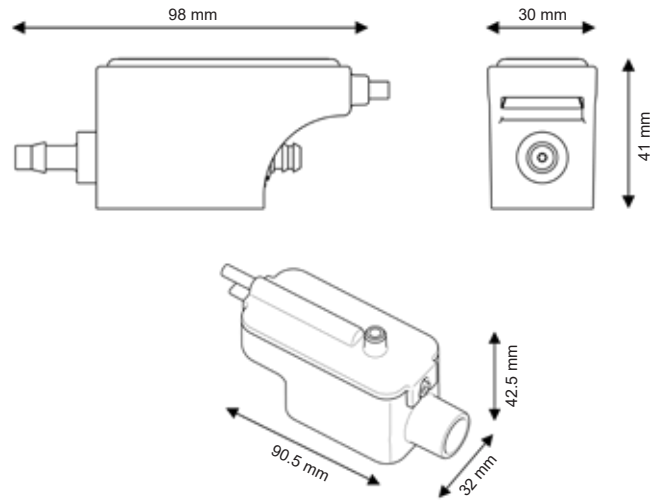

Hose diameter

Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	No alarm
Noise level	
Protection rating	IP20
Thermal protection	Yes
Operating cycle**	100%
Power cable	1.5 m
Dimensions	98 x 30 x 41 mm / 90 x 32 x 42 mm
Certifications	CE, EAC

* Alarm option available on request.

** The pump is able to run 100% of the time if necessary.

BENEFITS



WATERPROOF removable reservoir

The reservoir, which can be removed for easy maintenance, now has a waterproof seal!



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included


All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.

FLOWRATE

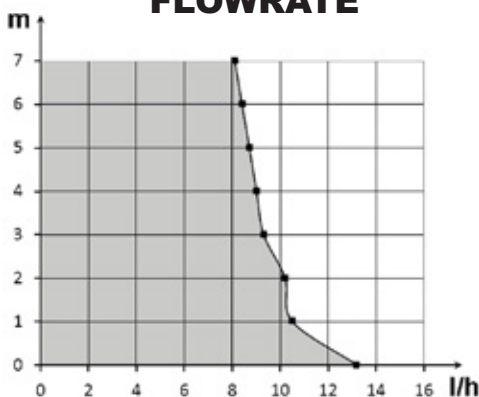

CONTENTS

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps





Mini in-line pump (solenoid), ultra compact and easy to install, for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05SCC600



ECO

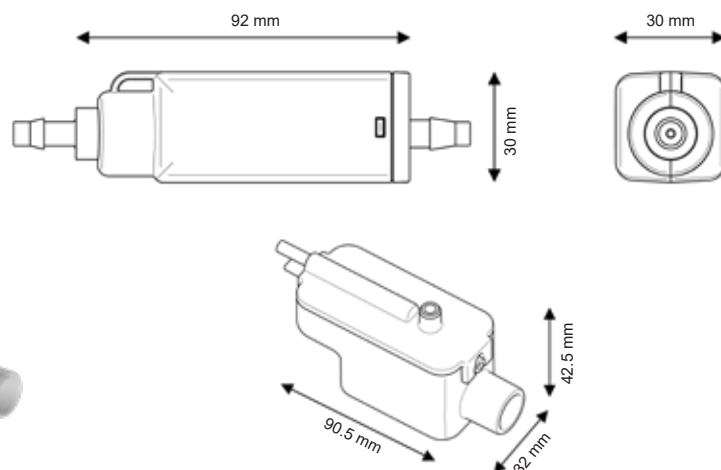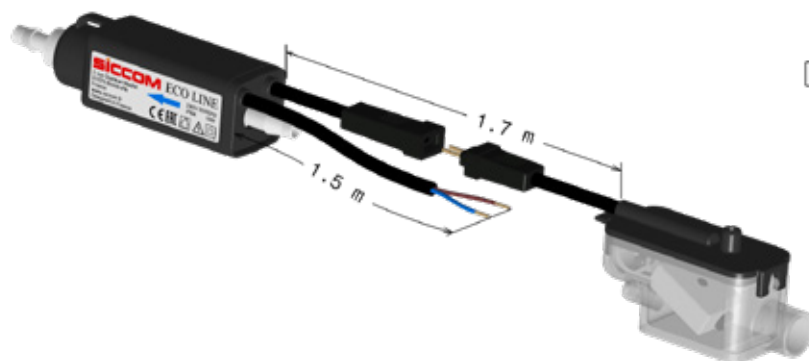

Hose diameter
Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	No alarm
Noise level	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power cable	1.5 m
Dimensions	92 x 30 x 30 mm / 90 x 32 x 42 mm
Certifications	CE, EAC

* Alarm option available on request.

** The pump is able to run 100% of the time if necessary.

FLOWRATE

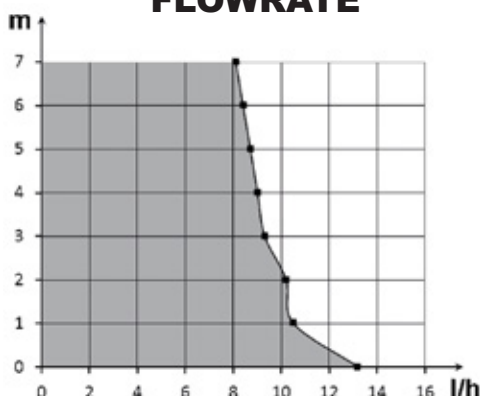

BENEFITS

ULTRA COMPACT pump

The most compact pump of the market!
Easy installation in a duct or inside the air conditioner.



IP64 protection

Protected against water splashes and dust.



Plug & Play connectors

Make installation and maintenance easier.



WATERPROOF removable reservoir

The reservoir, which can be removed for easy maintenance, now has a waterproof seal!



Hanging hook

This astucious hook allows to fix or hang the pump wherever you want (duct, false ceiling, inside de unit...).



Accessories included

All necessary accessories are included in the box.



CONTENTS

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

mini FLOWWATCH® 1 EVO


SICCOM

Economical mini solenoid pump, with alarm, for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05LCD600



ECO

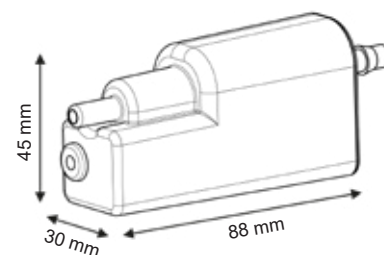

Hose diameter

Suction : 5/7 mm - supplied


Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level	
Protection rating	IP24
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.5 m
Dimensions	88 x 30 x 45 / 75 x 36 x 38 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

FLOWRATE

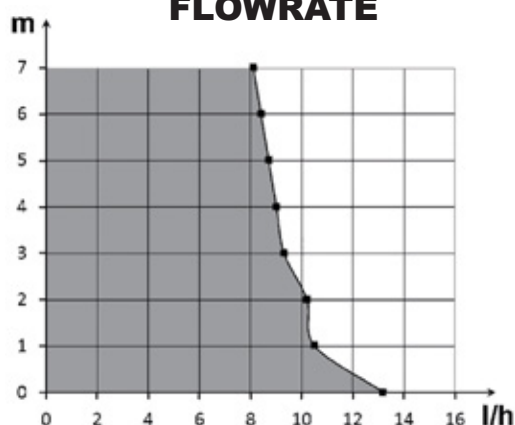

BENEFITS



Plug & Play connectors

Make installation and maintenance easier.



Clear reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



Removable integrated filter

The reservoir has a metal filter that can be easily removed for quick cleaning.



Alarm function

The NC alarm on the mini FLOWWATCH® 1 EVO allows to cut off the air conditioner power supply in the event of condensate overflow.



IP24 protection

Protected against water splashes.



Accessories included

Necessary accessories are supplied in the box.



CONTENTS

Pump - Reservoir with air-vent tube
- Double-side adhesive - Inlet tube -
Suction tube 1.5m - 3 clamps

MAXI ECO FLOWATCH®


SICCOM

Maxi solenoid pump, compact and powerful, for the condensate removal of air conditioners up to 30kW / 100 000BTU.

Ref: DE40LCC300



ECO

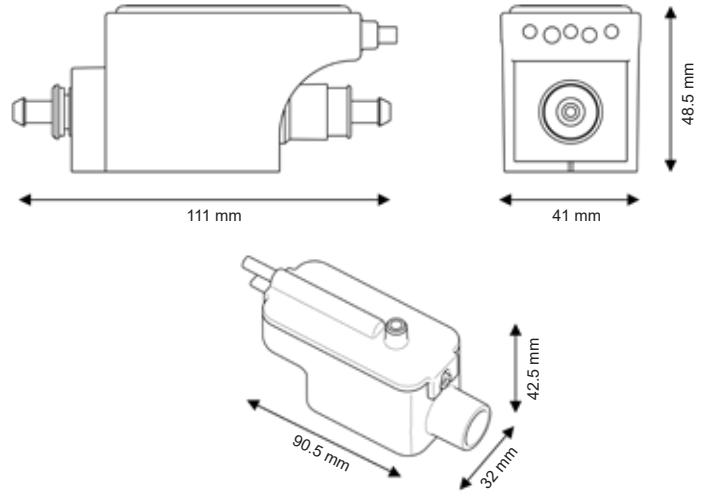

Hose diameter

Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	40 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	16W
Voltage	220-240V 50/60Hz
Alarm*	No alarm
Noise level	
Protection rating	IP20
Thermal protection	Yes
Operating cycle**	100%
Power cable	1.5 m
Dimensions	111 x 41 x 48 mm / 90 x 32 x 42 mm
Certifications	CE, EAC

* Alarm option available on request.

** The pump is able to run 100% of the time if necessary.

FLOWRATE

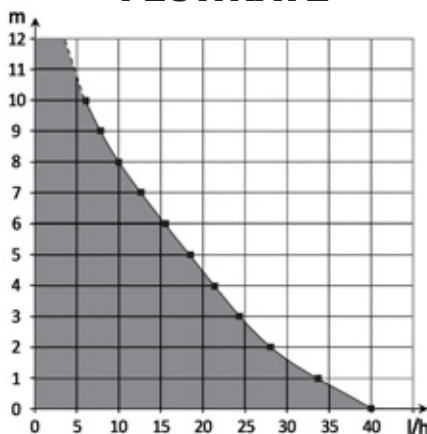

BENEFITS



High efficiency

Flowrate 40 l/h
Discharge head 10 m



Silent

The only pump of the world to offer such a flowrate with such a low noise.



WATERPROOF removable reservoir

The reservoir, which can be removed for easy maintenance, now has a waterproof seal!



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included

All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.



CONTENTS

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

ECO FLOWATCH® DESIGN



SICCOM

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36 000BTU.

Ref: DE05LCD320



ECO

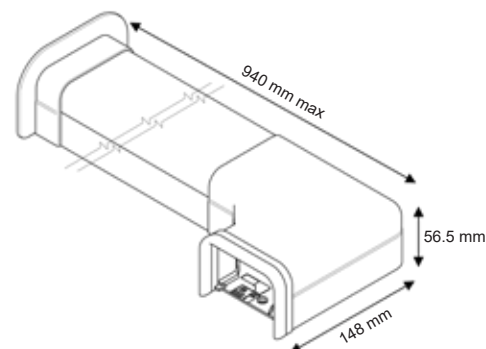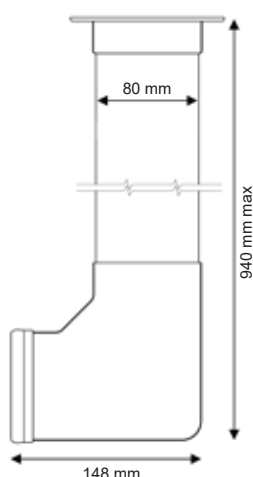

Hose diameter

Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied




SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	No alarm
Noise level	
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable	1.5 m
Trunking dimensions	80 x 55 x 800 m
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

FLOWRATE

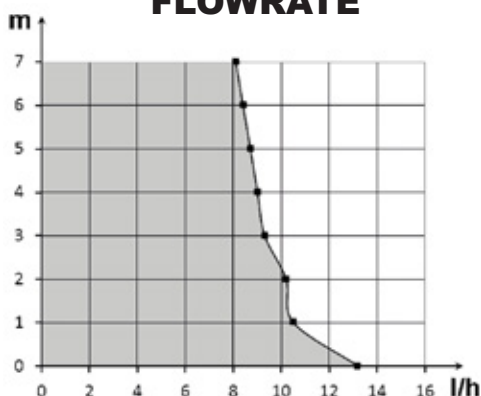

BENEFITS



Possibility to move the pump away

Thanks to its 1.5 m cable, the pump unit can be moved away to reduce the noise level and facilitate installation.



WATERPROOF removable reservoir

The reservoir, which can be removed for easy maintenance, now has a waterproof seal!



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included

All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.



Nice design

Thanks to its shape and its finishing accessories (included), the ECO FLOWATCH® DESIGN offers great aesthetics qualities.

CONTENTS



Duct with elbow - Finishing gasket - Finishing ceiling plate - Pump ECO FLOWATCH - Reservoir - Inlet tube - Double-side adhesive - Clamps

FLOWITA EVO


siccom

Wall-mounted monobloc pump, dismountable, for the condensate removal from air conditioners up to 10kW / 36 000BTU.

Ref: DE05LCC440



ECO

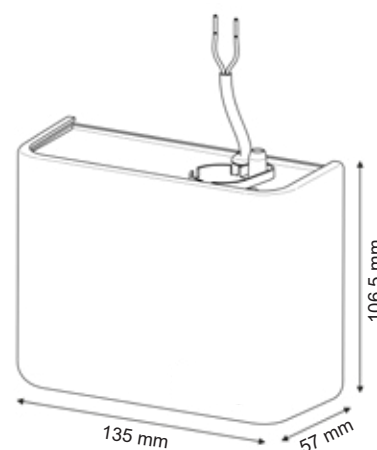

Hose diameter


Discharge : 6/9 mm - not supplied



SPECIFICATIONS

Flowrate max	13.2 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	No alarm
Noise level	
Protection rating	IP24
Thermal protection	Yes
Operating cycle*	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm
Certifications	CE, EAC

* The pump is able to run 100% of the time if necessary.

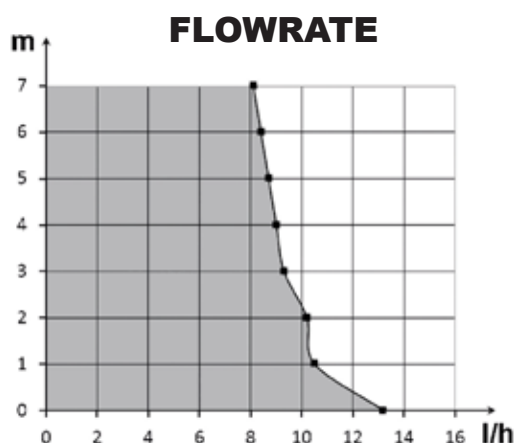



BENEFITS

Dismountable

The FLOWITA EVO can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!

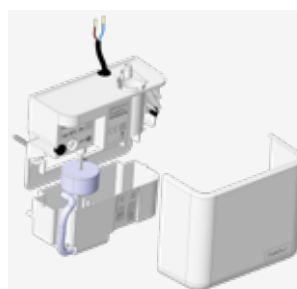

170ml reservoir

Its large reservoir allows the pump to operate optimally: larger and less frequent pumping cycles.



Silent

One of the most discreet wall-mounted pump on the market!



Quick installation

The FLOWITA EVO can be installed easily and quickly underneath any air conditioner.



IP24 protection

Protected against water splashes.

CONTENTS

Pump - Screws and rawlplugs



Pump accessories


Discover the range of accessories for SICCOM pumps, allowing easy installation and maintenance.



Connection extension kit
(extension cable 2m + suction tube 2m)
Ref: GC1KCTC710

This kit, coupled with a FLOWATCH® DESIGN, allows to move the pump in a false ceiling, and so:

- **REDUCE THE NOISE LEVEL**
- **FREED UP SPACE IN THE DUCT**

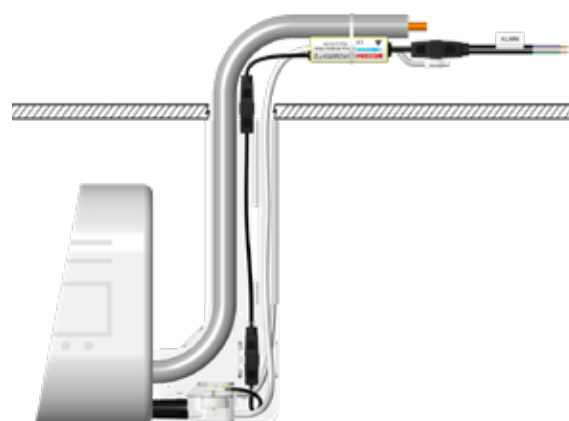

A kit to facilitate the installation of mini FLOWATCH® 2

Easy Fix
Ref: GC1KFX2010



The Stop Siphoning prevents the phenomenon of negative discharge on any installation.

Stop Siphoning
Ref: GC092A1001 (bag of 10)
GC092A1002 (1 piece)




Replacement reservoir for FLOWATCH® DESIGN

Short cable reservoir + air vent tube
Ref: GCDS3BTF4180



Replacement reservoir for mini FLOWATCH® 2

Long cable reservoir + air vent tube
Ref: GCDS3BTF4650

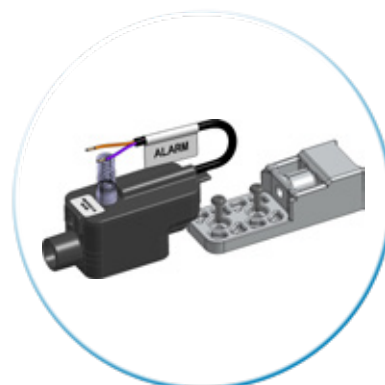

ECO pump alarm kit
Ref: DS1HTCC110



Bending tube Øint. 15mm
Ref: GC025D1017



Inlet adapter
FLOWATCH® TANK+ 1.2 / 2.5
Ref: GC078H2008



Inlet adapter
SUNNY FLOWATCH®
Ref: GC078H2007

Sensors

SICCOM also manufactures level and proximity sensors. Discover a part of our range below, and do not hesitate to contact us for further information.

Vertical sensors



DG series
Standard



DP series
Compact



DK series



DY series
Detection by microswitches

Horizontal sensors



DHN series
Threaded fixing



DHG series
Seal compression fixing




DHM series
Nut fixing

Specific sensors



DC series
Multi-level
resistive rod



DB series
Suction cane with
level detector



DD series
Resistive probe



DP series
Proximity sensors



OEM series
On-demand products



Find more informations
on our website

Sensors for all your applications



and the medical, food, hydrocarbon, transportation, automotive industries...



CONDENSATE PUMPS

SICCOM is established all across the world.
As an international manufacturer, we are committed to product quality and reliability.

Listening, communication and service are the three key values for our customer approach.

We will be delighted to provide further information, so please
CONTACT US.



France

Tel.: +33 6 83 82 46 02
Email: ychaves@siccom.fr

SICCOM France – Headquarter International customer service

2, rue Gustave Madiot
ZI Les Bordes
91070 Bondoufle
FRANCE

Tel.: +33 1 60 86 81 48
Email: commercial@siccom.fr

Northern America

Tel.: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Italy, Switzerland & Central Europe

Tel.: +39 02 96 36 21 40
Email: cconsales@siccom.fr

India

Tel.: +91 99 9900 3240
Email: djagga@siccom.fr

Spain, Portugal & Latin America

Tel.: +34 622 487 110
Email: tducasse@siccom.fr

Northern & Eastern Europe

Tel.: +33 6 83 82 46 00
Email: pgvassort@siccom.fr

Asia

Tel.: +33 6 43 31 19 27
Email: jlrendu@siccom.fr

Western Europe

Tel.: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Africa & Middle East

Tel.: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Oceania

Tel.: +33 6 83 82 46 00
Email: pgvassort@siccom.fr