
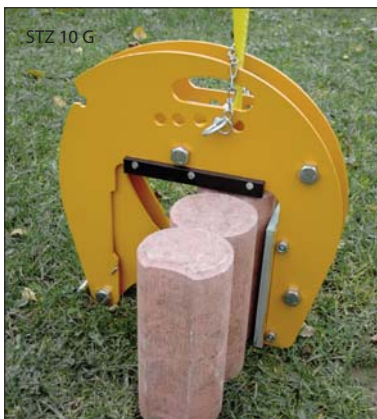


CLAMP FOR UPRIGHT SLABS

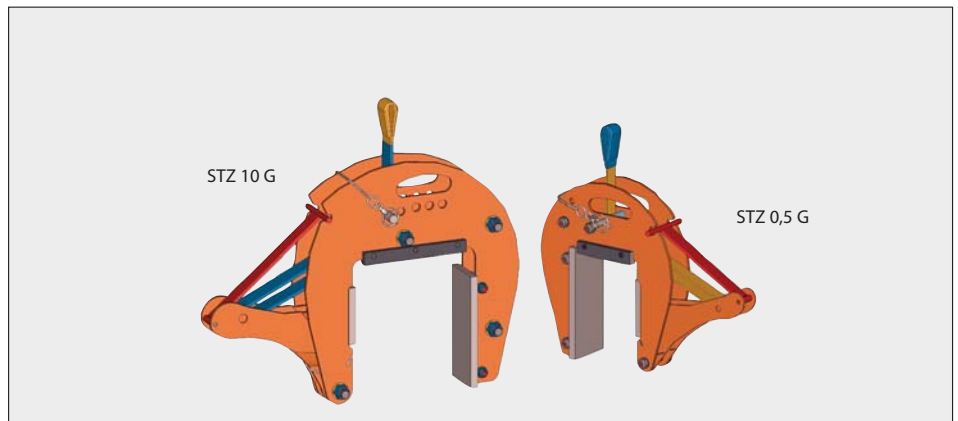

- ☐ Simple applying and disconnecting by means of holdfast application: clamp must not be lifted manually
- ☐ No adjustment of the clamping range
- ☐ Huge multiplication guarantees optimum safety
- ☐ Web sling instead of chain: light weight
- ☐ With spring tension
- ☐ Ideal for concrete and natural stones

Order No.	Model	Save Working Load kg	Typ Of Surface Coating	Clamping Range mm	Web Sling Length m	Weight kg
305 010	STZ 0,5	500	Serrated	40 - 120	0,25	8
305 011	STZ 0,5 G	500	Rubber-Lined	30 - 110	0,25	8
305 024	STZ 10	1.000	Serrated	100 - 225	0,25	14
305 025	STZ 10 G	1.000	Rubber-Lined	90 - 215	0,25	14