



EUROKLIMAT®
Let's go Natural

HEAT PUMPS AND LIQUID CHILLERS

WITH NATURAL REFRIGERANT R290 PROPANE




EFFICIENT, SUSTAINABLE AND FUTURE PROOF
R290-REVOLUTION IN THE HVACR

HEAT PUMPS & HIGH TEMPERATURE HEAT PUMPS

R290 PROPANE-TECHNOLOGY

Heating/cooling capacity in kW		Heating-Operating Range	0	50	100	150	200
HERA PE Air-to-water heat pumps		Water temperature: 20°C to 55°C Outdoor air temperature: -20°C to 35°C	35 ↔ 189 kW				
			30 ↔ 164 kW				
HERA PV HE High efficiency air-to-water heat pumps							
HERA PV HE+ Premium high efficiency air-to-water heat pumps							
HERA PE HT High temperature air-to-water heat pumps		Water temperature: 20°C to 75°C Outdoor air temperature: -20°C to 35°C	32 ↔ 172 kW				
			27 ↔ 147 kW				
HERA PV HT High temperature air-to-water heat pumps							
HYDRA Water-to-Water heat pumps		User water temperature: 20°C to 60°C Source water temperature: -10°C to 20°C	18 ↔ 270 kW				
			16 ↔ 215 kW				
HYDRA HT High temperature water-to-water heat pumps		User water temperature: 20°C to 75°C Source water temperature: -10°C to 20°C	18 ↔ 270 kW				
			16 ↔ 215 kW				

Heating Cooling

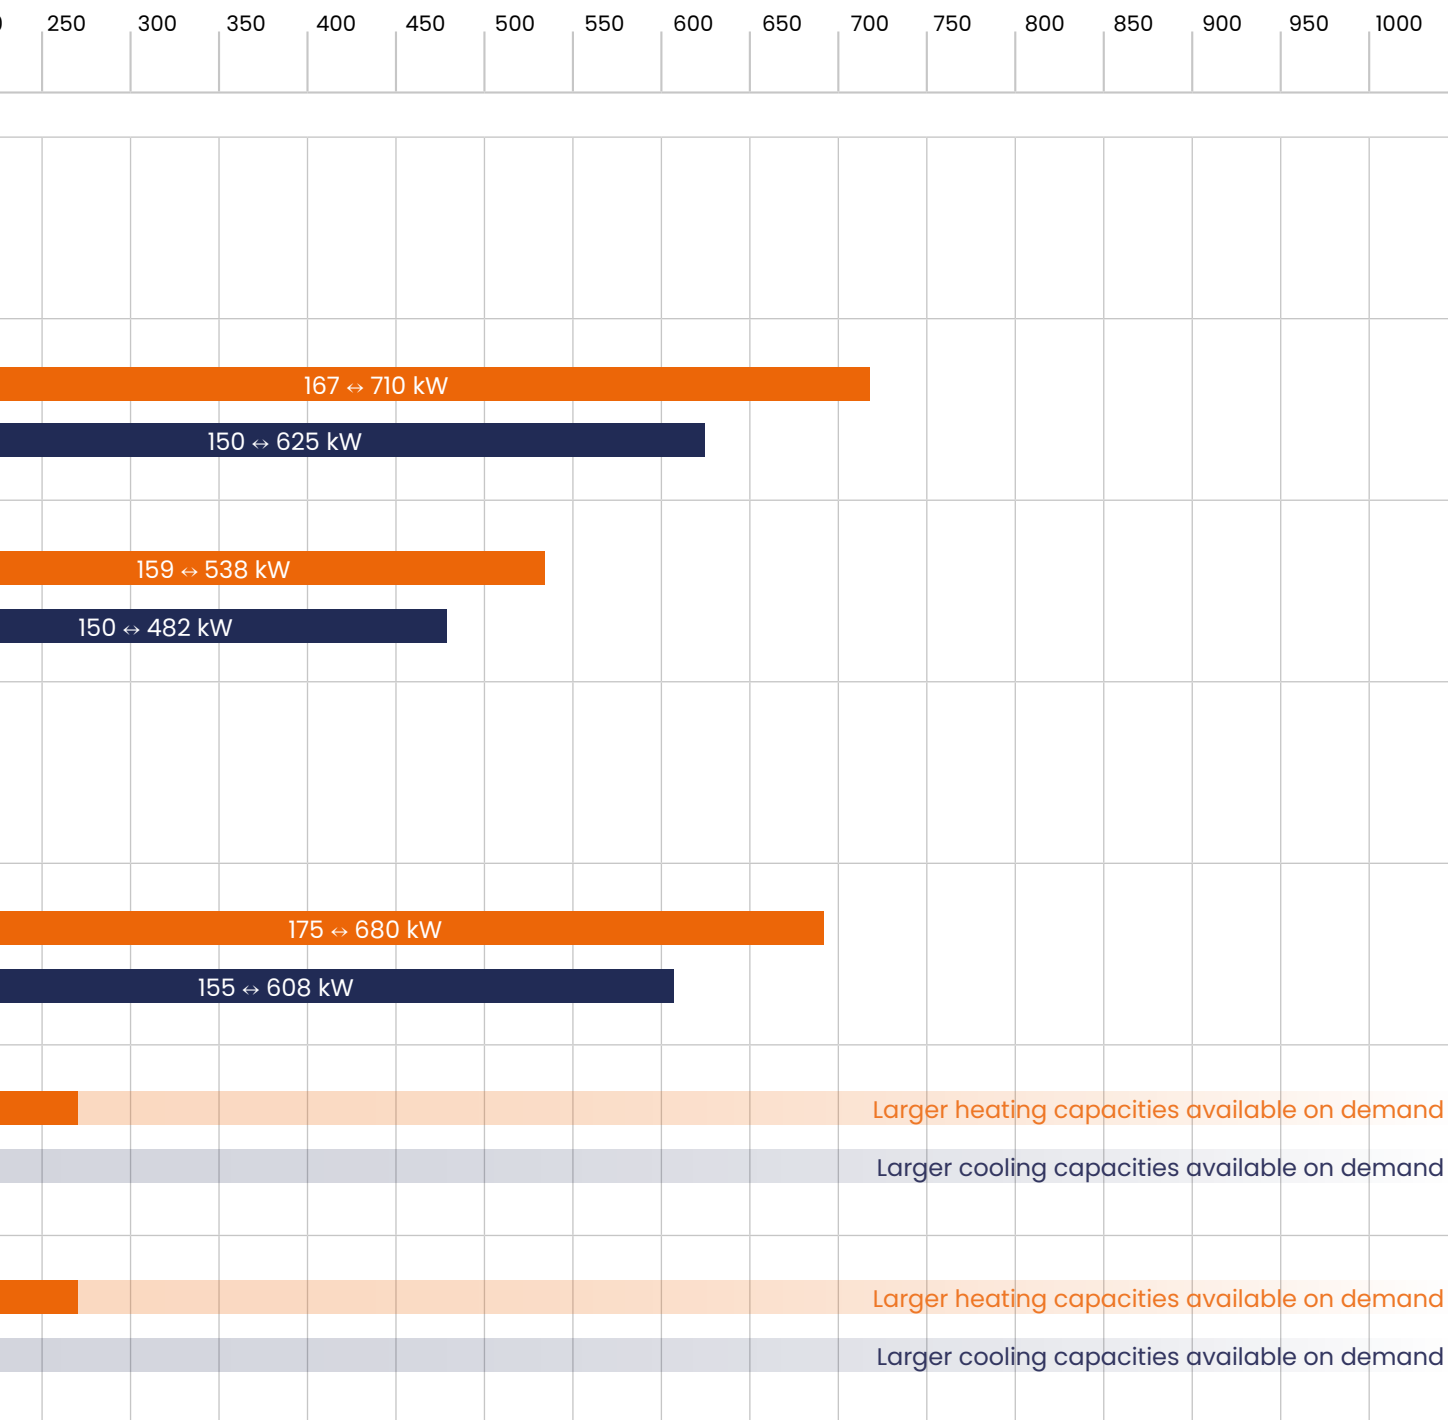

LIQUID CHILLERS FOR COMFORT AND PROCESS APPLICATIONS


R290 PROPANE-TECHNOLOGY

Cooling capacity in kW	Cooling-Operating Range	0	50	100	150	200
AURA HE High efficiency air-to-water chillers for comfort applications 	Water temperature: 0°C to 15°C Outdoor air temperature: -20°C to 45°C					
AURA HEI High efficiency air-to-water chillers for comfort applications with VFD compressors 						
TETI BS Air-to-water HT chillers for process applications 	Water temperature: 0°C to 20°C Outdoor air temperature: -20°C to 45°C					
TETI HE High efficiency air-to-water HT chillers for process applications 						
TETI.V BS Air-to-water HT chillers for process applications with screw compressors 						
TETI.V HE High efficiency air-to-water HT chillers for process applications with screw compressors 						

9 ↔ 398 kW

9 ↔ 398 kW

 Cooling

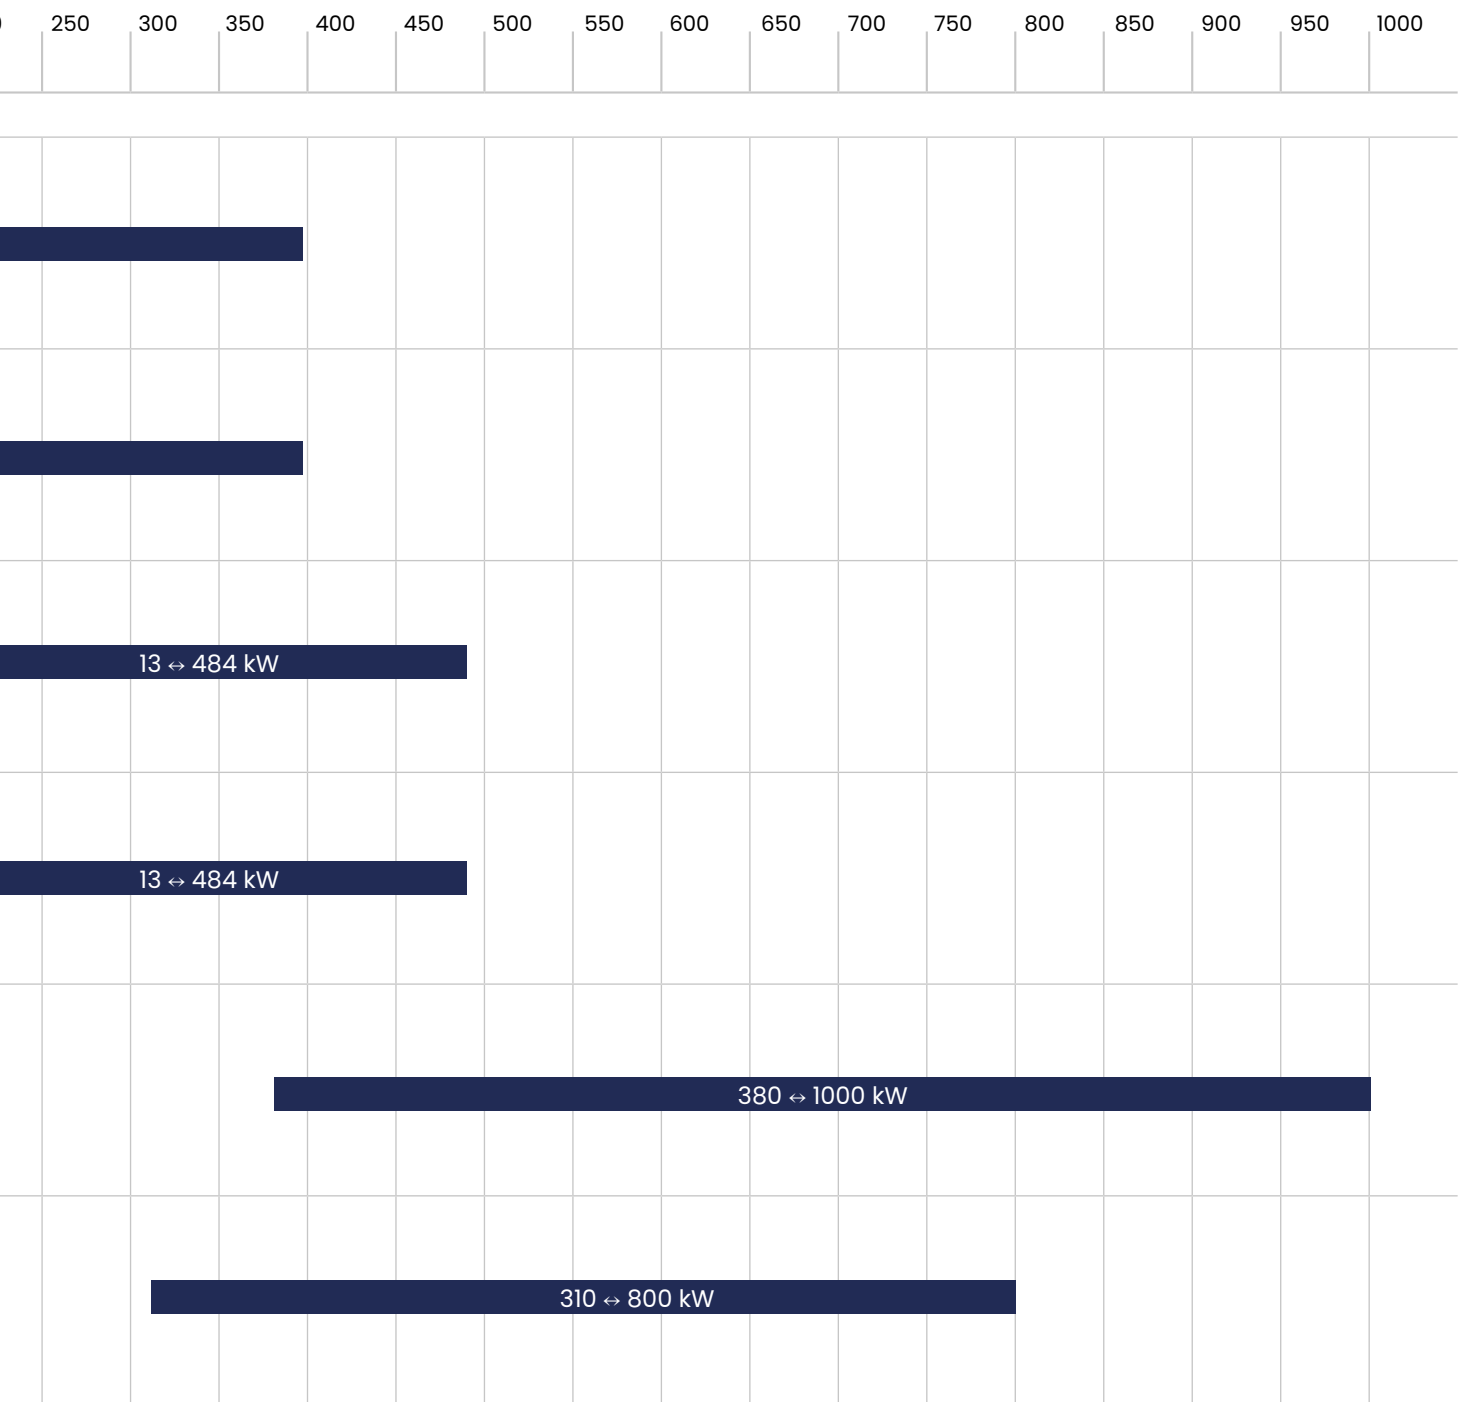

LIQUID CHILLERS FOR COMFORT AND PROCESS APPLICATIONS

R290 PROPANE-TECHNOLOGY


Cooling capacity in kW	Cooling-Operating Range	0	50	100	150	200
CRIO BS Air-to-water MT chillers for process applications 	Water temperature: -15°C to 0°C Outdoor air temperature: -20°C to 45°C					
CRIO HE High efficiency air-to-water MT chillers for process applications 						
CRIO HE+ Premium high efficiency air-to-water MT chillers for process applications 						
CRIO.V BS Air-to-water MT chillers for process applications with screw compressors 						
CRIO.V HE High efficiency air-to-water MT chillers for process applications with screw compressors 						

7 ↔ 185 kW

7 ↔ 185 kW

7 ↔ 185 kW

 Cooling

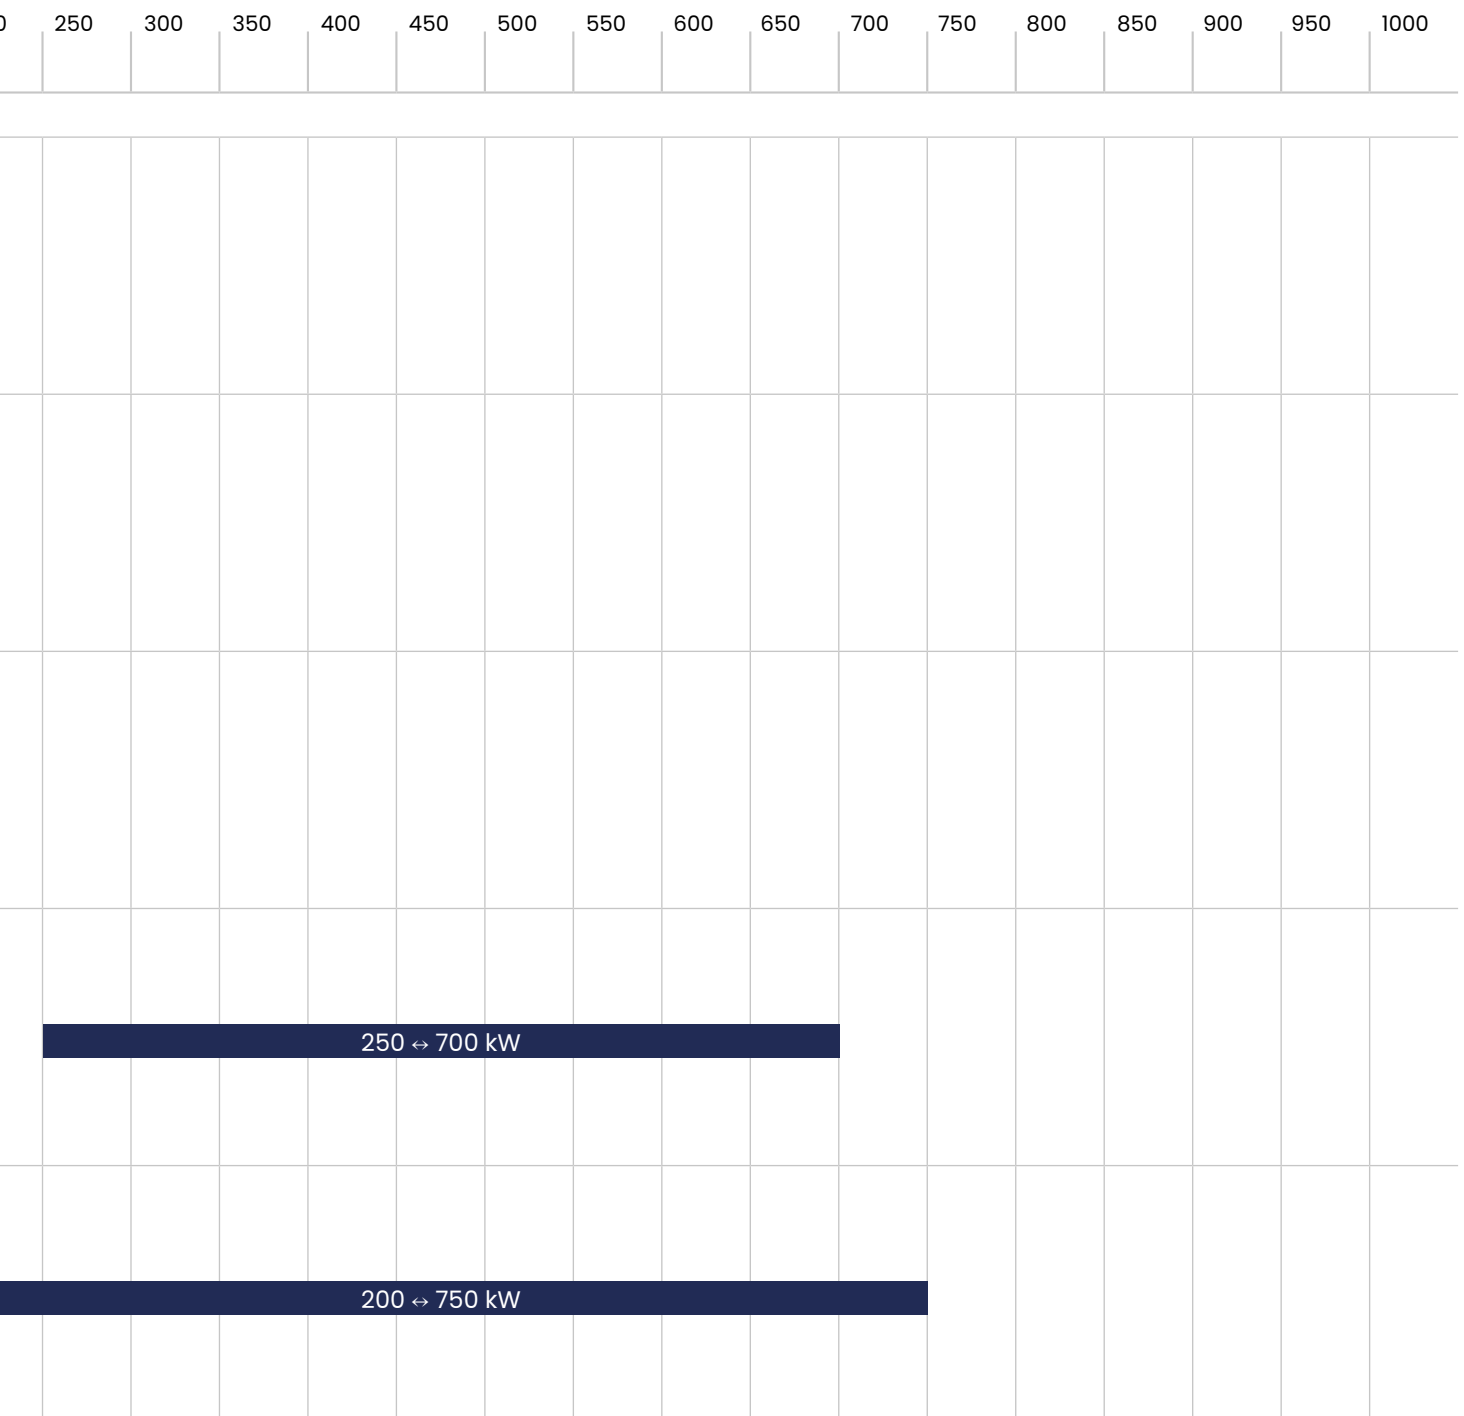



EUROKLIMAT®

Let's go Natural

CONTACTS

Euroklimat S.p.A.
Via Liguria 9
27010 Siziano PV
Italy

T. +39 0382 610282
www.euroklimat.it

99992079