

Powerful Spot Cooling for Every Job Site

Industrial Spot Cooler



Copper Tube & Aluminum Fin Heat Exchanger

High-efficiency copper tubes and aluminum fins deliver excellent heat transfer for powerful and reliable cooling performance.



3-Speed Airflow Control

Easily adjust the airflow with a simple 3-speed damper control.



Smart Energy-Saving Operation

Automatically operates based on the set temperature to reduce power consumption.



25L Large-Capacity Water Tank

The large condensate tank reduces the need for frequent emptying for added convenience.



Model	HS-SP5400K	HS-SP6600K
Outlet	2	3
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Power Consumption (W)	2,450 W	2,800 W
Ampere (A)	11.0 A	12.8 A
Cooling Capacity (W)	5,300 W (18,000 BTU/h)	6,600 W (22,500 BTU/h)
Dimensions (mm)	W520 x D620 x H1,024	W600 x D625 x H1,095
Weight (kg)	77 kg	87 kg
Refrigerant	R32	R32
Condensate tank (L)	25 L	25 L

Powerful Dehumidification for Lasting Comfort

Industrial Dehumidifier



High-Efficiency Compressor

Delivers powerful dehumidification performance optimized for industrial environments.



Advanced Heat Exchange System

Our proprietary heat exchange technology maximizes dehumidification efficiency.




User-Friendly Controls

Equipped with safety features, a timer, and automatic defrost for safe and convenient operation.



Built-In Drain Pump

The built-in drain pump enables efficient water discharge over long distances and to elevated locations.

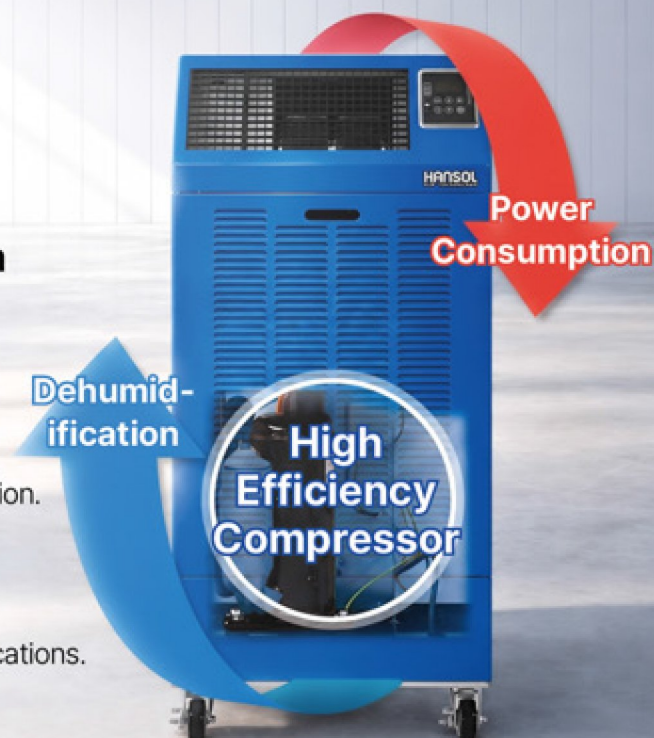

Model	HSD-120L	HSD-150L	HSD-210L	HSD-260L
Dehumidifying Capacity (L/day)	120 L/day	150 L/day	210 L/day	260 L/day
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Power Consumption (W)	1,290 W	1,790 W	2,240 W	2,470 W
Refrigerant	R410A (600g)	R410A (850g)	R410A (1,100g)	R410A (1,300g)
Dimensions (mm)	W476 x D582 x H1,118	W476 x D582 x H1,118	W572 x D582 x H1,273	W572 x D582 x H1,273
Weight (kg)	75 kg	76 kg	84 kg	85 kg

Powerful, Durable Cooling for Commercial Kitchens

Kitchen Spot Cooler



Built for Commercial Kitchens

Designed for demanding kitchen environments with high temperatures, grease, and smoke.



Airflow Reach up to 10 m

Multi-speed control delivers cool air across large spaces.




IPX4 & All-Metal Build

Water-resistant and built with a strong, durable metal exterior.




Smart Control

Features timer operation, power-off memory, and fault code display.

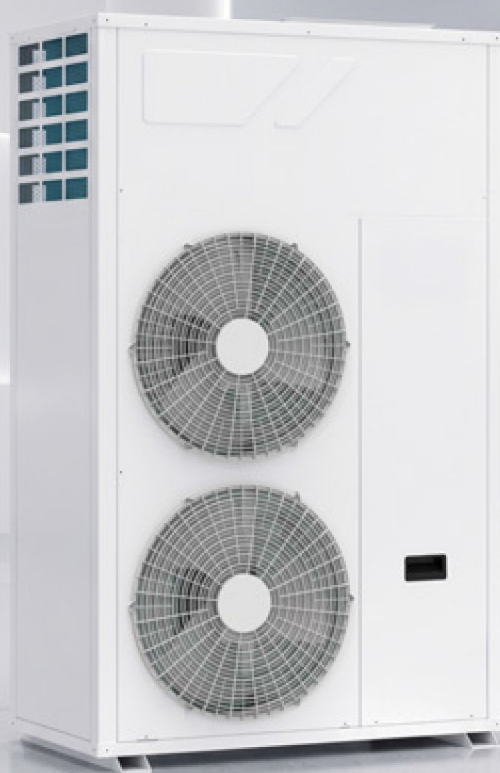

Kitchen Spot Cooler

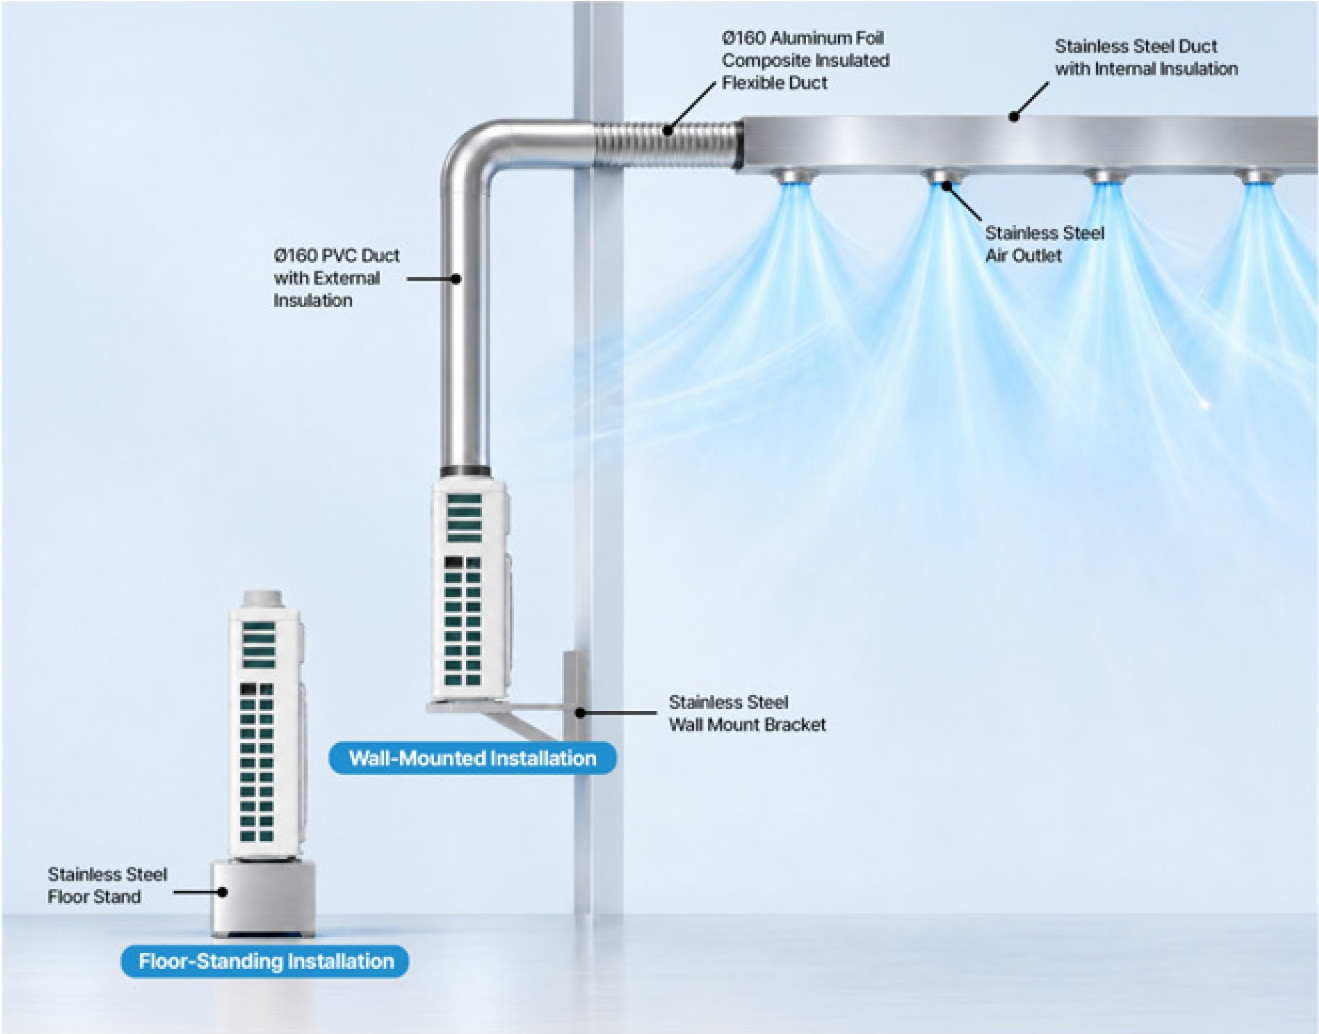

Model	HPC-5500K	HPC-8000K	HPC-10000K
Outlet	1	1	1
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Power Consumption (W)	1,700 W	2,870 W	4,300 W
Ampere (A)	7.9 A	13.2 A	20.0 A
Cooling Capacity (W)	5,200 W (17,800 BTU/h)	8,000 W (27,300 BTU/h)	9,690 W (33,000 BTU/h)
Dimensions (mm)	W911 x D386 x H1,029	W911 x D385 x H1,145	W1,030 x D575 x H1,680
Weight (kg)	62 kg	82 kg	175 kg
Refrigerant	R410A	R410A	R410A