

# REVOLUTION PI

The Industrial Pi



Powered by  
Raspberry Pi

revolutionizing the automation industry  
since 2016

PLEASE  
ALLOW  
ME TO  
INTRODUCE  
MYSELF...

# The flexible powerhouse for automation and IIoT solutions

The success story of the single-board computer Raspberry Pi has been unbroken since its introduction in 2012. By launching the very first Revolution Pi models in 2016, we expanded its success story to the industrial world.

Revolution Pi has been the first truly industry-compatible IPC based on Raspberry Pi. By using the Raspberry Pi Compute Module we were able to develop a robust and industry-compatible periphery which meets all important industrial standards incl. IEC 61131-2.

Depending on the requirements of the application, the RevPi base modules can be easily extended by expansion modules such as digital and analog IO modules as well as fieldbus gateways.



# That's why we call Revolution Pi the



# ultimate multi tool for automation & IIoT




# Software? Your choice!

Revolution Pi, while an open system, comes equipped with software and apps covering most applications. It features a **customized Raspberry Pi OS**, including a real-time kernel patch and a process image for easy value reading and writing. This approach balances the original Raspberry Pi environment with enhanced task priority control.

Applications can be programmed via **Node-RED**, **Python**, or **C**. For more flexibility,

you can build a custom image using files from our GitLab repository. Off-the-shelf solutions like **CODESYS** are also available for project realization.

Furthermore, our devices offer various built-in network protocols. These include the fieldbus protocols **Modbus RTU** and **Modbus TCP** (both master and slave functionality), as well as **MQTT** client and **OPC UA** server capabilities.



**CODESYS**



**Node-RED**



## Cloud connectivity

Collecting sensor data, processing it, and sending the processed data to a cloud is one of the Revolution Pi's key strengths, making

it an ideal IIoT gateway. Its robust hardware and versatile software enable seamless edge computing and data management, bridging

the gap between OT and IT for real-time decision-making and predictive maintenance. Revolution Pi has been certified by major cloud platforms, ensuring smooth integration with services such as Microsoft Azure, Amazon Web Services, and

Cumulocity IoT. The open-source nature of Revolution Pi allows for customization and adaptation to specific IIoT requirements, providing flexibility and scalability for diverse industrial applications.



## Security

Our devices meet EU regulatory requirements including RED DA and CRA compliance. The integrated TPM 2.0 hardware security module supports encryption and secure key storage for sensitive data\*. Secure Boot support enables system integrity verification at every startup, protecting against unauthorized

modifications. Combined with continuous security patches and long-term support (LTS), Revolution Pi provides a solid foundation for secure operation in industrial applications.

\* TPM 2.0 is available on RevPi Connect 5, RevPi Connect 4, and RevPi Flat S

# Successful across industries

Revolution Pi combines the capabilities of an Industrial PC, Soft PLC, Industrial IoT gateway, edge device, and HMI into a single solution. This versatility makes Revolution Pi the ideal platform for digital transformation across industries and applications:

## SOFTWARE DEVELOPMENT & CLOUD SOLUTIONS

supports your choice of tech stack and integrates with all major cloud platforms – with industrial-grade reliability.



## ENERGY & ENVIRONMENT

connects and manages your entire energy infrastructure: from solar panels and battery storage to heat pumps and charging stations.




OLUTION PI  
Connect 5  
32 GB eMMC

Powered by  
Raspberry Pi

Ident. No.: 100418  
YOM: 2024

Discover our  
industry solutions  
& success stories



## MECHANICAL & PLANT ENGINEERING

combines precise control, monitoring, and visualization for smart manufacturing – in both new and existing machines.

## INFRASTRUCTURE

ensures reliable processes and secure data transmission in decentralized facilities – from water treatment to grid management.

## LOGISTICS

coordinates your logistics processes, making them smart and future-ready: from warehouse management to mobile robots (AGV/AMR).

# Tailor-made solutions

For all those who prefer a more individual and exclusive approach, we have the perfect solution:

If you decide to use Revolution Pi as the standard hardware for your next project, we will manufacture our Revolution Pi modules according to your wishes. From subtle customizations like adding your company logo to comprehensive hardware and software modifications - we offer tailored solutions for your specific requirements.

This way, you don't have to spend your time on hardware development and can focus on your core business, which in turn shortens the time-to-market for your own solution – a classic win-win situation.

## CUSTOM LASER ENGRAVING

## CUSTOM COLOR

# HARDWARE MODIFICATIONS

CUSTOM  
SOFTWARE  
IMAGE

CUSTOM  
CERTIFICATIONS

# RevPi device connectivity overview



## RevPi Core SE system

## RevPi Core S system

IPC  
Base modules  
(RevPi Core series)

I/O  
Expansion modules

EtherNet/IP   EtherCAT

Gateway  
Expansion modules

RevPi Connect 5 system

RevPi Connect 4 system

RevPi Connect S system

RevPi Connect SE system



I/O  
Expansion modules



IPC  
Base modules  
(RevPi Connect series)



Gateway  
Expansion modules  
(RevPi Con modules)

# RevPi Connect 5

Base modules powered by Raspberry Pi Compute Module 5



## RevPi Connect 5 device variants

SKU	WLAN/BT	RAM	eMMC	RS485	CAN
100412	No	4 GB	32 GB	1 x	No
100413	Yes	4 GB	32 GB	1 x	No
100414	No	4 GB	32 GB	1 x	1 x
100415	Yes	4 GB	32 GB	1 x	1 x
100416	No	8 GB	32 GB	1 x	No

SKU	WLAN/BT	RAM	eMMC	RS485	CAN
100417	Yes	8 GB	32 GB	1 x	No
100418	No	8 GB	32 GB	1 x	1 x
100419	Yes	8 GB	32 GB	1 x	1 x
100420	Yes	8 GB	32 GB	No	2 x

# INTERFACES

# KEY SPECS

<b>Processor</b>	Broadcom BCM2712, quad-core ARM Cortex-A76
<b>Clock rate</b>	2.4 GHz
<b>RAM</b>	up to 8 GB LPDDR4
<b>eMMC flash memory</b>	32 GB
<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 45 x 115 mm (incl. RP-SMA socket)
<b>Operating temperature</b>	-25 °C ... +60 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>EMI/ Surge/Burst tests*</b>	Passed
<b>CE, RoHS</b>	Yes
<b>RED DA</b>	Yes**
<b>UL</b>	in progress

Interfaces	Quantity
RS485 screw terminal (X2 connector, 4 pole)	0 / 1
CAN screw terminal (X2 and X3 connector, 4 pole)	0 / 1 / 2
RJ45 Gigabit Ethernet ports	2
USB 3.2 Gen 1 sockets	2
USB-C (solely for image transfer to eMMC)	1
Micro-HDMI socket (HDMI 2.0 (4K))	1
PiBridge (for RevPi expansion modules)	2
SMA socket for connecting an external antenna	1**

\* (acc. to EN61131-2 & IEC 61000-6-2)

\*\* only applicable on devices with WLAN/BT functionality

**More details  
and specs:**



# RevPi Connect 4

Base modules powered by Raspberry Pi Compute Module 4



Device	WLAN/BT	RAM	eMMC	SKU
RevPi Connect 4	No	2 GB	8 GB	100376
RevPi Connect 4	Yes	2 GB	8 GB	100377
RevPi Connect 4	No	4 GB	32 GB	100378
RevPi Connect 4	Yes	4 GB	32 GB	100379

Device	WLAN/BT	RAM	eMMC	SKU
RevPi Connect 4	No	8 GB	32 GB	100395
RevPi Connect 4	Yes	8 GB	32 GB	100380

# INTERFACES

# KEY SPECS

<b>Processor</b>	Broadcom BCM2711, quad-core ARM Cortex-A72
<b>Clock rate</b>	1.5 GHz
<b>RAM</b>	up to 8 GB LPDDR4
<b>eMMC flash memory</b>	8 GB / 16 GB / 32 GB
<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 45 x 111 mm
<b>Operating temperature</b>	-25 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>EMI/ Surge/Burst tests*</b>	Passed
<b>CE, RoHS</b>	Yes
<b>RED DA</b>	Yes**
<b>UL</b>	Yes, UL-File-No. E494534

Interfaces	Quantity
RJ45 Gigabit Ethernet ports	2
USB 3.2 Gen 1 sockets	2
Micro HDMI socket (HDMI 2.0 (4K))	1
Micro USB 2.0 socket (for firmware uploads only)	1
PiBridge (for RevPi expansion modules)	2
SMA socket for connecting an optional antenna	1**
RS485 screw terminal (4 pole)	1
Freely programmable 24 V input	1
Freely programmable relay switching contact	1

\* (acc. to EN61131-2 & IEC 61000-6-2)

\*\* only applicable on devices with WLAN/BT functionality

**More details  
and specs:**



# RevPi Connect S / SE

Base modules powered by Raspberry Pi Compute Module 4S



## Device

RevPi Connect S 8 GB

## SKU

100362

RevPi Connect S 16 GB

100363

RevPi Connect S 32 GB

100364

## Device

RevPi Connect SE 8 GB

## SKU

100368

RevPi Connect SE 16 GB

100369

RevPi Connect SE 32 GB

100370

# INTERFACES

# KEY SPECS

<b>Processor</b>	Broadcom BCM2711, quad-core ARM Cortex-A72
<b>Clock rate</b>	1.5 GHz
<b>RAM</b>	1 GB LPDDR4
<b>eMMC flash memory</b>	8 GB / 16 GB / 32 GB
<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 45 x 110.5 mm
<b>Operating temperature</b>	-25 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>ESD protection</b>	4 kV/8 kV
<b>EMI/ Surge/Burst tests*</b>	Passed
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534

Interfaces	Quantity
RJ45 Ethernet ports (10/100 Mbit/s)	2
USB 2.0 sockets	2
Micro HDMI socket (HDMI 2.0 (4K))	1
Micro USB 2.0 socket (for firmware uploads only)	1
PiBridge (for RevPi expansion modules)	1
ConBridge (for RevPi Con expansion modules)	1
RS485 screw terminal (4 pole)	1
24 V input for shutdown signal of an UPS	1
Freely programmable relay switching contact	1

\* (acc. to EN61131-2 & IEC 61000-6-2)

More details  
and specs:



# RevPi Core S / SE

Base modules powered by Raspberry Pi Compute Module 4S



Device	SKU
RevPi Core S 8 GB	100359
RevPi Core S 16 GB	100360
RevPi Core S 32 GB	100361

Device	SKU
RevPi Core SE 8 GB	100365
RevPi Core SE 16 GB	100366
RevPi Core SE 32 GB	100367

# INTERFACES

# KEY SPECS

<b>Processor</b>	Broadcom BCM2711, quad-core ARM Cortex-A72
<b>Clock rate</b>	1.5 GHz
<b>RAM</b>	1 GB LPDDR4
<b>eMMC flash memory</b>	8 GB / 16 GB / 32 GB
<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 22.5 x 110,5 mm
<b>Operating temperature</b>	-25 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>ESD protection</b>	4 kV/8 kV
<b>EMI/ Surge/Burst tests*</b>	Passed
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534

Interfaces	Quantity
RJ45 Ethernet port (10/100 Mbit/s)	1
USB 2.0 sockets	2
Micro HDMI socket (HDMI 2.0 (4K))	1
Micro USB 2.0 socket (for firmware uploads only)	1
PiBridge (for RevPi expansion modules)	2


\* (acc. to EN61131-2 & IEC 61000-6-2)

More details  
and specs:



# RevPi DIO / DI / DO

Digital IO expansion modules

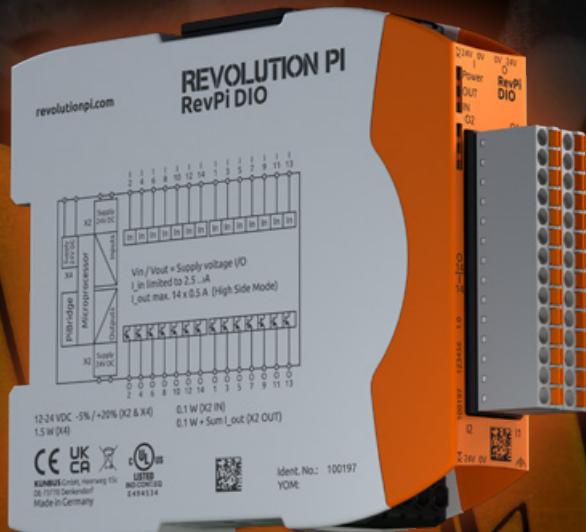

Device	Function	SKU
RevPi DIO	Digital IO module	100197
RevPi DI	Digital Input module	100195
RevPi DO	Digital Output module	100196

# INTERFACES

# KEY SPECS

<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Max. power consumption</b>	1.5 Watt (X4/power supply)
<b>Size (H x W x D)</b>	96 x 22.5 x 110.5 mm
<b>Operating temperature</b>	-40 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>Connectors</b>	2 x 14-pin socket connectors with spring clamp contacts (0.2 - 1.5 mm <sup>2</sup> )
<b>Input current limitation</b>	2.4 mA (at 24 V power supply)
<b>Maximum current per output</b>	500 mA (high-side mode), 100 mA (push-pull mode)
<b>Surge/Burst tests*</b>	Passed
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534


Device	No. of digital Inputs	No. of digital Outputs
RevPi DIO	14	14
RevPi DI	16	0
RevPi DO	0	16

More details  
and specs:



# RevPi AIO

Analog IO expansion module

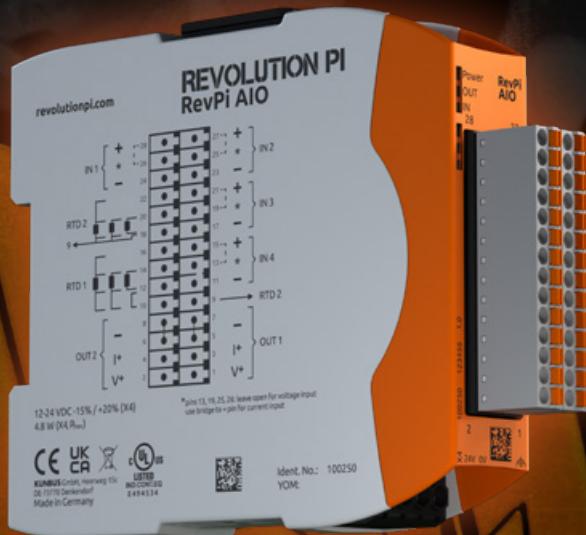

Device	Function	SKU
RevPi AIO	Analog IO module	100250

## INTERFACES

## KEY SPECS

<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 22.5 x 110.5 mm
<b>Operating temperature</b>	-30 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>Connectors</b>	2 x 14-pin socket connectors with spring clamp contacts (0.2 - 1.5 mm <sup>2</sup> )
<b>Voltage measuring range</b>	±10 V   ±5 V   0 ... 10 V   0 ... 5 V
<b>Current measuring range</b>	0 ... 20 mA   0 ... 24 mA   4 ... 20 mA   ±25 mA
<b>Temperature measuring range</b>	-200 ... +850 °C
<b>Voltage output range</b>	±10 V   ±11 V   ±5 V   ±5.5 V   0 ... 10 V   0 ... 11 V   0 ... 5 V   0 ... 5.5 V
<b>Current output range</b>	0 ... 20 mA   0 ... 24 mA   4 ... 20 mA
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534

Interface	Quantity
Input channels	6
for voltage	max. 4
for current	max. 4
for RTD (PT100/PT1000)	2
Output channels	2
for voltage	max. 2
for current	max. 2

More details  
and specs:



# RevPi MIO

Analog & Digital IO expansion module



## Device

RevPi MIO

## Function

Analog & Digital IO module

## SKU

100323

# INTERFACES

# KEY SPECS

<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Max. power consumption (system)</b>	10 W
<b>Size (H x W x D)</b>	96 x 22.5 x 110.5 mm
<b>Operating temperature</b>	-20 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>Connectors</b>	2 x 14-pin socket connectors with spring clamp contacts (0.2 - 1.5 mm <sup>2</sup> )
<b>Analog IO voltage range</b>	0 ... 10 V DC
<b>Analog IO modes</b>	Analog input, analog output, logic level input, logic level output
<b>Digital IO modes</b>	Digital input, digital output, PWM input, PWM output, pulse input, pulse output, encoder input
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534

<b>Analog IO</b>	<b>Quantity</b>
Analog Input	8
Analog Output	8

<b>Digital IO</b>	<b>Quantity</b>
Digital Input/Output	4

configurable via software either as digital inputs or digital outputs

More details  
and specs:



# RevPi RO

## Relay output expansion module



Device	Function	SKU
RevPi RO	Relay output module	100386

## INTERFACES

## KEY SPECS

<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Max. power consumption (system)</b>	2.5 W
<b>Size (H x W x D)</b>	96 x 22.5 x 126 mm (incl. connectors)
<b>Operating temperature</b>	-20 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	85 %, non-condensing
<b>Protection class</b>	IP20
<b>Relay type</b>	NO (normally open)
<b>Resistive load</b>	5 A at 250 V AC / 5 A at 30 V DC
<b>Inductive load (<math>\cos \varphi = 0.4</math>, <math>L/R = 7 \text{ ms}</math>)</b>	2 A at 250 V AC / 2 A at 30 V DC
<b>CE, RoHS</b>	Yes
<b>No. of Outputs</b>	4
<b>Connectors</b>	4 x 2-pin socket connectors with spring clamp contacts (0.08 - 1.5 mm <sup>2</sup> )

More details  
and specs:



# RevPi Gates

## Fieldbus gateways expansion modules



Device	Protocol	SKU
RevPi Gate PROFINET IRT	PROFINET IRT Device	100074
RevPi Gate EtherCAT	EtherCAT Slave	100073
RevPi Gate EtherNet/IP	EtherNet/IP Adapter	100066
RevPi Gate PROFIBUS	PROFIBUS Slave	100069

# KEY SPECS

<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	96 x 22.5 x 110.5 mm
<b>Operating temperature</b>	0 °C ... +60 °C
<b>Storage temperature</b>	-25 °C ... +70 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>CE, RoHS</b>	Yes
<b>UL</b>	Yes, UL-File-No. E494534



EtherNet/IP

EtherCAT



Like the IO expansion modules, the gateways are connected to the base module via the overhead PiBridge connector. Depending on the base module, up to two gateway modules can be connected per system (one gateway per PiBridge).

**Please note, that these gateways are not suitable for RevPi Connect 4, RevPi Connect SE, and RevPi Core SE series.**

More details  
and specs:



# RevPi Con

Gateway expansion modules, exclusively for RevPi Connect S/SE



## Device

RevPi Con MBus

## Protocol

Wireless M-Bus 868 MHz

## SKU

100281

RevPi Con MBus<sup>VHP</sup>

Wireless M-Bus 169 MHz

100282

RevPi Con CAN

CAN bus

100286

# KEY SPECS

<b>Power supply</b>	Power supply via ConBridge
<b>Size (H x W x D)</b>	96 x 22.5 x 110.5 mm
<b>Operating temperature</b>	-20 °C ... +60 °C
<b>Storage temperature</b>	-40 °C ... +70 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>CE, RoHS</b>	Yes

Besides the PiBridge, the RevPi Connect S/SE modules have a so-called ConBridge connector. This interface makes it possible to connect special expansion modules to the right side of the base module, called RevPi Con modules.

In addition to data transfer, the ConBridge also supplies power to these modules, unlike the usual expansion modules that are connected via the PiBridge. Like all other expansion modules for Revolution Pi, the RevPi Con expansion modules are housed in a 22.5 mm wide DIN rail housing.

**Please note, that all RevPi Con expansion modules are only suitable for RevPi Connect S/SE series.**

More details  
and specs:



# RevPi Flat S

powered by Raspberry Pi Compute Module 4S

The RevPi Flat S is a non-modular device which can be due to its size spacesavingly installed in sub-distribution cabinets.



Device

RevPi Flat S

SKU

100371

More details about  
RevPi Flat S:



# KEY INTERFACES

# KEY SPECS

<b>Processor</b>	Broadcom BCM2711, quad-core ARM Cortex-A72
<b>Clock rate</b>	1.5 GHz
<b>RAM</b>	1 GB LPDDR4
<b>eMMC flash memory</b>	32 GB
<b>Power supply</b>	24 V DC (10.8 ... 28.8 V DC)
<b>Size (H x W x D)</b>	90 x 106 x 70 mm
<b>Operating temperature</b>	-25 °C ... +55 °C
<b>Storage temperature</b>	-40 °C ... +85 °C
<b>Humidity</b>	93 %, non-condensing
<b>Protection class</b>	IP20
<b>EMC interference emission</b>	according to EN 61000-6-4
<b>EMC immunity</b>	according to EN 61000-6-2
<b>CE, RoHS</b>	Yes

Interfaces	Quantity
RJ45 Ethernet ports (10/100 Mbit/s)	4*
USB 2.0 sockets	2
RS485 (spring-loaded terminal)	1
RS485 (RJ12 socket)	1
Digital Output (potential free)	1
Analog Output (0-10 V DC)	1
Analog Input (0-10 V DC or 0 ... 20 mA)	1
WLAN (RP-SMA socket)	1

\* two or four separate MAC addresses for LAN0/switch or LAN0 ... LAN3;  
LAN0: 1 x Ethernet; LAN1: 3 x Ethernet switched or single (DSA)



# KUNBUS

the company behind Revolution Pi

Prior to developing Revolution Pi, KUNBUS, founded in 2008, was primarily active in the field of industrial communication, specializing in the development and manufacturing of communication solutions for automation, process control, manufacturing, and drive technology.

## Revolution Pi – Made in Germany

We are particularly proud of the fact that our devices are not only engineered by us, but also produced – in accordance with ISO 9001 – in Germany. This enables us to meet and verify the high quality standards that our customers and we ourselves demand. Regular quality controls, which ensure complete traceability of batches and 100 % end-of-line tests, play an important role.

Our in-depth knowledge in industrial communication is not only the foundation for our past successes, but also plays a crucial role in the continuous development and improvement of Revolution Pi.



WELL , WHAT AM I ?  
IIOT GATEWAY,  
DIN-RAIL IPC,  
EDGE DEVICE OR  
SMALL CONTROL  
UNIT?

IT IS  
YOUR  
CALL!



**revolutionpi.com**  
**REVOLUTION PI**  
a KUNBUS brand

Errors excepted and possible alterations without prior notice. Pictures may vary.

EN.25.W4