

GENERAL CATALOG



Low Energy and Water Consumption
Easy Montage

Freva is a Member of **FORM** Group of Companies

ABOUT US

FORM Freva Soğutma Sistemleri A.Ş. with its dynamic engineering and manufacturing team based on more than 20 years of knowledge and experience, provides design, manufacturing and turnkey installation services of process water cooling equipment for the comfort and industrial sector.

The devices subject to activity are open and closed type cooling towers, hybrid type (which can operate as semi-wet-semi-dry) cooling towers, dry and adiabatic coolers, evaporative and adiabatic condensers and industrial type fin fan dry type coolers. Especially in today's conditions where energy and water resources are of great importance, our experienced engineer staff aims to support businesses in the process of deciding on the most suitable device for the future by making the necessary feasibility studies through our state-of-the-art product selection programs in order to minimize both energy and water costs in line with the demands of the sector..

MISSION

As FORM Freva Soğutma Sistemleri A.Ş. , our mission is to establish a company that continuously develops itself with its dynamic and experienced engineer and manufacturing team, aims at maximum customer satisfaction, has environmental awareness, and pioneers design, project and production services for the expectations of all sectors.

VISION

As a result of our R&D activities that we will carry out continuously, to be the leading brand that offers the latest technological products for the needs of the sector and is preferred.

CONTENTS

Innovative Cooling Solutions with a Wide Product Range	5
Open Circuit Cooling Towers	5
Closed Circuit Cooling Towers	6
Evaporative Condenser	6
Adiabatic and Dry Coolers	6
Tower Equipment	7-9
Film Fill	7
Centrifugal Pump	7
Coil	7
Water Distribution System	8
Drift Eliminator	8
Air Intake Louver	8
Axial Fan	8
Radial Fan	9
Electric Motor	9
Basin Water Heaters	9
Casing	9
Vibration Switch	9
Mechanical Level Float	9
Optional Solutions	10
Semi Closed System Solutions	10
Our Optional Equipment	10
Different Color Options	11
Maintenance Platform	11
Basin Sweeping System	11
Silencer	12
Antivortexhood	12
MCC ve DDC Electrical Panel and Automation Systems	12
Electronic Water Level Control	12
Filtration System	12
Spare Parts	13

INNOVATIVE COOLING SOLUTIONS WITH A WIDE PRODUCT RANGE

Thanks to its wide product range, FORM Freva offers solutions with low energy and water consumption for the Industrial Cooling, Comfort Cooling and Power generation markets in line with the demands of its customers.



Open Circuit Cooling Towers



FRV Series
Open Circuit-
Counter-Flow
Cooling Tower (FRP)



TAY Series
Open Circuit-
Counter-Flow
Cooling Tower



RTAY Series
Open Circuit
Counter-Flow Cooling
Tower (With Radial Fan)



TXY Series
Open Circuit
Cross-Flow Cooling
Tower

Closed Circuit Cooling Towers



TCY Series
Closed Circuit
Counter - Flow
Cooling Tower



TY-SON Series
Closed Circuit with Fill
Added Counter - Flow
Cooling Tower



RTCY Series
Closed Circuit Counter
- Flow Cooling Tower
(With Radial Fan)



RTCY Series
Closed Circuit Counter
- Flow Cooling Tower
(With Radial Fan)

Evaporative Condenser



FEC Series
Closed Circuit
Counter-Flow
Evaporative Condenser

Adiabatic and Dry Coolers



**V Type Adiabatic&Dry
Cooler**



**H Type Adiabatic&Dry
Cooler**



Fin Fan Cooler



Condenser

Tower Equipment

Film Fill



The fillings used in the cooling tower are of our special design, and they are designed for maximum heat and mass transfer between air and water. Thanks to its special form, it delays contamination. Except for special cases, it is manufactured from PVC material. It has an operating resistance up to -5 / 55°C and is "ASTM E84 Cls. It is in the A" non-flammability class.

Centrifugal Pump




In all our models, volute, single-stage, end-suction, closed impeller and monoblock centrifugal pumps are used.

Coil



Cooling tower coils will be manufactured from high quality steel pipes with hydrostatic test and are subjected to hot dip galvanizing process after manufacturing. At the same time, we have stainless steel applications depending on the request of our customers. The coils are placed horizontally in the tower and are tested with 10 bar compressed air in the test pool.

Water Distribution System

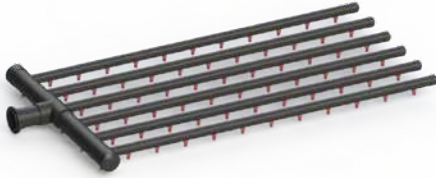


It consists of PVC process water distribution pipes and PP nozzle groups. It is designed to distribute the process water evenly over the entire surface. Developed for high water delivery performance at low pressure. In this way, it provides energy savings in pump lines. It can be easily disassembled and mounted with the threaded connection.

Drift Eliminator




The drift eliminator used in the cooling tower prevents the process water from leaving the circuit by air, up to 0.02% of the cycle water. This reduces water and chemical consumption. It is very light as it is made of PVC material. In this way, the water distribution system can be easily disassembled in case of maintenance.

Air Intake Louver

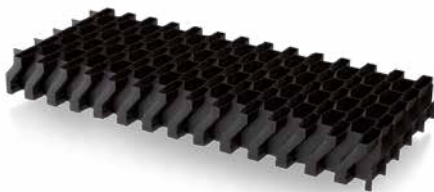

The louvers used in the cooling towers allow to keep the water in the cooling tower inside and to keep the external pollution out. The design of the louver has been designed in such a way that it takes the fresh air into the tower in the most efficient way. Thanks to its special form, it minimizes the formation of algae by not letting the sunlight in.

Axial Fan

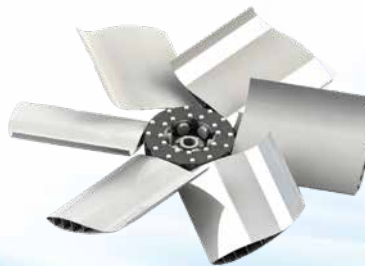

Fans in different models and material classes can be used in the cooling towers. All fans used are manufactured according to the latest generations of their design classes. Silent, Ultra-quiet options and different material options are available for corrosion resistance.

Radial Fan



Fans in different models and material classes can be used in the cooling towers. All fans used are manufactured according to the latest generations of their design classes. Silent, Ultra-quiet options and different material options are available for corrosion resistance.

Casing



As the general material of the outer body, Z600 is produced from 600 grams of galvanized sheet per square meter. The inner and outer surfaces of the sheets are coated with polymer-based epoxy paint. Stainless steel applications are also made according to the customer's requests.

Electric Motor



An electric motor is a device that converts electrical energy into mechanical energy. Electric motors generate force by the interaction between the magnetic field and the winding current and are positioned above the carrier base. The motors used in water cooling towers have IE3 or higher energy class. The electric motor is the component that creates the fan torque. The torque of the motor is transmitted to the fan by belt or gear.

Vibration Switch



It is located at the top of the tower right next to the fan stack. It detects the vibration in case of working with vibration in the fan group and ensures that the electric motor is deactivated.

Basin Water Heaters



Required for cooling tower operation in winter conditions. The temperature of the basin water is controlled with the help of a temperature transmitter. This prevents the basin water from freezing. Copper and stainless steel materials can be used.

Mechanical Level Float



The float level valve is used for basin water level control, the float height can be adjusted with the horizontally designed arm. When the liquid level rises, the valve closes, or on the contrary, with the rise in the liquid level, the valve opens and begins to discharge.

Optional Solutions

Semi Closed System Solutions

Advantages

- Low initial investment cost.
- Low operating cost.
- Low chemical requirement.
- Low fan electricity consumption
- Clean process water.



Thanks to the plate heat exchanger placed between the cooling tower circuit and the process circuit, your process will be protected from the polluting effects in the environment. Your process will always be protected from the effects of the external environment, as the cooling tower circuit will return within itself and the process water will complete the circuit within itself. At the same time, businesses using antifreeze would need lower antifreeze usage. Thus, it will reduce the cost of antifreeze.

Our Optional Equipment




Ultra-quiet fans are very quiet compared to expensive and bulky sound-damping equipment. Specially manufactured ultra-quiet fans produce a noise level of 20 db lower than conventional fans. Ultra-quiet fans are manufactured from 710 mm to 10.400 mm.

Different Color Options



Desired color applications are available according to the needs of our customers. Different color options are offered after our customer specifies the color code they want.

Maintenance Platform

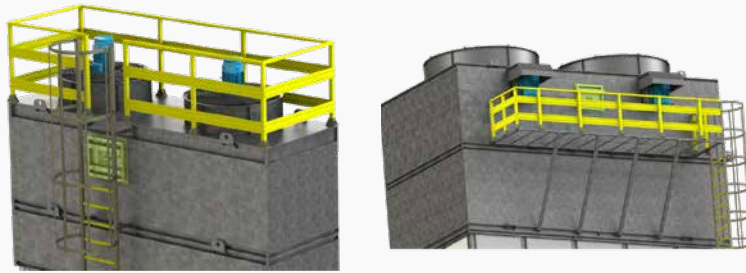


We have specially designed platforms for the maintenance and repair of cooling towers. It is produced from FRP material as standard. It can also be produced as galvanized steel or stainless on special request.

Basin Sweeping System




Thanks to our specially designed sweeping system installed in the tower basin, continuous water circulation is provided on the basin floor. In this way, the formation of sediment on the bottom of the tower basin is prevented, and the tower basin remains clean at all times. By preventing tower performance degradation, your tower will always remain clean.

Silencer



Desired sound level values are provided with special silencers designed to provide the desired sound levels in cooling towers.

Antivortexhood

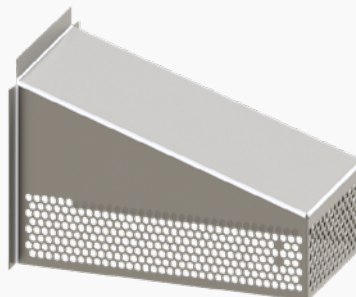

If the pump is not supplied with enough water, it will run dry. As a result, unhealthy operation and malfunctions are inevitable. The main purpose of Antivortexhood is to protect the circulation pump against dry running and cavitation.

MCC and DDC Electrical Panel and Automation Systems



The water cooling tower automation panel provides the operation of the Fan, Pump and Electric heaters on the tower. For the operation of these equipments, motor driver screens, buttons and signal lamps located on the panel lining sheet are used. The first fan drive is called the Master in the system. The entire control scenario runs through this driver. Tower outlet water temperature sensor PT100 is connected. Depending on the temperature, it operates both itself and other drivers with PI control. It also provides output to the pump motor during its operation. It performs the start and stop operations with the signal to be received from the vibration switches. The panel provides power output to the electric heater and this output is switched on and off with buttons. The electric heater performs its operation depending on its own thermostat.

Electronic Water Level Control



It is designed to control the basin water level electromechanically. Unaffected by variable environmental conditions, the water level in the basin is measured magnetically and brought to the desired level with a solenoid valve. The mains pressure should be at most 10 bar. Electronic equipment is also available for overflow or low water level alarms. In this way, the operation of the cooling tower is facilitated and the basin water level can be monitored from the central systems.


Filtration System



The water cooling tower filtration system filters the particles in the water and removes them from the cooling tower. In this way, the performance of the cooling tower will be increased. The risk of corrosion is reduced. It will provide low energy and chemical consumption.

Spare parts

FORM Freva is your best supplier of parts for all cooling tower and dry cooler equipment.



FREVA
cooling



FORM FREVA SOĞUTMA SİSTEMLERİ A.Ş.

🌐 www.formfreva.com ✉ info@formgroup.com

FORM Freva Soğutma Sistemleri A.Ş.

Eyüpsultan Mah. İbni Sina Cad. No: 7 Sancaktepe, İstanbul, Türkiye