


FINN[®]

SMARTER WAYS TO WORK[™]

HydroSeeders[®]

More Jobs. More Profits. **More Success.**

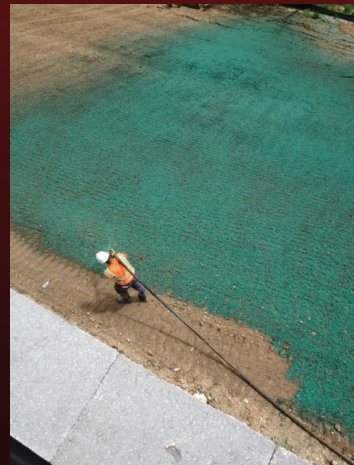



T60S

Skid Mount Only

Coverage m²	674*
Working Weight	3,253 kg
Power	Kohler CH730, 23.5 hp (17.5 kW), 2 cylinder, OHV, air cooled, gas
Tank Size	1,890 L work cap. / 2,270 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 245 lpm @ 5 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 27m from end of the tower**

T30S

Skid Mount Only

Coverage m²	379*
Working Weight	2,068 kg
Power	Kohler CH620, 19hp (14.2 kW), electric start, air cooled, gas
Tank Size	1,070 L work cap. / 1,268 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 227 lpm @ 4 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 23m from end of the tower**



MBH6

Skid Mount Only

Capacity	4.6m ³
Application Rate/Hour	Two operators: 11.5 Cubic meters/hour
Hose Reel Capacity	45.7m of standard 10.16cm diameter hose
Power	Yanmar 4TNV98C (3.3L) Tier 4 Final Diesel, 67HP (50kW)
Blower	725 CFM @ 12 psi (20.5cmm @82.7kPa)
Empty Weight (Includes Hose Reel with Hose)	3,402 kg
Working Weight	5,704 kg



MBM3

Skid Mount Only

Capacity	2.29m ³
Application Rate/Hour	Two operators: 7.65 Cubic meters/hour
Hose Reel Capacity	45.7m of standard 10.16cm diameter hose
Power	Yanmar 3TNV88C-DYEM (1.642L) Tier 4 Final Diesel, 35.1HP (26.2kW)
Blower	500 CFM @ 10 psi (14cmm @69kPa)
Empty Weight (Includes Hose Reel with Hose)	2,404 kg
Working Weight	3,629 kg





T170

Skid Mount Only

Coverage m²	2023*
Working Weight	11,022 kg
Power	Cummins QSF 2.8 Diesel Tier 4F, 65hp (48 kW)
Tank Size	5,680 L work cap. / 6,625 L liquid cap.
Pump	Centrifugal 10.2 cm x 5 cm, 1,210 lpm @ 8 Bar, 2.54 cm solid clearance
Discharge Distance	Up to 61m from end of the tower**



T120S

Skid Mount Only

Coverage m²	1349*
Working Weight	7,394 kg
Power	Yanmar 3TNV88C-DYEM, 35.1hp (26.2 kW), 3 cylinder water-cooled diesel engine (Tier 4 Final)
Tank Size	3,790 L work cap. / 4,468 L liquid cap.
Pump	Centrifugal 10 cm x 5 cm, 646 lpm @ 7 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 55m from end of the tower**



T90S

Skid Mount Only

Coverage m²	1079*
Working Weight	6,106 kg
Power	Yanmar 3TNV88C-DYEM, 35.1 hp (26.2 kW), 3 cylinder water-cooled diesel engine (Tier 4 Final)
Tank Size	3,030 L work cap. / 3,558 L liquid cap.
Pump	Centrifugal 10 cm x 5 cm, 646 lpm @ 7 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 55m from end of the tower**



T75S

Skid Mount Only

Coverage m²	943*
Working Weight	4,177 kg
Power	Kohler CH730, 23.5 HP (17.9 kW), 2 cylinder, OHV, air cooled, gas
Tank Size	2,650 L work cap. / 3,100 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 245 lpm @ 5 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 27m from end of the tower**

Hydroseeder Disclaimers

*Based on 1680 kg/Ha. May vary based on material used and application.

**Discharge distances based on testing in a specific controlled environment. Actual results may vary.



L20i

Estimated Coverage: 204 m²
 Working Weight: 998 kg*
 Power: 11,28 HP Lifan Gas
 Tank Size: 757 Liter Polyethylene
 Pump: Jets, 949 Lpm, 2.96 Bar
 Dimensions: L: 196 cms, W: 138 cms, H: 124 cms

Manufactured for Easy Lawn by DWTXS



L30

Estimated Coverage: 372 m²
 Working Weight: 1,524 kg*
 Power: 8,7 kW Honda Gas
 Tank Size: 1,140 Liter Polyethylene
 Pump: Jets, 1,140 Lpm, 3 Bar
 Dimensions: L: 249 cms, W: 132 cms, H: 150 cms



L55

Estimated Coverage: 604 m²
 Working Weight: 2,767 kg*
 Power: 18,6 kW Kohler Gas
 Tank Size: 1,520 Liter Polyethylene
 Pump: Jets, 2,470 Lpm, 6 Bar
 Dimensions: L: 300 cms, W: 155 cms, H: 168 cms

*Full weight with water.