



Changzhou



SIMADE

思 马 德

Changzhou Simade Power Equipment Manufacturing Co.,Ltd

Add : NO.5-501, 6-501, Boji Zhiyangu, Market North Road, Zouqu Town, Changzhou, Jiangsu 213144, P.R.C.

Tel: +86 519 8596 6391 +86519 8596 6390

Fax : +86 519 8550 3006 +86 519 85966395

E-mail: emilyliu@simade.com.cn sales2@simade.com.cn

Web : www.simade.biz



SIMADE

思 马 德

PRODUCTS
CATALOGUE

PROFESSIONAL GARDEN MACHINERY



www.simade.biz

SINCERITY

QUALITY

PROFESSIONAL

EFFICIENT

BRIEF INTRODUCTION

We are sincerely looking forward
to long-term business relationship
with you !

- ◆ Enterprise Spirit
- ◆ Innovation
- ◆ Team Work
- ◆ Creating Value For Customers

Changzhou Simade Power Equipment Manufacturing Co.,Ltd is a professional manufacturer of garden machinery. We are located at Yangtze Rive delta region of beautiful scenery and convenient transportation, Changzhou, China.

Our products include multifunction machine tillers and trimmers. Approved by GS, CE, EMC, NOISE, EU V and ISO 9001 certifications.

The product range covers from DIY to professional with different power sources: gasoline engine, AC motor, and lithium-ion battery.

We have a professional design team and a strong manufacturing Capability. We manufacture the main parts by ourselves.

Our products have been exported to cover 50 countries and regions, including Europe, South America, Southeast Asia and Middle East.

Quality control and customer service are just some of our main concerns. We recognize that after-sale service is very important to keep good relationships with our partners. That's why we are constantly looking for better ways to deal with the customer's requirements, improving quality and facilitating orders as quickly and precisely as possible.
OEM and ODM are always welcome.

SIMADE
思 马 德

CONTENTS

Multifunction Machine

- 03 MF380
- MF400
- 07 MF360

Grass Burning Machine

- 09 SC2000
- SC2000S

Ignition Device

- 09 DH2000
- DH2000D

Power Tiller

- 11 T10XE
- WT450D
- 12 T20XE-2
- WT450E

Gasoline Tiller

- 14 T10X
- T20X-3
- 15 WT450
- WT450R
- WT360-1
- 16 WT360-2
- RST360-1
- RST360-2
- 17 T40X-3
- T40X-5
- WT550
- WT550R
- 18 WT800
- WT800R
- T50
- T50-2

Shovel

- 19 UDB200

Grass Cutter

- 21 UGC300
- UGC350
- UGC400
- UGC500

Optional Accessories

MF400

Engine	Single Cylinder, Air-Cooled OHV, 4-Stroke, Horizontal, Single Shafts
Max Output (HP/KW/rpm)	13-15/9.6-11/3600
Fuel Tank Capacity (L)	6
Engine Oil Capacity (L)	1.1
Gear Box Material	AL - ALLOY
Transmission Type	Gear
Transmission	3F + 3R
PTO Speed (rpm)	990
Tire Size	5.00-10(500mm)
Axle Diameter (mm)	25
Clutch Type	Hydraulic Wet Clutch
Adjustable Handle	In height and sideways
Differential Mechanism	Yes
Steering Brake	Yes
Net Weight (kg)	105
Meas. (cm)	108x67x85
Type Of Packing	Wooden Box
QTY. (20', 40', 40'HC)	36/72/108

MF380

Engine	Single Cylinder, Air-Cooled OHV, 4-Stroke, Horizontal, Single Shafts
Max Output (HP/KW/rpm)	13-15/9.6-11/3600
Fuel Tank Capacity (L)	6
Engine Oil Capacity (L)	1.1
Gear Box Material	AL - ALLOY
Transmission Type	Gear
Transmission	3F + 3R
PTO Speed (rpm)	990
Tire Size	5.00-10(500mm)
Axle Diameter (mm)	25
Clutch Type	Dry Clutch
Adjustable Handle	In height and sideways
Differential Mechanism	Yes
Steering Brake	Yes
Net Weight (kg)	95
Meas. (cm)	108x67x85
Type Of Packing	Wooden Box
QTY. (20', 40', 40'HC)	36/72/108

MF380/MF400



T1400(Tiller)

Tilling Width (mm)	800
Blades Sets (set)	6
Tines Diameter (mm)	310
Tilling Depth (mm)	200
Tilling Speed (rpm)	290
Net Weight (kg)	35
Meas. (cm)	83x56x40
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	140/280/336



GC400 (Grass Cutter)

Cutting Width (mm)	1200
Cutting Height (mm)	20-60
Reciprocating Speed (t/min)	990
Net Weight (kg)	41.5
Meas. (cm)	Blade: 130x23x10
Gearbox & Shield	44x41x23
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	400/800/960



SIMADE
思 马 德

DB400 (Snow Pusher)

Shovel Snow Speed (km/h)	I:1.3 II: 3.1 III:4.5
Shovel Snow Width (mm)	920
Steering Angle	±25°
Net Weight (kg)	35.3
Meas. (cm)	96x36x19
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	456/912/1064



ST400 (Snow Blower)

Max Working Width (cm)	72/102
Net Weight (kg)	72cm: 62; 102cm: 75
Meas. (cm)	72cm: 82x61x62 102cm: 107x61x62
Type Of Packing	Kraft Carton With Pallet
QTY. (20', 40', 40'HC)	70cm: 75/156/208 102cm: 57/123/162

SW400 (Sweeper)

Rotary Cylindrical Diameter (mm)	500
Rotary Cylindrical Width (mm)	1100
Steering Angle	±25°
Net Weight (kg)	83.9
Meas. (cm)	121x77x70.5
Type Of Packing	Kraft Carton With Pallet
QTY. (20', 40', 40'HC)	39/84/84

MF380/MF400



CONNECTING PARTS
FOR WHEEL



BALANCING WEIGHT



QUICK COUPLING



TRANSPORT WHEEL
FOR TI400



MW500



PL400



SP400



SPS400



SGC400(Flail Mower)

Working Width	700 mm
Blade Diameter	320 mm
Rotate Speed	3200 r/min
Adjust Height	0~90mm
N.W./G.W.	101/111 kg
Meas.	92x89x67,5 cm
Type Of Packinglet	Wooden box with pallet
20'GP/40'GP/40'HQ	36/78 /104 pcs
Certification	CE



ML20(Roller Water Pump)

Max. discharge rate	10.800 l/h
Max. discharge head	20 m
Max. submersion depth	5 m
Max. particle size	2 mm
Max. water temperature	35 °C
Connection	1" + 3/4"
N.W./G.W.	9.2/10.5 kg
Meas.	Pump: 22x22x18.5 cm
Accessory	43x37x20.5 cm
Type Of Packing	Color box
20'GP/40'GP/40'HQ	Pump: 2860 / 5720 / 6760 pcs
	Accessory: 857 / 1781 / 1944 pcs



ML30(Roller Water Pump)

Max. discharge rate	16.800 l/h
Max. discharge head	30 m
Max. submersion depth	5 m
Max. particle size	2 mm
Max. water temperature	35 °C
Connection	1 1/2" IT
N.W./G.W.	19.5/20.5 kg
Meas.	Pump: 30x26x26 cm
Accessory	43x37x16.5 cm
Type Of Packing	Color box
20'GP/40'GP/40'HQ	Pump: 1312/2624/3280 pcs
	Accessory: 702/1458 /1781 pcs

MF360

Engine:	single cylinder, air-cooled OHV, 4-Stroke, Horizontal
Max Output	6.5/3600 HP/rpm
Fuel Tank Capacity	3.6L
Engine Oil Capacity	0.6L
Gear Shifting	-2, -1.0, 1, 2
PTO Speed, Two Direction	920/675 rpm
Tire Size	4.00-8(420mm)
Distance Between 2 Wheels	400 mm
Clutch Type	By Friction
Adjustable Handle	In height and sideways
N.W./G.W.	57/64 kg
Meas.	87x46x82.5 cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	64 / 130 / 201
Certification	CE

MF360

Multifunction Machine



SW360 (Sweeper)

Rotary Cylindrical Diameter	320 mm
Rotary Cylindrical Width	900 mm
Rotary Cylindrical Speed	400 rpm
Adjust Height	0~50 mm
Steering Angle	± 25°
N.W./G.W.	Sweeper Only: 38.1/42.4 kg With Dust Box: 51/56 kg
Meas.	Sweeper Only: 97x52x38cm With Dust Box: 97x70x38cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	Sweeper Only: 120/240/280 With Dust Box: 105/213/249
Certification	CE



TI360 (Cultivator)

Tilling Width	560/420 mm
Blade Sets	6 set
Tines Diameter	310 mm
Tilling Depth	200 mm
Tilling Speed	320 rpm
N.W./G.W.	28.1/31 kg
Meas.	58x55x37.5 cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	240 / 480 / 560 units
Certification	CE



GC360 (Grass Cutter)

Cutting Width	970 mm
Cutting Height	20-60 mm
Reciprocating Speed	920 tmin
N.W./G.W.	30/32.9 kg
Meas.	Blade: 100x21.5x9 cm Gearbox & Shield: 43x37x20.5 cm
Type of Packing	Kraft Cartont
QTY.(20GP/40GP/40HQ)	575/ 1150/ 1250
Certification	CE



DB360 (Snow Pusher)

Shovel Snow Speed	Low: 1.5 km/h Fast: 3.7 km/h
Shovel Snow Width	850 mm
Adjust Height	0~50 mm
N.W./G.W.	22.5/26 kg
Meas.	92.5x46.5x20.5 cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	330 / 682 / 806
Certification	CE



ST360 (Snow Blower)

Max Throwing Distance	6 m
Max Working Width	56 cm
Max Working Thickness	51 cm
Chute Rotating Angle	270°
N.W./G.W.	35.2/38.5 kg
Meas.	63x51x57.5 cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	160 / 328 / 328
Certification	CE



SP360 (Plow)

Metal Wheels Diameter	420 mm
Distance Between	Max:700 mm
Two Wheels Outside	Min:370 mm
Ridger Width	300 mm
Net Weight	22.5/24.7 kg
Meas.	49x44.5x34.5 cm
Type of Packing	Kraft Carton
QTY.(20GP/40GP/40HQ)	366 / 672 / 784



SC2000

Grass Burning Machine


Power	230V/50Hz 2000W
Temperature (°C)	650
Blast Capacity (L)	500
Meas. (cm)	Inner box: 106.5x21x7.5 Outer Carton: 108.5x41.5x44.5/10pcs
QTY(20GP/40GP/40HQ)	1400/2800/3330
Certification	GS,CE,EMC

SC2000S

Grass Burning Machine

Power	230V/50Hz 2000W
Temperature (°C)	650
Blast Capacity (L)	500
Meas. (cm)	Inner box: 50.5×18×7 Outer Carton: 52x39x38.5/10pcs
QTY(20GP/40GP/40HQ)	3150/6300/7560

Optional Accessories

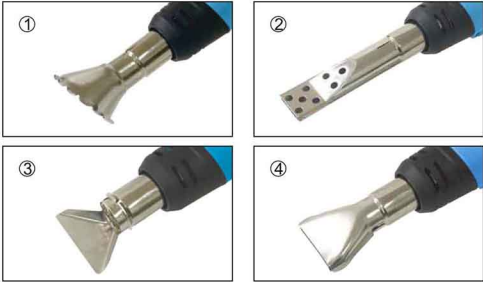

DH2000

Ignition Device

Power	230V/50Hz 2000W
Temperature (°C)	650
Blast Capacity (L)	500
Meas. (cm)	Inner box: 41×20.5x8.5 Outer Carton: 45x42.5x43.5/10pcs
QTY(20GP/40GP/40HQ)	3250/6750/8100
Certification	GS,CE,EMC

DH2000D

Ignition Device

Battery Type	36V, 2000 mAh, Lithium Battery
Power	36V, 72Wh
Charge Time	2 h
Working time	90 secs. 7 times
Temperature(°C)	650
Blast Capacity(L)	500



www.simade.biz

T10XE

Power Tiller



Power	Asynchronous induction machine, 230V/50Hz,800W, 2800rpm
Tilling Width	250 mm
Tilling Blade Diameter	205 mm
Tilling Depth	120 rpm
Tine Speed	110 rpm
Blade Sets	4 sets
Gear Shifting	0,1
N.W./ G.W.	11.9/14.3 kg
Meas.	32x32x52 cm
20GP/40GP/40HQ	504/1008/1260

T20XE-2

Power Tiller



Power	230V/50Hz,2000W, 2800rpm
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	165 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W./ G.W.	29.8/33.4 kg
Meas.	66x41x51 cm
20GP/40GP/40HQ	192/400/500 pcs
Certification	CE

WT450D

Power Tiller



Battery Type	48V,10Ah,Lithium Battery
Power	48V, 600W,2800rpm
Full Charge Time	8 h
Working Time	1 h
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	165 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W./ G.W.	32.3/36 kg
Meas.	66x41x58 cm
20GP/40GP/40HQ	194/395/400 pcs
Patent	201720695573.X

WT450E

Power Tiller



Power	230V/50Hz,2000W, 2800rpm
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	165 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W./ G.W.	29.8/33.4 kg
Meas.	66x41x51 cm
20GP/40GP/40HQ	192/400/500 pcs



www.simade.biz

T10X

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 2-stroke, 1.25KW, 6500rpm
Displacement	42.7 cc
Fuel Tank Capacity	1.2 L
Two Cycle Oil/Gasoline Mixing Ratio	1:30
Tilling Width	300 mm
Tilling Blade Diameter	200 mm
Tilling Depth	120 mm
Tine Speed	320 rpm
Blade Sets	4 sets
Gear Shifting	0,1
N.W. /l G.w.	11.2/13 kg
Meas.	32x32x52 cm
Package Type	Kraft carton
20GP/40GP/40HQ	504/100811260 pcs

Engine Type	Single cylinder, air-cooled,OHV, 4-stroke, Horizontal
Max Power	3.0HP/3600 rpm
Displacement	87 cc
Fuel Tank Capacity	1.6 L
Engine Oil Capacity	0.4 L
Tiling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	180 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W./ G.W.	30/34 kg
Meas.	66x41x58 cm
Package Type	Kraft carton
20GP/40GP/40HQ	194/3951400 pcs
Certification	CE

T20X-3

Gasoline Tiller



WT450

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	3.0HP/3600 rpm
Displacement	87 cc
Fuel Tank Capacity	1.6 L
Engine Oil Capacity	0.4 L
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	180 rpm
Blade Sets	4 sets
Gear Shifting	0,1T
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	30/34 kg
Meas.	66x41x58 cm
Package Type	Kraft carton
20GP/40GP140HQ	194/395/400 pcs

WT450R

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	3.0HP/3600 rpm
Displacement	87 cc
Fuel Tank Capacity	1.6 L
Engine Oil Capacity	0.4 L
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	180/100 rpm
Blade Sets	4 sets
Gear Shifting	-1,0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	33/37 kg
Meas.	66x41x58 cm
Package Type	Kraft carton
20GP/40GP140HQ	194/395/400 pcs

Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	4.5HP/3600 rpm
Displacement	149 cc
Fuel Tank Capacity	0.8 L
Engine Oil Capacity	0.45 L
Tilling Width	450-650 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	120 rpm
Blade Sets	6 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	33/35.5 kg
Meas.	53x49x59 cm
Package Type	Kraft carton
20GP/40GP140HQ	132/276/368 pcs

WT360-2

Gasoline Tiller



RST360-1

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	3.5HP/3600 rpm
Displacement	132 cc
Fuel Tank Capacity	1 L
Engine Oil Capacity	0.4 L
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	120 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	31/33.5 kg
Meas.	53x49x59 cm
Package Type	Kraft carton
20GP/40GP140HQ	170/365/368 pcs

RST360-2

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	4.5HP/3600 rpm
Displacement	149 cc
Fuel Tank Capacity	0.8L
Engine Oil Capacity	0.45 L
Tilling Width	450-650 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	120 rpm
Blade Sets	6 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	33/35.5 kg
Meas.	53x49x59 cm
Package Type	Kraft carton
20GP/40GP140HQ	132/276/368 pcs

WT360-1

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	3.5HP/3600 rpm
Displacement	132 cc
Fuel Tank Capacity	1.0 L
Engine Oil Capacity	0.4 L
Tilling Width	450 mm
Tilling Blade Diameter	260 mm
Tilling Depth	150 mm
Tine Speed	120 rpm
Blade Sets	4 sets
Gear Shifting	0,1
Clutch	Tensioner and Belt
Adjustable Handle	In height
N.W.1 G.W.	31/33.5 kg
Meas.	53x49x56 cm
Package Type	Kraft carton
20GP/40GP140HQ	170/365/368 pcs

T40X-3

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	6.5HP/3600 rpm
Displacement	196 cc
Fuel Tank Capacity	3.6 L
Engine Oil Capacity	0.6 L
Tilling Width	500-720 mm
Tilling Blade Diameter	330 mm
Tilling Depth	200 mm
Tine Speed	90/165/125 rpm
Blade Sets	6 sets
Gear Shifting	-1, 0, 1, 2
Clutch	Tensioner and Belt
Adjustable Handle	In height and sideways
N.W./ G.W.	59/62.4 kg
Meas.	64.5x50x75.5 cm
Package Type	Kraft carton
20GP/40GP/40HQ	120/246/246 pcs
Certification	CE

T40X-5

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	6.5HP/3600 rpm
Displacement	196 cc
Fuel Tank Capacity	3.6 L
Engine Oil Capacity	0.6 L
Tilling Width	500-720 mm
Tilling Blade Diameter	330 mm
Tilling Depth	200 mm
Tine Speed	165 rpm
Blade Sets	6 sets
Gear Shifting	0, 1
Clutch	Tensioner and Belt
Adjustable Handle	In height and sideways
N.W./ G.W.	56/59.4 kg
Meas.	64.5x50x75.5 cm
Package Type	Kraft carton
20GP/40GP/40HQ	120/246/246 pcs
Certification	CE



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	6.5HP/3600 rpm
Displacement	196 cc
Fuel Tank Capacity	3.6 L
Engine Oil Capacity	0.6 L
Tilling Width	460-680 mm
Tilling Blade Diameter	330 mm
Tilling Depth	200 mm
Tine Speed	70/156/125 rpm
Blade Sets	6 sets
Gear Shifting	-1, 0, 1, 2
Clutch	Tensioner and Belt
Adjustable Handle	In height and sideways
N.W./ G.W.	75.5/79 kg
Meas.	73.5x51.5x75 cm
Package Type	Kraft carton
20GP/40GP/40HQ	99/198/198 pcs

T50

Gasoline Tiller



	WT550	WT550R
Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal	Single cylinder, air-cooled, OHV, 4-stroke, Double Shafts, Horizontal
Max Power	6.5HP/3600 rpm	5.5HP/3600 rpm
Displacement	163 cc	163 cc
Fuel Tank Capacity	3.6 L	3.6 L
Engine Oil Capacity	0.5 L	0.5 L
Tilling Width	300-560 mm	300-560 mm
Tilling Blade Diameter	330 mm	330 mm
Tilling Depth	200 mm	200 mm
Tine Speed	170 rpm	170/60 rpm
Blade Sets	4 sets	4 sets
Gear Shifting	0, 1	-1, 0, 1
Clutch	Tensioner and Belt	Tensioner and Belt
Adjustable Handle	In height	In height
N.W./ G.W.	49.8/52.81 kg	51/54 kg
Meas.	57x42x67.5 cm	57x42x67.5 cm
Package Type	Kraft carton	Kraft carton
20GP/40GP/40HQ	156/324/324 pcs	156/324/324 pcs
Certification	CE	-

T50-2

Gasoline Tiller



Engine Type	Single cylinder, air-cooled, OHV, 4-stroke, Horizontal
Max Power	6.5HP, 3600rpm
Displacement	196 cc
Fuel Tank Capacity	3.6 L
Engine Oil Capacity	0.6 L
Tilling Width	480-720 mm
Tilling Blade Diameter	330 mm
Tilling Depth	200 mm
Tine Speed	70/156/125 rpm
Blade Sets	6 sets
Gear Shifting	-1, 0, 1, 2
Clutch	Tensioner and Belt
Adjustable Handle	In height and sideways
N.W. / G.W.	73/76 kg
Meas.	73.5x51.5x75 cm
Package Type	Kraft carton
20'GP/40'GP/40'HQ	99/198/198 pcs

Shovel

UDB200	
Shovel Snow Width	600 mm
Shovel Height	350 mm
Steering Angle	±22°
N.W. / G.W.	18/20 kg
Meas.	66x35x25 cm
Package Type	Kraft Carton
20GP/40GP/40HQ	480/99011105 pcs



Roller Water Pump



ML20	
Max. discharge rate	10.800 l/h
Max. discharge head	20 m
Max. submersion depth	5 m
Max. particle size	2 mm
Max. water temperature	35 °C
Connection	1" + 3/4"
N.W./G.W.	8.8/9.2 kg
Meas.	Pump: 22x22x18.5 cm
Accessory	43x37x20.5 cm
Type Of Packing	Color box
20' GP/40' GP/40' HQ	Pump: 2860 / 5720 / 6760 pcs
	Accessory: 857 / 1781 / 1944 pcs



ML30	
Max. discharge rate	16.800 l/h
Max. discharge head	30 m
Max. submersion depth	5 m
Max. particle size	2 mm
Max. water temperature	35 °C
Connection	1 1/2" IT
N.W./G.W.	19.5/20.5 kg
Meas.	Pump: 30x26x26 cm
Accessory	43x37x16.5 cm
Type Of Packing	Color box
20' GP/40' GP/40' HQ	Pump: 1312/2624/3280 pcs
	Accessory: 702/1458 /1781 pcs

Grass Cutter



www.simade.biz

Cutting Width	300/12 mm/inch
Cutting Height	15-46 mm
Collect Capacity	12L
N.W./ G.W.	7/8.5 kg
Meas.	48x38x23 cm
Package Type	Kraft Carton
20GP/40GP/40HQ	648/1296/1584 pcs

UGC300

Grass Cutter



Grass Cutter

UGC350

Grass Cutter



Cutting Width	350/14 mm/inch
Cutting Height	15-46 mm
Collect Capacity	15L
N.W./ G.W.	7.5/9 kg
Meas.	51x41x23 cm
Package Type	Kraft Carton
20GP/40GP/40HQ	604/1244/1375 pcs

	UGC400	UGC500
Cutting Width	400/16 mm/inch	500/20 mm/inch
Cutting Height	34-64 mm	34-64 mm
Collect Capacity	23L	28L
N.W./ G.W.	11.9/13.3 KG	13.4/15.2 KG
Meas.	59x46.5x26 cm	69x46.5x26 cm
QTY.(20GP/40GP/40HQ)	368/760/950	320/672/840



Optional Accessories

Model No.	Applicable models
-----------	-------------------

SP250A



T50

SP250B


 T40X-3
 T40X-5
 WT550
 WT550R
 WT800
 WT800R

SP360A



MF360

PL360A




T50

PL360B



MF360

TH360A



T50

Model No.	Applicable models
-----------	-------------------

TH360B



MF360

MW300


 WT550
 WT550R
 WT800
 WT800R

MW330


 T40X-3
 T40X-5
 T50
 T50-2

MW420



MF360

ARW325


 T40X-3
 T40X-5
 T50
 T50-2