

Product Datasheet model uvex apache spec 9112265

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product characteristics

- spectacle especially developed for military purposes
- robust and lightweight safety spectacles with slim side arm geometry
- suitable for prescription spectacle wearers due to the RX insert
- non-slip, soft nose pad provides a perfect fit
- easy lens replacement possible
- high-performance polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- tested in accordance with STANAG 2920/4296 and MIL-PRF-32432A
- Set includes:
 - spectacle with clear UV filter
 - replacement lens UV filter orange 70 %
 - replacement lens sunglare protection filter grey 14 %
 - uvex eyewear cord 9959 004
 - uvex microfibre cloth 9972 130
 - uvex eyewear case 9954 500

2. Technical details Body

Frame

Material	PA
Colour	black

Nose pad

Material	PC/TPE
Colour	transparent

Rivet

Material	brass, nickel-plated
----------	----------------------

Temple

Material	PA
Colour	black

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

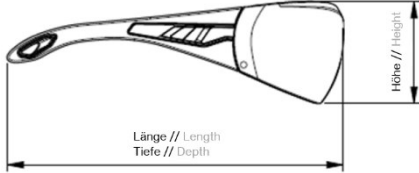


3. Technical details Lens

Material	PC
Thickness	2.2 mm at PD
Coating	uvex supravision excellence
Colour	clear / orange / grey 14 %
UV protection	UV400
Marking clear lens	
Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	
Marking orange 70 % lens	
Filter	2-1.4 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

Marking grey 14 % lens	
Filter	5-3.1 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	30g	
Dimensions (L x W x H) in approx. mm	  picture only for reference	
	173 x 150 x 53	
	Packing unit 1	Packing unit 2
EAN Code	4031101661407	4031101877747
Quantity in pcs.	1	12
Dimensions (L x W x H) in approx. mm	 picture only for reference	
	90 x 190 x 95	320 x 230 x 200
Net weight in approx. g	101	1,212
Gross weight in approx. g	112	1,484
Country of Origin	Germany	

5. Miscellaneous

Standards	EN 166 + EN 170 + EN 172 + STANAG 2920/4296 + MIL-PRF-32432A
PPE Category	Category II