


FRAME FOOT™ MINI


FRAME FOOT MINI

Anti-vibration frames designed for non-invasive installation of outdoor units on the ground or flat roofs with a maximum slope of up to 5%.




FF-COMPACT

Dimensions:
Length: 450–755 mm
Width: 115–375 mm
Height: 300–323 mm
Load capacity: 300 kg/unit

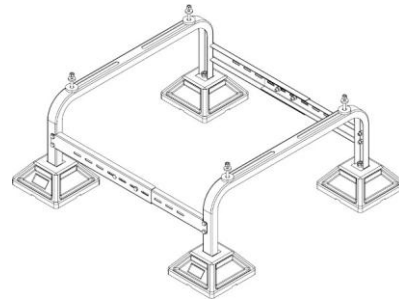


FF-755

Dimensions:
Length: 450–755 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 360 kg/unit

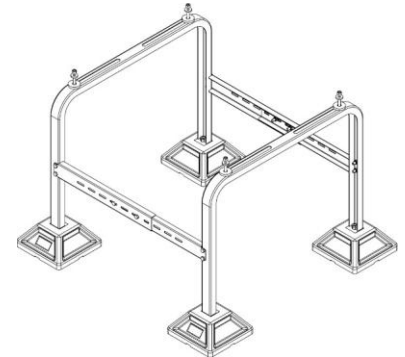


FF-755 DTU

Dimensions:
Length: 450–755 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 360 kg/unit

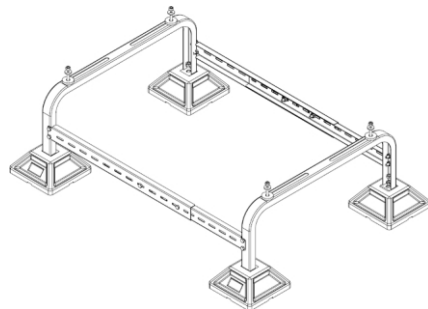


FF-1250-MONO

Dimensions:
Length: 690–1250 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 450 kg/unit

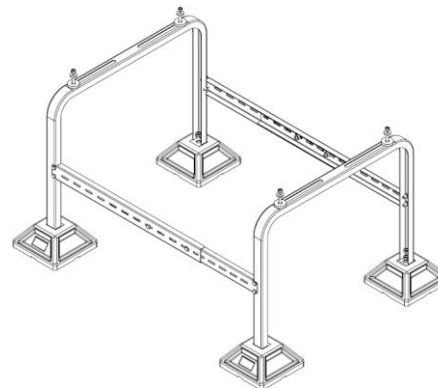


FF-1250-MONO DTU

Dimensions:
Length: 690–1250 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 450 kg/unit

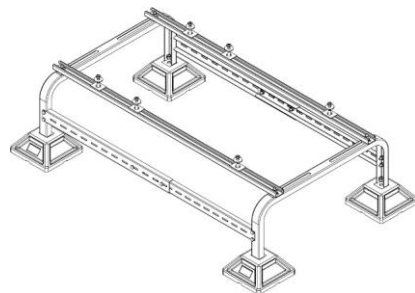


FF-1200-MONO-3D

Dimensions:
Length: 690–1130 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 360 kg/unit

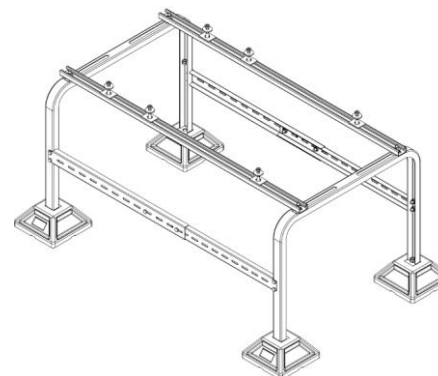

FF-1200-MONO-3D DTU

Dimensions:
Length: 690–1130 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 360 kg/unit

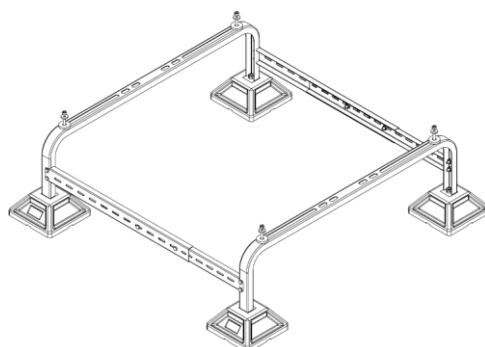


FF-1250-VR

Dimensions:
Length: 690–1250 mm
Width: 120–820 mm
Height: 330–370 mm
Load capacity: 450 kg/unit

FRAME FOOT™


FRAME FOOT

Modular frame kits for large units. Designed for non-invasive installation on flat roofs and on the ground. Individually configured for any unit dimensions.

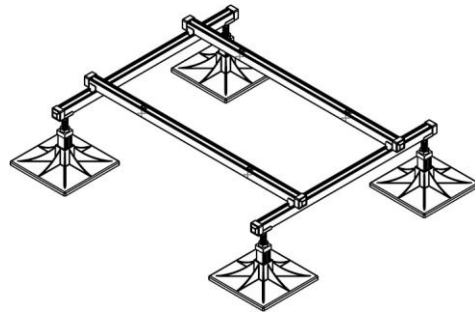


FF4

Dimensions*:
Length: max. 1121/912** mm
Width: max. 912/1121** mm
Height: 295-415 mm
Load capacity: 500 (500 kg/m²)

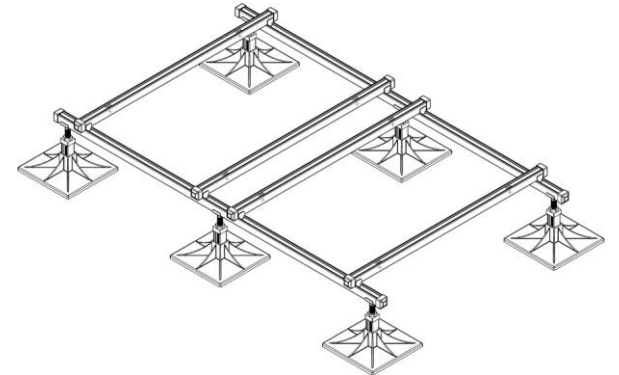


FF6

Dimensions*:
Length: max. 1808 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 1040 (520 kg/m²)

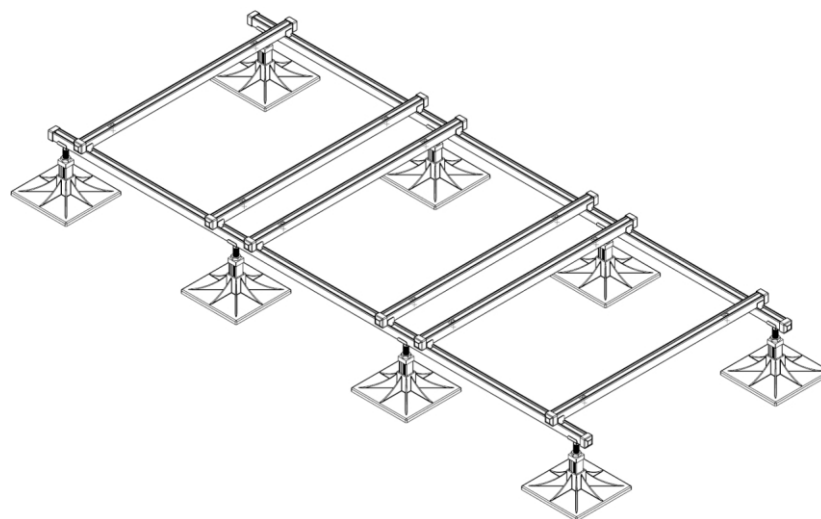


FF8

Dimensions*:
Length: max. 2757 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 1620 (540 kg/m²)

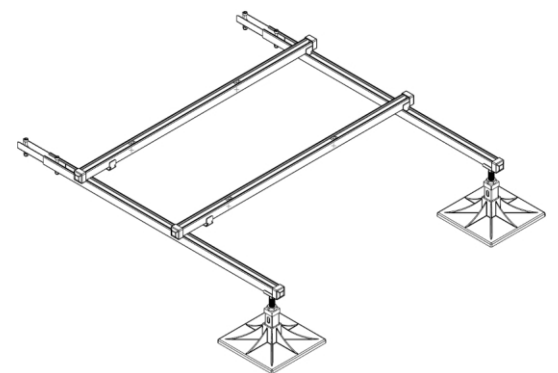


FF2-EXT

Dimensions*:
Length: max. 912 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 500 (500 kg/m²)




HF-600

Dimensions*:
Width: max 600 mm
Height: 240-415 mm
Load capacity: 500 (500 kg/m²)

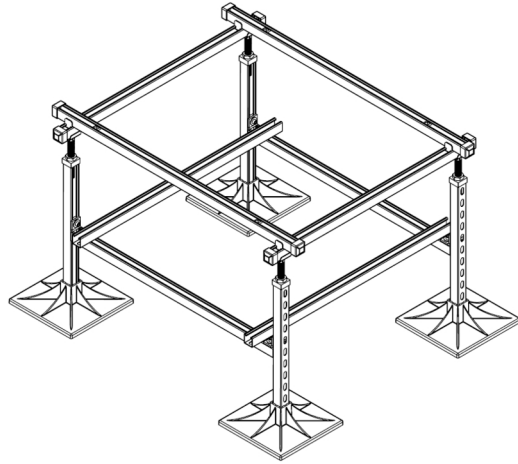


FF4-DTU-R

Dimensions*:
 Length: max. 1121/912** mm
 Width: max. 912/1121** mm
 Height: 745-865 mm
 Load capacity: 500 (500 kg/m²)

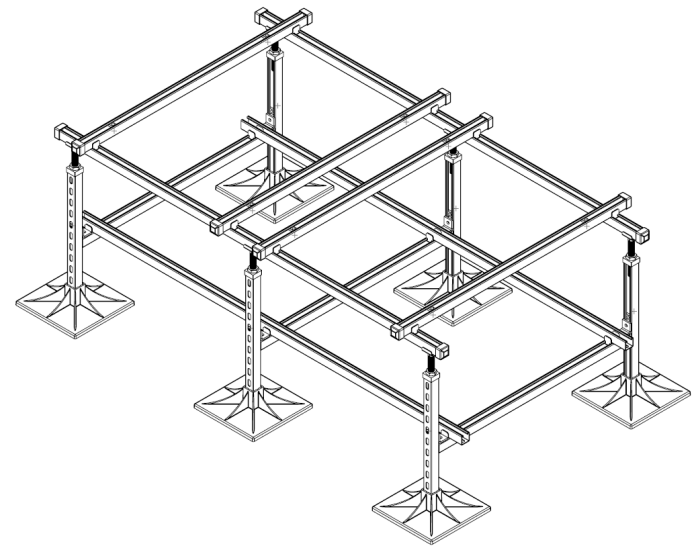


FF6-DTU-R

Dimensions*:
 Length: max. 1808 mm
 Width: max. 1121 mm
 Height: 745-865 mm
 Load capacity: 1040 (520 kg/m²)

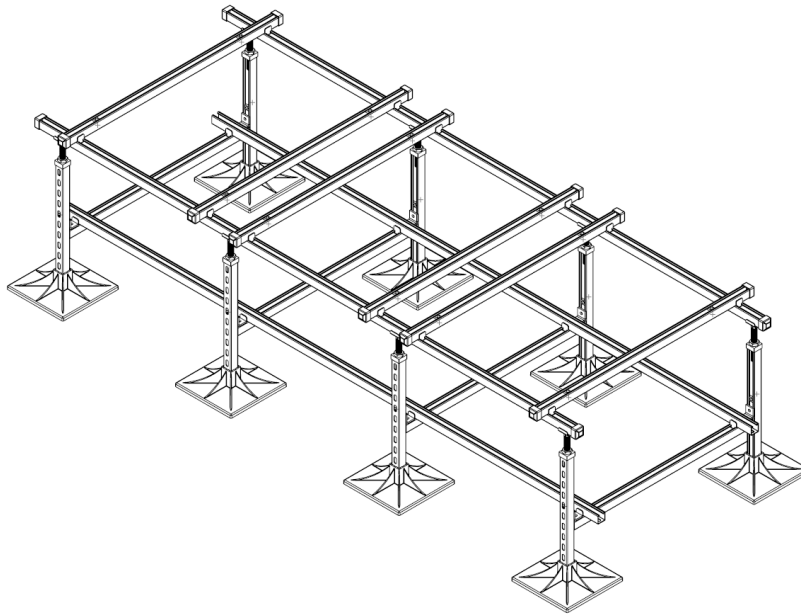

FF8-DTU-R

Dimensions*:
 Length: max. 2757 mm
 Width: max. 1121 mm
 Height: 745-865 mm
 Load capacity: 1620 (540 kg/m²)

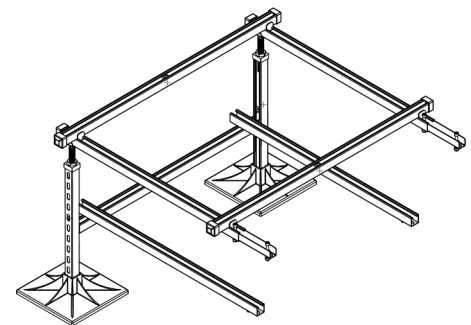


FF2-EXT-DTU-R

Dimensions*:
 Length: max. 912 mm
 Width: max. 1121 mm
 Height: 745-865 mm
 Load capacity: 500 (500 kg/m²)


RUBBER BLOCK

RUBBER BLOCK
Effectively dampen vibrations emitted by equipment.
Resistant to weather conditions and chemicals.
Ensure stability of equipment and safety of its use.
Designed for installation of: refrigeration equipment, ventilation equipment, heat pumps and installation lines.




RB250/130

Length: 250 mm
Width: 130 mm
Height: 95 mm
Load capacity: 120 kg/unit




RB400/130

Length: 400 mm
Width: 130 mm
Height: 95 mm
Load capacity: 180 kg/unit




RB600/130

Length: 600 mm
Width: 130 mm
Height: 95 mm
Load capacity: 300 kg/unit

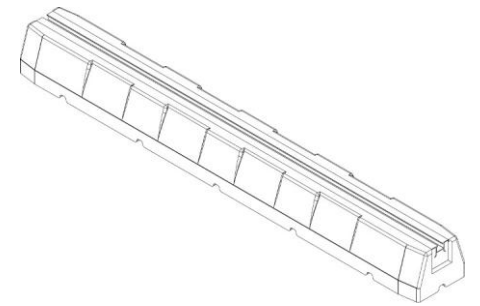


RB1000/130

Length: 1000 mm
Width: 130 mm
Height: 95 mm
Load capacity: 350 kg/unit




RB250/180

Length: 250 mm
Width: 180 mm
Height: 95 mm
Load capacity: 120 kg/unit




RB400/180

Length: 400 mm
Width: 180 mm
Height: 95 mm
Load capacity: 180 kg/unit

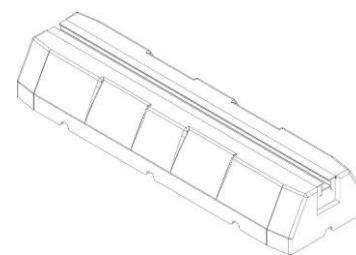


RB600/180

Length: 600 mm
Width: 180 mm
Height: 95 mm
Load capacity: 300 kg/unit

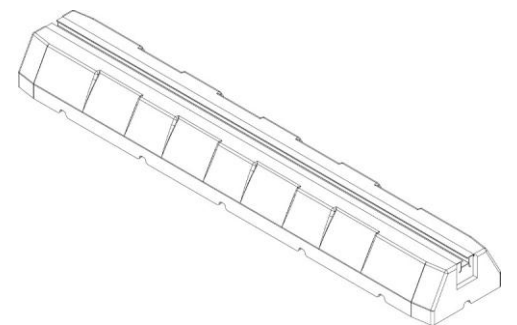


RB1000/180

Length: 1000 mm
Width: 180 mm
Height: 95 mm
Load capacity: 350 kg/unit




RISER600/180

Length: 600 mm
Width: 190 mm
Height: 130 mm
Load capacity: 300 kg/unit

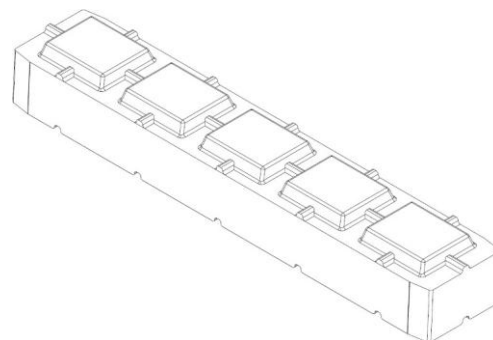


RISER1000/180

Length: 1000 mm
Width: 190 mm
Height: 130 mm
Load capacity: 350 kg/unit

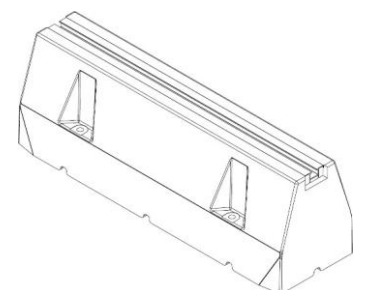


RB600/180/H200

Length: 600 mm
Width: 180 mm
Height: 200 mm
Load capacity: 350 kg/unit




RB250/MINI

Length: 250 mm
Width: 130 mm
Height: 50 mm
Load capacity: 120 kg/unit




RB400/MINI

Length: 400 mm
Width: 130 mm
Height: 50 mm
Load capacity: 180 kg/unit



RB500/MINI

Length: 600 mm
Width: 130 mm
Height: 50 mm
Load capacity: 250 kg/unit

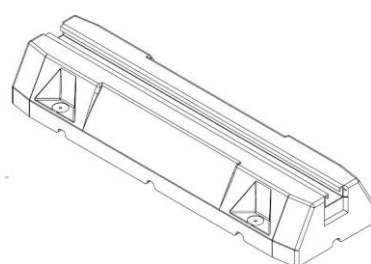

RB600/180H

Length: 600 mm
Width: 180 mm
Height: 95 mm
Load capacity: 300 kg/unit