


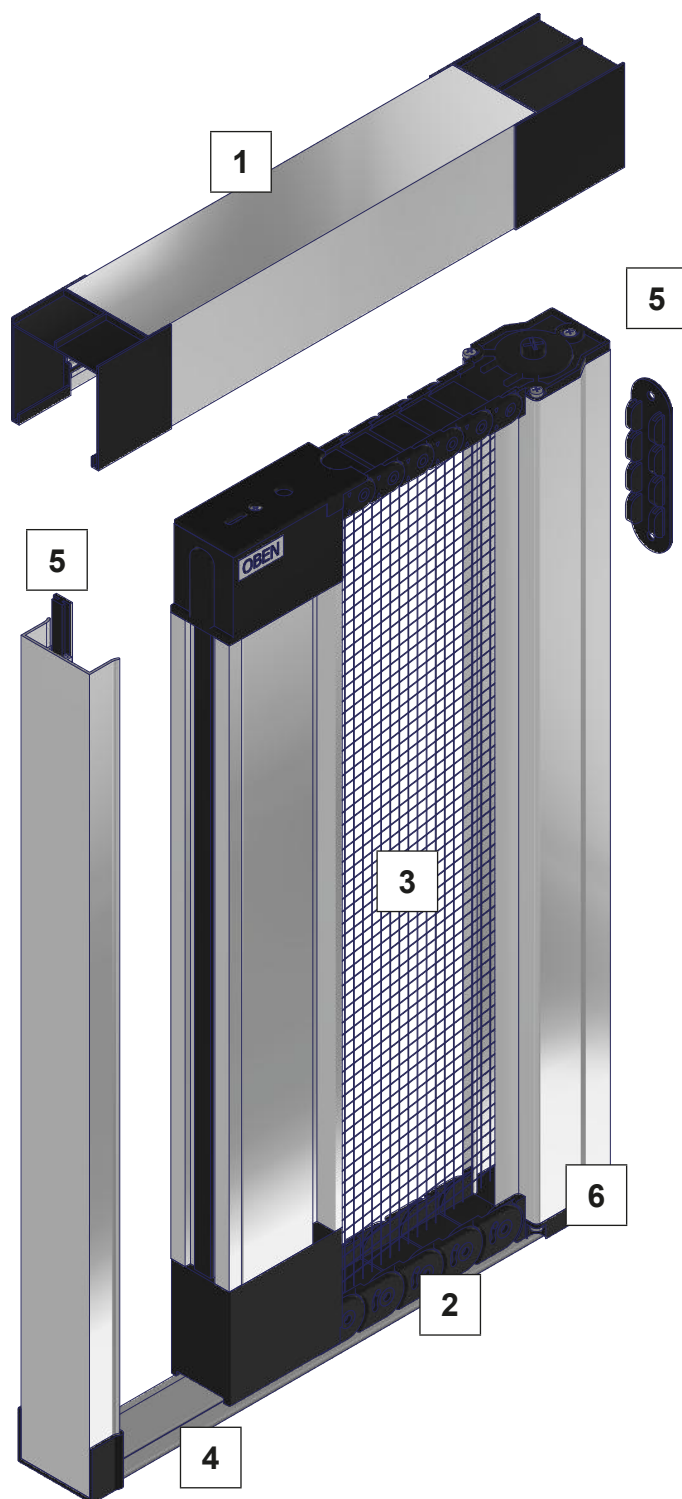

1.
Our extruded aluminum profiles are made from alloy EN AW 6060 T66. The surface is available powder-coated or anodized.

2.
The upper and lower caterpillar chain ensure reliable and long-lasting operation of the roller door.

3.
Our roller door is delivered with a black transparent mesh.

4.
Accessible floor guide rail for the disabled with a height of 5 mm.
The roller door is standardly delivered with a PVC floor guide.

Optionally, an aluminum or aluminum wedge floor guide is available.

5.
Easy assembly through mounting clips.
The roller door is standardly delivered with a magnetic closure.

Optionally, a snap closure is also available, which we recommend for widths over 1400 mm.

6.
Easy re-tensioning of the mesh via a quick-release fastener at the bottom of the cassette.