

# BXP-350

## Future-Proof Your Signage Needs

### Premium 8K Digital Signage Player

Immerse yourself in unparalleled clarity with the BXP-350's fluid 8K/60 FPS video playback, where each frame on your digital signage is brought to life with razor-sharp, visually captivating detail. Designed for the demanding needs of modern digital signage, the BXP-350 includes an extensive range of I/O ports for exceptional flexibility in any setting. Its advanced, future-proof technologies seamlessly adapt to your requirements, ensuring flawless operation around the clock—all in one sleek package.



**8K Video Support**



**8K + 4K Dual Output**



**8K/60 FPS Playback**



**4K Video In**



**Extensive I/O Ports**



**4G LTE Ready**




**WiFi 6**



**Android 12**



# BXP-350 Premium 8K Digital Signage Player

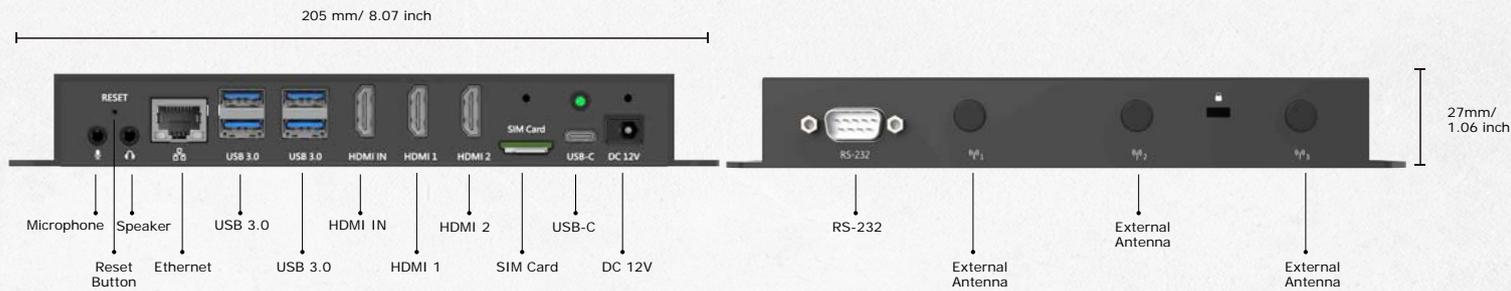

<b>System</b>	<b>Operating System</b>	Android 12 / <del>Android 14 (Planning)</del>
	<b>CPU</b>	ARM Quad-Core A76 + Quad-Core A55, 64-bit 2.4GHz
	<b>NPU</b>	6 TOPs @ Int8
	<b>GPU</b>	Mali-G610 MC4
	<b>Memory</b>	8GB
	<b>Storage</b>	128GB <del>eMMC</del>
	<b>Watchdog</b>	Support
<b>Media</b>	<b>Video Decoding</b>	8K@60fps H.265, VP9, AVS2, 8K@30fps H.264
	<b>Video Encoding</b>	8K@30fps H.264/H.265
<b>Video Output</b>	<b>Video</b>	Support WMV, AVI, FLV, RM, RMVB, MPEG, TS, MP4.
	<b>Photo</b>	Support BMP, JPEG, PNG, GIF
<b>I/O Interface</b>	<b>Ethernet</b>	10/100/1000M
	<b>USB 3.0</b>	4 x USB 3.0
	<b>USB-C</b>	1 x USB-C for ADB/OTG
	<b>Line OUT</b>	1 x Speaker (4 TRRS)
	<b>Line IN</b>	1 x Microphone
	<b>HDMI output</b>	1 x HDMI 2.1 (7680 x 4320 8K@60fps) 1 x HDMI 2.0 (4K@60fps)
	<b>HDMI input</b>	1 x HDMIC-IN (4K@60fps)
	<b>External Antenna</b>	2 x 2dB Antenna / 1 x LTE Antenna (optional)
	<b>RTC</b>	<b>RTC Battery</b>
<b>Button</b>	<b>Reset Button</b>	1 x Reset Button
<b>OS Upgrade</b>	<b>OS Upgrade</b>	Upgrade by OTA and USB adapter
<b>Wireless</b>	<b>WIFI</b>	WLAN 802.11 a/b/g/n/ac/ax (Wi-Fi 6) <del>(optional)</del>
<b>Expansion</b>	<b>M.2</b>	1 x M.2, Support 4G
	<b>COM port</b>	1 x RS232 DB-9 connector (Tx & Rx)
<b>Power</b>	<b>Power Adapter</b>	DC-12V/3A
<b>Mechanical</b>	<b>Dimension (WxDxH)</b>	205 x 120 x 27 (mm)
	<b>Material</b>	Metal
	<b>Mounting</b>	Wall mount
	<b>Weight</b>	750g
<b>Environment</b>	<b>Operating temperature</b>	-10°C to 60°C
	<b>Storage temperature</b>	-40°C to 80°C
<b>Certification</b>	<b>Certification</b>	CE/UKCA/FCC/RoHS