E-COM GIFT BAG

ZERO WASTE

4-6 Color In-line Flexo Printing

Full Servo Control

TECHNICAL SPECIFICATIONS	S	L
Paper	40 - 100 gr/m ²	
Maximum Speed	200 Pcs/min	
Maximum Paper Width	1100 mm	
Gusset Width (Open)	0 - 160 mm	
Maximum Roll Diameter	1200 mm	
Adhesive Tape Width	25 mm	
Flap Length	40 mm	
Cutting Length	110 - 420 mm	160 - 780 mm
Mailer Width	55 - 350 mm	80 - 350 mm

Somtaş reserves the right for changing all machine specifications without prior notification.

Somtas
Social Media

SOMTAŞ
CONVERTING EQUIPMENT
Where Engineering Meets Paper

Adres: Akçaburgaz Mah. Ahmet Yesevi Cad.
No: 3 Zip Code: 34522
ESENYURT - İSTANBUL / TÜRKİYE
T: +90 (212) 886 32 22 (pbx)
F: +90 (212) 886 32 25
e: info@somtas.com

HIGHEST PERFORMANCE

SOMTAŞ
CONVERTING EQUIPMENT
Where Engineering Meets Paper

more than 30 years of experience

For Safe and Sustainable Shipping in E-Commerce

E-Commerce Mailer Machines

E-COM SERIES

E-COM 1

Our cutting-edge machine produces Ship&Return E-commerce mailers, designed for double-usage, with up to 200 pieces per minute.

4-6 Color In-line Flexo Printing

For more information

TECHNICAL SPECIFICATIONS	
Paper	80 - 120 gr/m²
Maximum Capacity	200 Pcs/min
Maximum Paper Width	1400 mm
Cutting Length	300 - 760 mm
Adhesive Tape Width	25 mm
Mailer Width	80 - 510 mm
Bottom Gluing	30 mm
Gusset Width (Open)	0 - 160 mm
Mailer Length	180 - 640 mm
Flap Length	50 mm (One Way) 90 mm (Ship & Return)
Flexo Printing (Optional)	4 / 6 Color
One Color Logo Printing (Optional)	70 x 200 mm

Somtaş reserves the right for changing all machine specifications without prior notification.

E-COM 2

The second layer is provided with a stable bubble pattern.

Be more efficient in production, save time and modernize the E-commerce production with the best partner, the E-Com 2 machine that can produce up to 500 pieces per minute.

4-6 Color In-line Flexo Printing

ZERO WASTE

For more information

TECHNICAL SPECIFICATIONS	
Inner and Outer Paper Weights	70 - 200 gr/m²
Maximum Capacity	500 Pcs/min (Double Line) 250 Pcs/min (Single Line)
Maximum Reel Width	1100 mm
Maximum Embossing Reel Width	1040 mm
Mailer Width	200 - 700 mm
Maximum Mailer Length (inc. Flap length)	550 mm (Double Line) 1100 mm (Single Line)
Adhesive Tape Width	20 mm
Flap Length	40 mm - 90 mm
Flexo Printing (Optional)	4 / 6 Color

Somtaş reserves the right for changing all machine specifications without prior notification.

E-COM BLOCK BOTTOM

The E-Com Block Bottom is an innovative machine designed with advanced engineering to produce up to 120 Ship&Return Block Bottom E-Commerce mailers per minute. With its robust structure and user-friendly interface, it enhances production efficiency and boosts the competitive edge of businesses.

4-6 Color In-line Flexo Printing

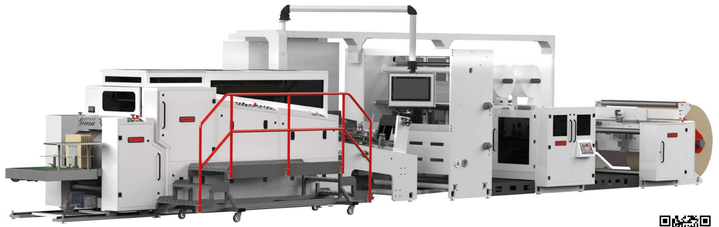

For more information

TECHNICAL SPECIFICATIONS	15-32 MODEL	18-46 MODEL
Paper	70 - 120 gr/m²	
Maximum Capacity	120 Pcs/min	
Mailer Width	150 - 320 mm	180 - 460 mm
Cutting Length	300 - 550 mm	360 - 780 mm
Bottom Width	80 - 170 mm	80 - 230 mm
Adhesive Tape Width	25 mm	
Flap Length	50 mm (One Way) 90 mm (Ship & Return)	
Flexo Printing (Optional)	4 / 6 Color	
One Color Logo Printing (Optional)	100 x 200 mm	

Somtaş reserves the right for changing all machine specifications without prior notification.