

climalink

HVAC INSTALLATION SOLUTIONS



Air Conditioning Installation Material

- Clima Bracket
- Clima Duct
- Clima Condensate Drainage Set
- Clima Copper Tube
- Clima Accessories

SIMPLER FASTER BETTER



www.climalink.cn

About Us

HARBIN CMEG CO.LTD. was founded in 2005. In order to make installation simpler, faster and better, we dedicate to the research, development, design, and manufacturing the Installation materials for mini-splits air conditioner, heat pump and HVACR equipments. Including condenser support & brackets, PVC lineset cover kits, insulated copper tubes.

We offer a wide range of unique products for various applications, and continually develop technologies to enhance product performance.

We create quality products, services and solutions that meet the expectations of our customers. Now our products are widely used in Europe, North America, and Australia with extremely high quality, perfect technic, and environment friendly materials.



No. 10 HuaShan Road, Xiang Fang Dist, Harbin, Hei Long Jiang, China.



+86 451 82387383 +86 13804575040




cristinwei@climalink.cn

Bolts Connected Bracket

Model	AU-450	AU-550
Loading(kg)	100	200
Thickness	A=450 mm B=350 mm C=700 mm 1.5 mm	A=550 mm B=450 mm C=850 mm 1.8 mm

Description

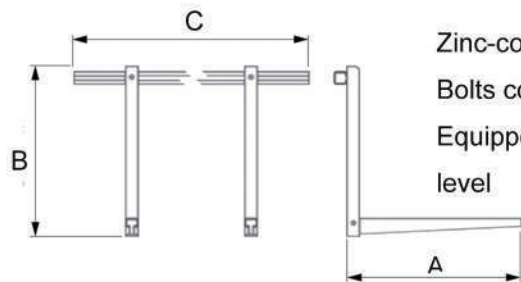

Zinc-coated steel with powder coating
Bolts connected with beam support
Equipped with rubber dampers and level

Zn Hot-dip Zinc-coated Steel



Accessories




AU-450



Bolts Connected Bracket

Model	HBF-400	HBF-450	HBF-550	HBF-600
Loading(kg)	100	100	200	200
Thickness	A=400 mm B=380 mm C=800 mm 1.5 mm	A=450 mm B=380 mm C=800 mm 1.5 mm	A=550 mm B=380 mm C=800 mm 2 mm	A=600 mm B=380 mm C=1000 mm 2 mm

Description

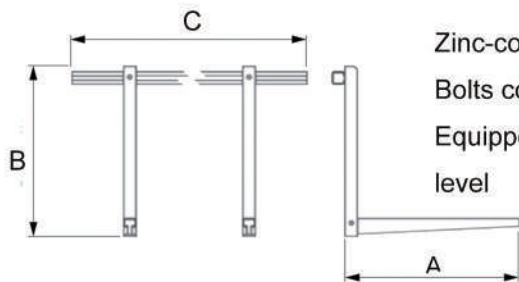

Zinc-coated steel with powder coating
Bolts connected with beam support
Equipped with rubber dampers and level

Zn Hot-dip Zinc-coated Steel






Accessories



HBF-450



Ground Bracket

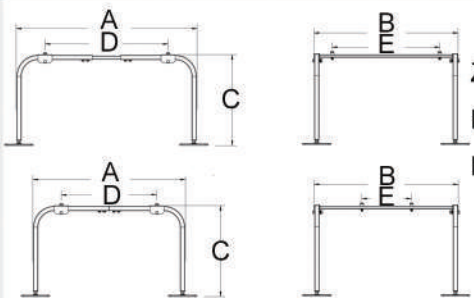Model	GF-620	
Loading(kg)	200	
Description	A=900-1200mm B=620mm C=320mm	D=550-850mm E=240-500mm Thickness=2 mm
	 <p>Zinc-coated steel with powder coating Heavy duty loading ability Equipped with rubber dampers</p>	<p>(Zn) Hot-dip Zinc-coated Steel</p> 
Accessories		




GF-620

Outdoor Units Guards

Model	BAC100	BAC110	BAC120
Loading(kg)	/	/	/
	A=1000mm B=500mm C=700mm	A=1100mm B=550mm C=800mm	A=1200mm B=650mm C=1100mm

Description

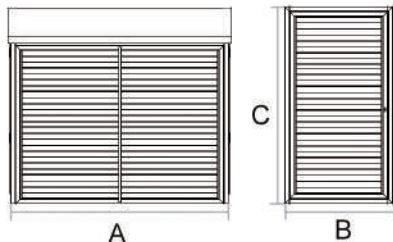

Aluminium material
Protect outdoor unit
Easy to install
Color White/Black/Gray




BAC110

Accessories



Lineset Cover Kits - KD Series

Straight Duct- KD



KD80 Kits

Model	A(mm)	B(mm)	C(m)	D(mm)
KD-8	77	54	2	/

Sizes:

KD-80(3").


Fittings:

A wide variety of fittings to accommodate your unique configuration.

Color:

White, Black, Gray, Red, Brown, also accept customization.


Flexible Joint- KR

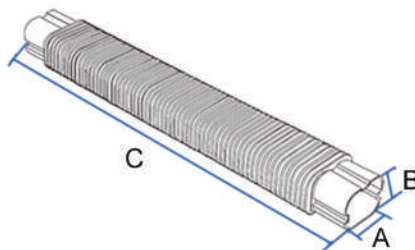

Model	A(mm)	B(mm)	C(mm)	D(mm)
KR-8	73	57	630	

Lineset Cover Kits - KD Series

Internal Cover- KI



KD80K Kits

Model	A(mm)	B(mm)	C(mm)	D(mm)
KI-8	77	54	/	/


Material:

Weather resistant, UV stabilized, and Flame retardant PVC.

Certification:

UL94-Horizontal Burning test,
ASTMG154-UV Resistance test,
ASTM D648-Deflection Temperature under Load test.


Plane Cover- KP



Model	A(mm)	B(mm)	C(mm)	D(mm)
KP-8	77	54	/	/


Lineset Cover Kits - KD Series

Wall Passage- KC




Model	A(mm)	B(mm)	C(mm)	D(mm)
KC-8	77	54	/	/

Cover Joint- KJ



Model	A(mm)	B(mm)	C(mm)	D(mm)
KJ-8	77	54	/	/

T Joint- KT



Model	A(mm)	B(mm)	C(mm)	D(mm)
KT-8	77	54	/	/



KD80 Kits

Sizes:

KD-80(3").

Fittings:


A wide variety of fittings to accommodate your unique configuration.

Color:

White, Black, Gray, Red, Brown, also accept customization.

Lineset Cover Kits - KD Series

End Cover- KWA



KD80K Kits

Material:


Weather resistant, UV stabilized, and Flame retardant PVC.

Certification:

UL94-Horizontal Burning test,
ASTMG154-UV Resistance test,
ASTM D648-Deflection Temperature under Load test.

Model	A(mm)	B(mm)	C(mm)	D(mm)
KWA-8	77	54	/	/

External Cover- KY



Model	A(mm)	B(mm)	C(mm)	D(mm)
KY-8	77	54	/	/

Cover Wall Elbow- KW



Model	A(mm)	B(mm)	C(mm)	D(mm)
KW-8	77	54	/	/

Spiralated Pipe Smooth Inside




DHS1622



Model	DHS1217	DHS1622	DHS1926	DHS2532	DHS3240	DHS3846	DHS5160	DHS7686	DHS102112	DHS126136	DHS152163
Specification	1/2"	5/8"	3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"	5"	6"
O.D.(mm)	17.5	22	26	32	40	46	60	86	112	136	163
I.D.(mm)	12.5	16	19	25.4	32	38	51	76	102	126	152
Thickness(mm)	2.5	3	3.5	3.5	4	4	4.5	5	5	5	5.5
M/Rolls	20	20	20	20	20	20	20	20	20	20	20



DHS1622K



Properties:

PVC spiral hose with unbreakable core inside, long-lasting. Smooth wall inside. Color as request. RoHS approval.

Application :


Liquid, powder, granule transmission. Water supply and drainage in construction, Wires protection etc.

Condensation Collecting Tray

Model	HU039C	HU040C	HU041C	HU042C
Loading(kg)	50	50	50	50
Thickness	A=670mm B=350mm C=30mm 0.7 mm	A=790mm B=350mm C=30mm 0.7 mm	A=930mm B=350mm C=30mm 0.7 mm	A=970mm B=350mm C=30mm 0.7 mm



Description




Zinc-coated steel with powder coating


Easy to operate

HU039C

Accessories

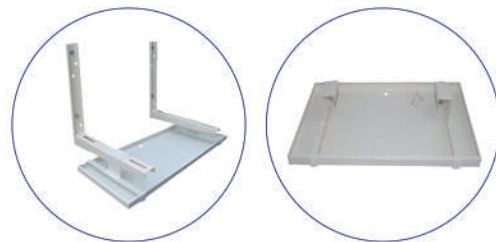


Copper Tube Lineset Kits



Equipped with anti-cracking nuts, and flared copper pipe ends.

Reduce installation procedures while ensuring service life.

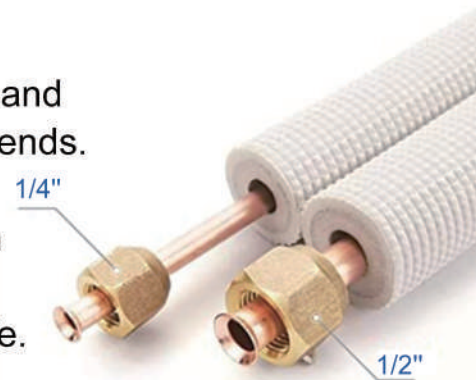

Specification	1/4" & 1/2"	1/4" & 3/8"
Length(FT)	16/25/50	16/25/50



Harbin CMEG Co.,Ltd.

Tel: +86-0451-82387383

Fax: +80-0451-82329292

Mob: +86-13804575040

Email: admin@hrbcmeg.com

Web: www.hrbcmeg.com

Add: No. 10 HuaShan Road, Xiang Fang Dist, Harbin, China.

Global Business

Email: cristinwei@climalink.cn

Web: www.climalink.cn