

THERMAL IMAGING MONOCULAR REDEFINE LRF

iAiming

HOTSPOT HUNTING MADE EASY

LIGHTWEIGHT

QUICK-SWAP BATTERY

UNSTOPPABLE PERFORMANCE



LASER RANGFINDER



LRF
1200m



HIGH THERMAL SENSITIVITY

The iAiming upgraded thermal Imaging sensor NETD \leq 25mK captures the smallest details in all kinds of complicated whether conditions. This ensures reliable performance across a range conditions , making it an indispensable tool for observation use.



NETD
 \leq 25mK

WI-FI CONNECTION




Support Wi-Fi connection for mobile devices, APP can realize screen sharing, real-time control, video and image recording and shooting, firmware update and upgrade, live social platform and other multi-application needs.



MULTIPLE COLOR PALETTES

7 color palettes are optional for different user's demand

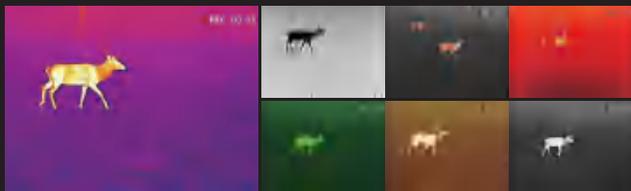

iAiming

Datasheet

Model Number	Rede 315 LRF	Rede 325 LRF	Rede 625 LRF	Rede 635 LRF
Sensor Resolution	384×288	384×288	640×512	640×512
Pixel Pitch	12μm	12μm	12μm	12μm
NETD	≤30mk	≤25mk	≤20mk	≤20mk
Objective Lens	15mm	25mm	25mm	35mm
Frame Rate	50Hz	50Hz	50Hz	50Hz
Angle of View	17.5°× 13.1°	10.5°×7.9°	17.5°×14°	12.5°×10°
Digital Zoom	1X~8X	1X~8X	1X~8X	1X~8X
Detection range (Target 1.7mx0.5m)	800m	1200m	1200m	1800m
Laser Rangefinder range	1200m	1200m	1200m	1200m
Measuring Accuracy	±1	±1	±1	±1
Display Type	OLED			
Display Resolution	1024*768	1024*768	1024*768	1024*768
Palettes	White Hot/Black Hot/Ironbow/Glowbow/Sepia/Red Hot/Green Hot			
Built-in Memory	32GB			
Battery, mAh	18650*1, 3200mAh			
Working hours	7hrs			
Weight (Battery excluded)	407g	417g	417g	432g
Length	158mm×47mm×75mm			
Degree of Protection IP code	IP67			
Operating Temperature	-20°C~+50°C			
Storage Temperature	-40°C~+60°C			

A man in a brown jacket is holding a black handheld device in a snowy mountain setting. The device is a rugged, black, handheld device with a textured grip and a small screen. The man is looking down at the device. The background is a snowy mountain range.

iAiming

IP 67 PROTECTION

The product provided with IP67 level waterproof performance, it is protected from heavy rainfall, snow, smoke, fog or dust.

Uniwin Smart Pty Ltd

Email: info@iaiming.com

Add: PO BOX 182, Springvale, VIC. 3171, Australia

