

**OZtekin®**

**BAUTIX**  
Windows and Door Systems



Öztekin Co. Ltd was establish as Tekin Glass in 1998, it continues to strengthen the business day by day with its experience and success in the sector as a Pimapen one of the biggest Window and Door manufacturer and Aluminum producer.

With 3.500 m<sup>2</sup> closed uPVC, 3.000 m<sup>2</sup> closed Aluminum production area, total 7500 m<sup>2</sup> closed production, Administrational and Warehouse area, 40 qualified employers and 150 dealers, Öztekin . Co Ltd. provides the services all over Izmir and the entire Aegean region in Turkey.

In 2018, we are begun to operate projects and export products to different European Countries including UK, Germany, Austria and France. As a result of systematic and disciplined Works, the company delivered all the projects on time.

We are always made company is renewing itself and increasing its capacity every single day with the production policy , the product quality standards , technical developments and experience in Window and door manufacturing sector Under own brand BAUTIX







- Short Quotation response time.
- Customized and Standard manufacturing.
- Quick delivery time.
- High Product Quality, Designated quality check points.
- Production Traceability.
- Export Department Commercial and Technical support line.



# | Gravity Classic 80

X80 Window and Door Systems add value to your living spaces by means of offering a wider field of view in addition to the superior sound and heat insulation features they deliver.



# | X120



# Saturn Smart Energy 70

With the 5 chamber main profiles of 70 mm in width, the X70 Window and Door Systems are a series designed to deliver the optimum technical solutions for windows and doors.




<b>Profile Width</b>	70 mm
<b>Number of Cubicles</b>	5
<b>Profile Class</b>	B Class (TS EN 12608-1)
<b>Gasket System</b>	Double Gasket System: Internal-External
<b>Gasket Type - Color</b>	TPE - Gray / Black
<b>Glazing Thicknesses (mm)</b>	4, 20, 24, 26, 30, 36, 39

# Gravity LS 175

## Lift and Slide (HBSB)

Combining ease of use with comfort, security and insulation, the GravityLS175 Lifting & Sliding Series offers you a great performance with uninterrupted view in wide and high spaces.

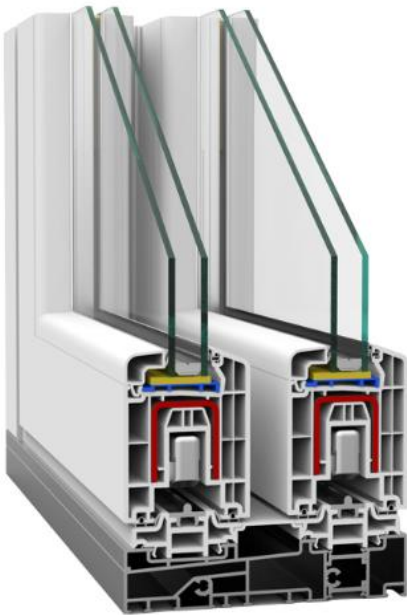

<b>Profile Width (frame)</b>	175 mm
<b>Profile Width (casement)</b>	76 mm
<b>Sub-Frame Installations</b>	PVC / ALM
<b>Profile Standard</b>	A Class (TS EN 12608-1)
<b>Gasket Type - Color</b>	TPE/EPDM - Grey / Black
<b>Glazing Thicknesses (mm)</b>	4, 12, 20, 24, 26, 30, 36, 39

# Distinctive SL

Discover the comfort in your life all over again with the ease of use and superior insulation features offered by the Distinctive Sliding developed for Europe.




Profile Width	149 mm
Number of Cubicles	6
Gasket System	Triple Gasket System: Internal-External and Central Gaskets.
Gasket Type - Color	TPE - Grey / Black
Glazing Bead	Single Claw – PCE Gasket
Glazing Thicknesses (mm)	24, 30, 36, 44, 52
Uw*	0,99 W/m <sup>2</sup> K
Uf	1,18 W/m <sup>2</sup> K

*As calculated in software for the heat controlled triple glazing insulation in the joinery of 2.00 x 1.60.*

# Saturn S Ecoline Sliding

Saturn Sliding Door Series are applied in double, triple and quadruple combinations as PVC doors and, there is no vertical profile on the edge when the door leaves are open in the installations of 90° edges thanks to the special design moveable edge joining profile, thus resulting in spacious spaces without interrupting the view.

<b>Frame Installations</b>	Double rail / triple rail / fixed partition/ frame with insect screen / sill frame
<b>Profile Standard</b>	B Class (TS EN 12608-1)
<b>Gasket System</b>	Brush Gasket / TPV
<b>Gasket Type - Color</b>	TPE - Grey / Black
<b>Glazing Thicknesses (mm)</b>	4, 20, 24

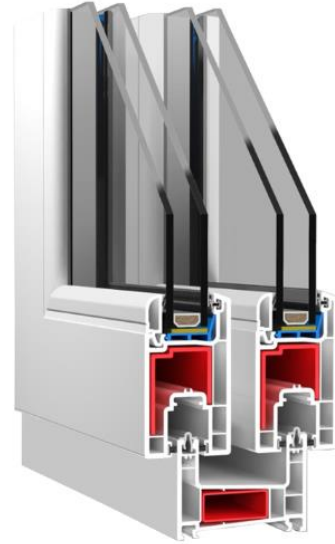



# xp Shutter

A special design of the xp Shutter System makes it possible to get adapted to doors and windows of any type of building.

Possible to attach it externally on any finished joinery. It is possible to directly attach the shutter to the wall surface. The special frame profile it uses makes it possible to be installed on both the surface and facade.



# I monoX Monoblock Blinds

With the monox Blinds Systems that are easy to apply in all types of structures and that are a perfect supplementary to your house, leave the bad weather conditions outside the building and let the happiness inside your home.



Box Type	Monoblok
Box Types	165x165 / 200x200 / 165x200 Insulated/ 200x235 Insulated
Lamel Type	PVC (37mm; 55mm) / ALM
Optional Applications	Roll-Up Fly Net



*Rely on it.*

**INSULATED** sliding series

# LR3200 | SLIDING SYSTEM



## CHARACTERISTICS THAT REFLECT THE IDENTITY OF THE PRODUCT


- | Improved, water resistance air insulation and energy saving
- | Production and installation made easy
- | Custom steel rail for easy and smooth riding and reduced friction
- | Heavy duty bearings
- | Applications of single or multiple locks can be mounted inside the sliding door
- | Inside the frame has a uniquely designed mosquito netting system
- | Project - friendly custom design options available
- | Polyamid profiled hollow center detail
- | Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces
- | Unique concepts and designs utilizing powder coating and wood effects

## TECHNICAL SPECIFICATIONS

SASH WIDTH	: 38 mm
SASH LENGTH	: 92.5 mm
PROFILE THICKNESS	: 1.3 - 1.8 mm
GLASS THICKNESS	: 20 - 26 mm
MAX. SASH LOAD CAPACITY	: 120 kg.
PROFILE GEO. SMOOTHNESS	: EN ISO 12020 -2 Compliant



**INSULATED** sliding series  
**LR3500** | SLIDING SYSTEM


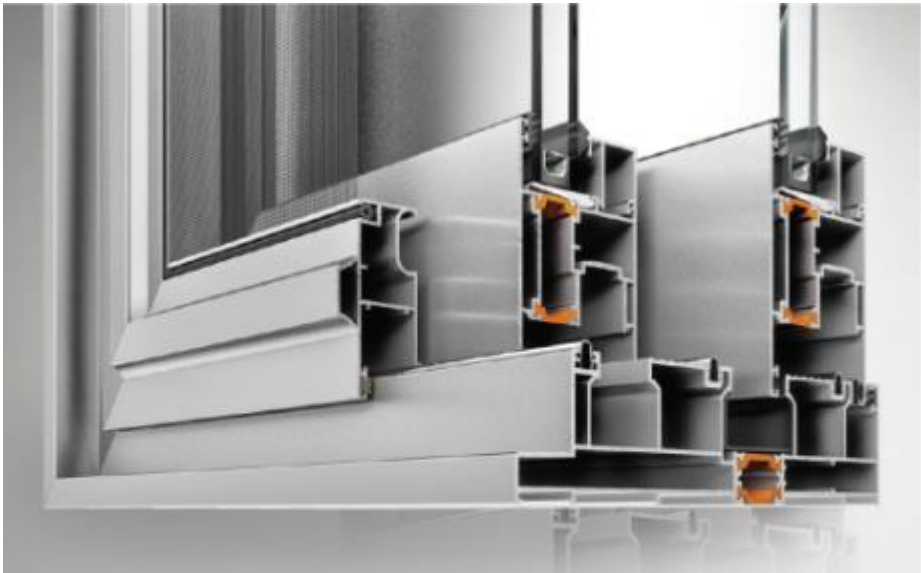


**CHARACTERISTICS THAT REFLECT THE IDENTITY OF THE PRODUCT**

- | Improved, water resistance air insulation and energy saving
- | Production and installation made easy
- | The HBSB mechanism has a 250 kg sash carriage with a lift and slide system
- | Suitable for any project, with custom design options available
- | With stainless steel rails and special bearings the rail movement is significantly improved
- | Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces
- | Unique concepts and designs utilizing powder coating and wood effects

**TECHNICAL SPECIFICATIONS**

SASH WIDTH	: 57 mm
SASH LENGTH	: 92.5 mm
FRAME LENGTH	: 45 mm
GLASS THICKNESS	: 20 - 45 mm
MAX. SASH LOAD CAPACITY	: 200 kg, 300-400 kg.
INSULATION BRIDGE	: 24 mm

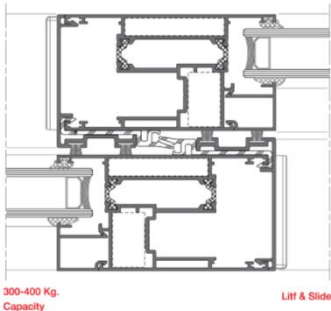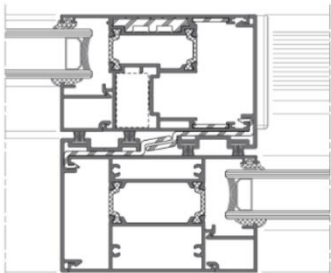

# LR 5100 Opening System (Insulated)



- PRODUCT FEATURES
- Optimum solutions with wide profile options.
  - Ability to apply PVC double opening system with standard aluminum double opening system.
  - Specially designed adjustable locking counterparts.
  - Possibility of better thermal insulation values with different combinations.
  - Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces.
  - Unique concepts and designs utilizing powder coating and wood effects.



TECHNICAL SPECIFICATIONS	
SASH WIDTH	72 mm
FRAME SASH LENGTH	90 mm
FRAME WIDTH	72 mm
GLASS THICKNESS	16 - 42 mm
INSULATION BRIDGE	20 mm
MAX. SASH LOAD CAPACITY	120 - 200 Kg.

# **LR 4100**

## **Opening System**

### **(Uninsulated)**



#### PRODUCT FEATURES

- Thermal glass application: Single or double glazing application up to 32 mm
- Max. glass weight: 80 kg. doors and windows
- Sealing: 3 seal applications
- Unique concepts and designs utilizing powder coating and wood effects.




#### TECHNICAL SPECIFICATIONS

FRAME DIMENSIONS	45 / 50 mm
SASH DIMENSIONS	52 / 64.1 mm
PROFILE THICKNESS	1.4 - 1.6 mm
HARDNESS	P22




# LR 3100

## Sliding System (Insulated)

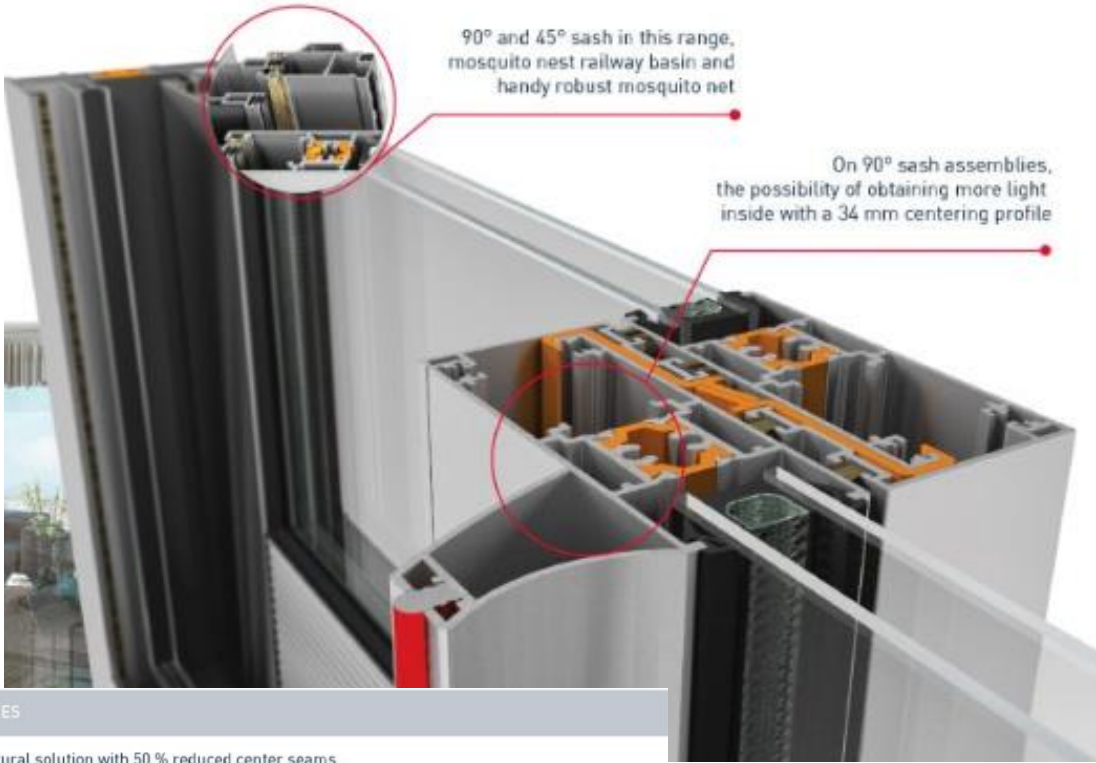

PRODUCT FEATURES


- Minimal architectural solution with 50 % reduced center seams.
- Project - friendly custom design options available.
- Specially designed high strength multi - point locking system.
- Polyamid profiled hollow center detail.
- Inside the frame has a uniquely designed mosquito netting system.
- Production and installation made easy.
- Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces.

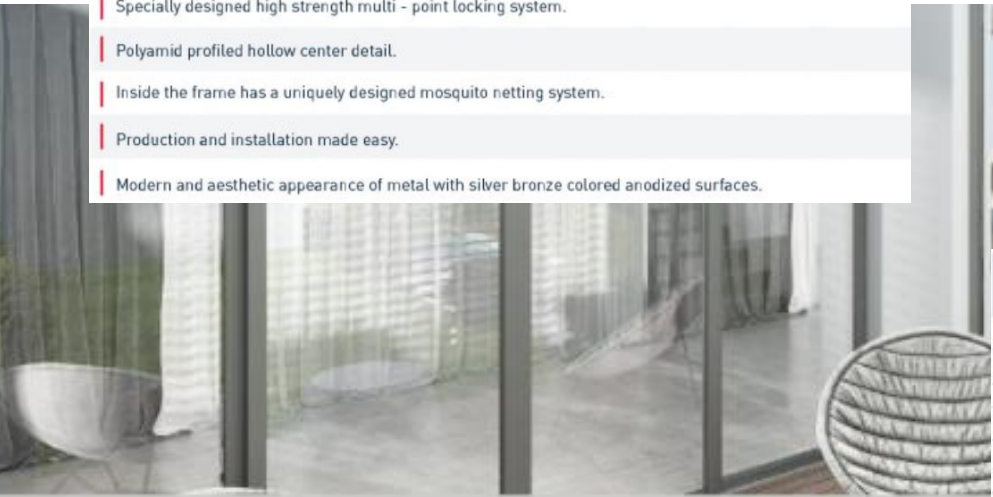

TECHNICAL SPECIFICATIONS	
SASH WIDTH	32 mm
SASH LENGTH	75 mm
FRAME LENGTH	44 mm
GLASS THICKNESS	20 - 22 mm
INSULATION BRIDGE	20 mm
MAX. SASH LOAD CAPACITY	120 Kg.



# LR 4500 Opening System (Uninsulated)

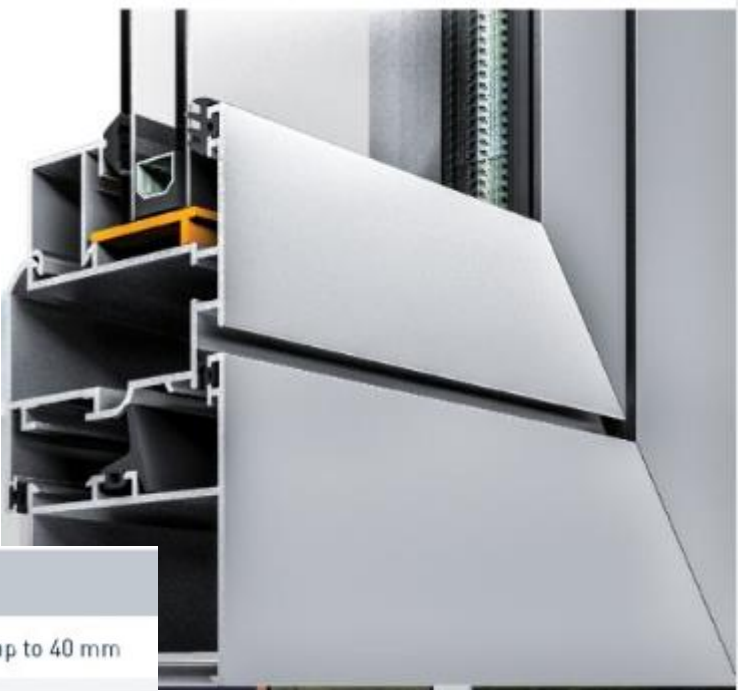

## PRODUCT FEATURES

- Thermal glass application: Single or double glazing application up to 40 mm
- Max. glass weight: 130 kg. doors and windows
- Sealing: 3 seal applications
- Unique concepts and designs utilizing powder coating and wood effects.



## TECHNICAL SPECIFICATIONS


FRAME DIMENSIONS	55 / 63.7 mm
SASH DIMENSIONS	62 / 74.3 mm
PROFILE THICKNESS	1.6 - 2.0 mm
HARDNESS	P22




## Powder Coating Colors



## Wood Effect

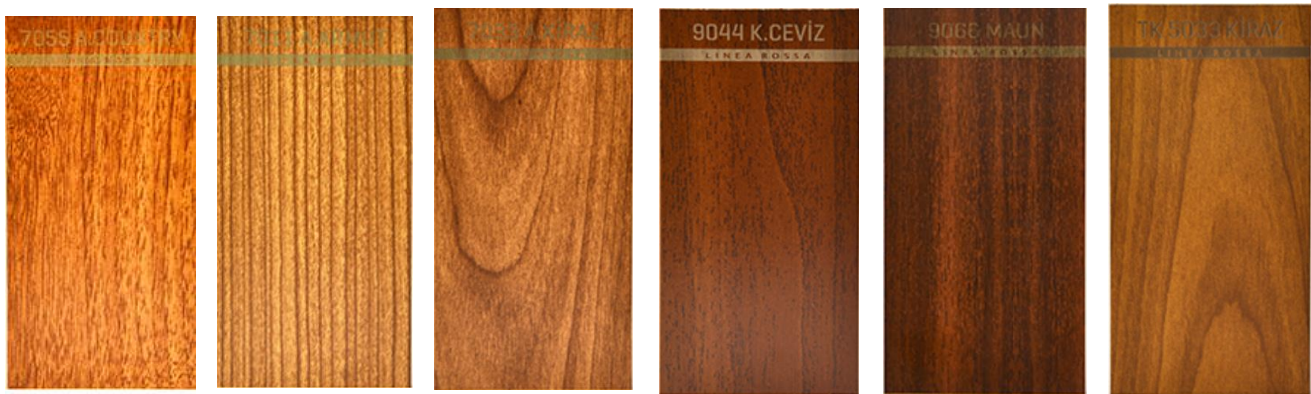

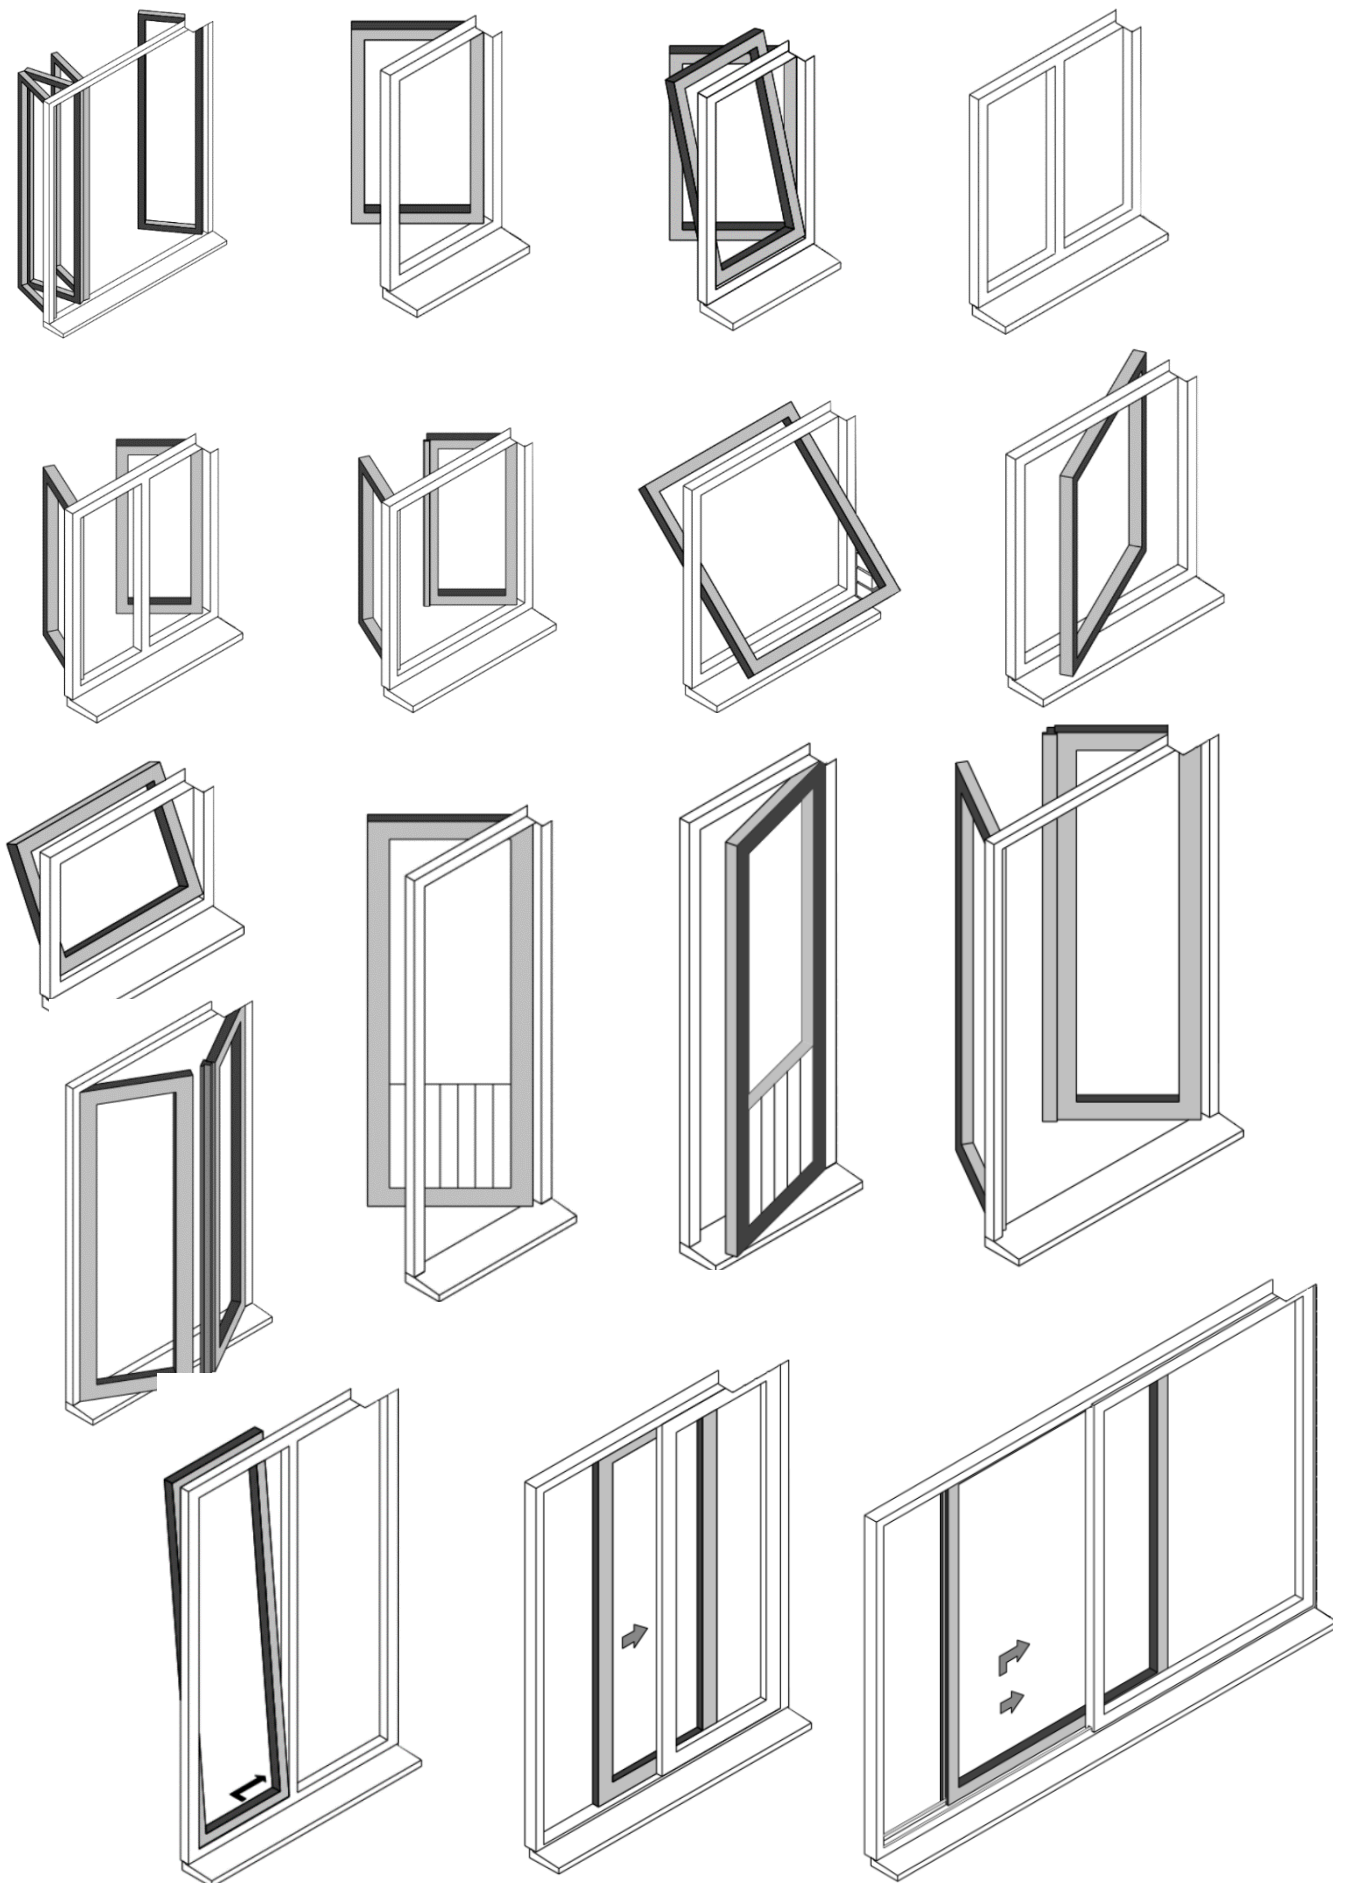










Configurations

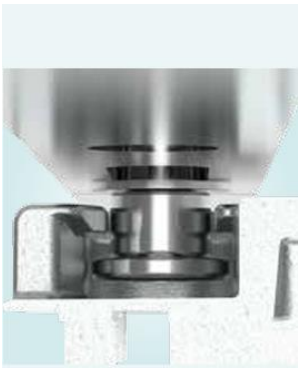

RC 2 Active Burglar Protection



RC 3 Active Burglar Protection



Door Knob Satin



Door Knob Yellow




Stainless steel  
brushed finish



Stainless steel  
fine matt polished



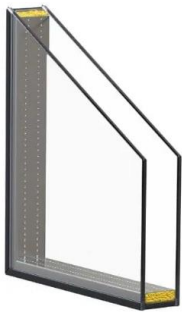

Double Glazing



Triple Glazing

## Design



Transparent



Satinated



Frosted

## Security and Energy Efficiency



### Heat Control

It is produced with the production quality guaranteed by Isicam Systems. It provides insulation and savings by preventing the heat inside from escaping to the outside.



### Heat Control + Safety + Security

Insulating glass systems produced using CL Laminated Glass, which offers safety and security, and Solar Low-E Glass, which offers heat and solar control, prevent injuries that may occur by preventing the glass from disintegrating in case of breakage, in addition to saving on fuel and air conditioning costs.




### Safety + Security + Noise Control

Insulating glass systems produced using Acoustic Laminated Glass, which offers noise control, and Solar Low-E Glass, which offers heat and solar control, in addition to saving on fuel and air conditioning costs, also provide sound insulation, preventing noise transmission to a large extent. It also has the safety and security qualifications of Laminated Glass.

## Additional Options

### Argon gas-filled

Double and Triple glazing windows can be filled with argon gas to help insulate a room and minimize the transfer of heat through the window glass. Argon gas is a colorless, odorless gas that has been used by window manufacturers for years.




### Spacer


Aluminum Spacer  
(Standard)



Warm Edge Spacer  
(Super Spacer)

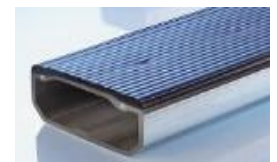



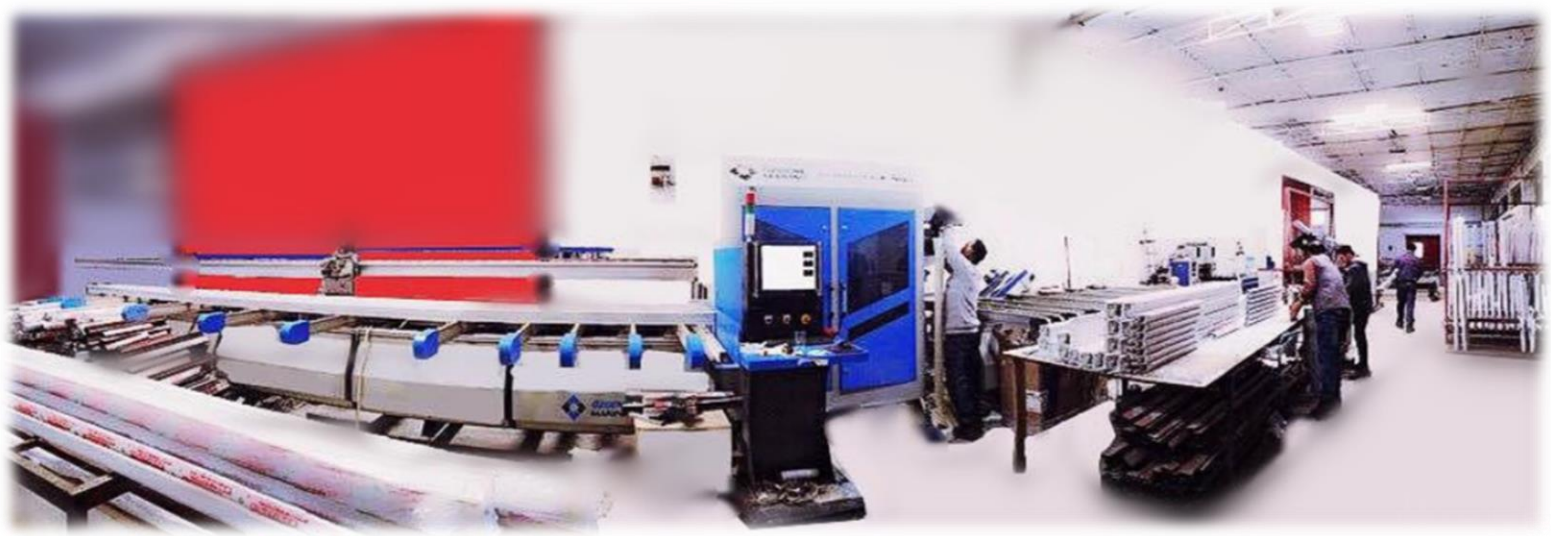

**BAUTIX**  
Windows and Door Systems

**oztekin** global  
Aluminum - uPVC  
Door and Window

**OZtekin®**

Head Office - uPVC –Aluminum  
Door & Window Factory  
İzmir

Address:  
Ümit Mah. Pinar cad. No:95/1 Bornova / İzmir  
Turkey

- [oztekinyapi.com/en](http://oztekinyapi.com/en)
- [info@oztekinyapi.com](mailto:info@oztekinyapi.com)

