

Powerful Heating Performance

Far-Infrared Tube Heater



Quick Heating for Spaces up to 225m²

Rapidly warms even large areas with powerful heating performance.



Dual Steel & Ceramic Filter System

High-quality steel and ceramic filters provide clean, odor-free heating without unpleasant gas smells.



12 Safety Protection Features


Multiple built-in safety systems help prevent fire hazards for safer operation.




Remote Control & Touch Display

Easy-to-use remote control and intuitive touch display for convenient operation.

**High Heat
Efficiency**

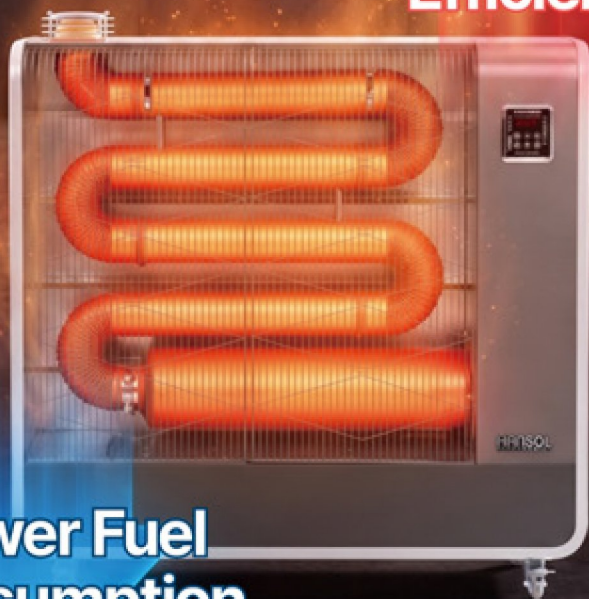

**Lower Fuel
Consumption**



Premium
Heating Tube

Up to
Ø100 mm

Far-Infrared Tube Heater



Model	NXR-TH9700KF	NXR-TH11000KF
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Heating Capacity (kW)	9.6 kW	10.7 kW
Heating Area (m ²)	90~120 m ²	100~130 m ²
Fuel Tank Capacity (L)	25 L	25 L
Fuel Consumption (L/h)	0.87 L/h	0.98 L/h
Dimensions (mm)	W780 x D320 x H930	W760 x D320 x H1,080
Weight (kg)	39 kg	46 kg
Power Consumption (W)	40 W	40 W
Fuel Type	Diesel	Diesel



Model	NXR-TH13500KF	NXR-TH15500KF	NXR-TH17000KF
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Heating Capacity (kW)	13.0 kW	16.0 kW	18.0 kW
Heating Area (m ²)	130~220 m ²	160~200 m ²	180~225 m ²
Fuel Tank Capacity (L)	30 L	45 L	45 L
Fuel Consumption (L/h)	1.21 L/h	1.49 L/h	1.68 L/h
Dimensions (mm)	W960 x D320 x H1,080	W1,300 x D320 x H1,100	W1,300 x D320 x H1,270
Weight (kg)	55.5 kg	62.5 kg	68 kg
Power Consumption (W)	40 W	60 W	60 W
Fuel Type	Diesel	Diesel	Diesel

High-Efficiency, Eco-Friendly Wood Pellets

Far-Infrared Pellet Tube Heater



Low-Power, Low-Noise BLDC Motor

The BLDC motor delivers optimized heat output with low power consumption and quiet operation.



High-Airflow Blower Fan

A powerful blower fan maximizes heating coverage, quickly warming even large spaces.



Patented One-Touch Ignition System

Fast ignition ensures quick startup and clean operation with minimal smoke.



Fire-Safe Backdraft Prevention Fan

Helps prevent backdraft and reduces the risk of fire during operation.

Backdraft Prevention Fan



Model	HDP-F220	HDP-F260	HDP-F300
Power Supply (V / Hz)	AC 220 V / 50 Hz	AC 220 V / 50 Hz	AC 220 V / 50 Hz
Heating Capacity (kW)	22.0 kW	26.0 kW	30.0 kW
Heating Area (m ²)	135~240 m ²	166~265 m ²	198~297 m ²
Fuel Tank Capacity (L)	26 kg	35 kg	42 kg
Fuel Consumption (L/h)	4.5 kg/h	5.5 kg/h	6.5 kg/h
Dimensions (mm)	W1,400 x D350 x H1,246	W1,300 x D350 x H1,486	W1,450 x D400 x H1,516
Weight (kg)	90 kg	100 kg	112 kg
Power Consumption (W)	At Ignition : 1,280 W , At Operation : 88 W	At Ignition : 1,320 W , At Operation : 145 W	At Ignition : 1,320 W , At Operation : 145 W
Fuel Type	Wood pellet	Wood pellet	Wood pellet

Warmth Anywhere, No Electricity Required

Gas Heater



3-Level Heat Control (High / Medium / Low)

Adjust the heat level as needed for greater energy efficiency.



One-Touch Ignition

Starts quickly and easily with a simple one-touch ignition system.



Triple Safety Protection

Equipped with an Oxygen Depletion Safety System (ODS), automatic gas shut-off, and tip-over protection for safer operation.



Operates Without Electricity

Provides reliable heating outdoors or during power outages without the need for electricity.



Model	HSG-5000K	HSG-10000K
Heating Capacity (kW)	5.0 kW	10.0 kW
Gas Consumption (kg/h)	0.42 kg/h	0.84 kg/h
Dimensions (mm)	W 500 x D279 x H913	W 760 x D279 x H1,036
Weight (kg)	20 kg	28 kg
Heating Area (m ²)	13.2~19.8 m ²	55~80 m ²
Fuel Type	LPG / LNG	LPG / LNG
Option	FAN	FAN