

KCR556

7,5" PDW

5 Position telescopic
adjustable stock (7,5")

Modular flip - up
iron sights

Advanced short
stroke gas piston

10.000 Rounds
Barrel Life

STANAG 4694/M1913
compatible picatinny rails
on handguard and Upper
Receiver. MLOK options
available for handguard.

Suitable for right & left hand
shooters with ambidextrous
weapon control

Improved safety selector design that
prevents selector to stay between
firing modes

Cold hammer forged
barrel with hard chrome
plated ID, manganese
phosphate coated OD and
polished chamber



KCR56 7,5" PDW



SPECIFICATIONS

Calibre	5,56mm x 45 NATO
Firing	Mode Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	655 mm
Minimum Length (Stock Collapsed)	575 mm
Overall Height (w/o Mechanical Sights)	185 mm
Weight (w/o Magazine)	2.700 g
Barrel Length	7.5" - 190 mm
Barrel Twist Rate	1:7" - 1:178 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	290 mm
Magazine Type	STANAG Box Type Composite
Magazine Capacity	20 Rds, 30 Rds.
Muzzle Thread	1/2-28 UNEF - A2
Trigger Pull Weight	25 - 40 N
Rate of Fire	800 - 1.000 rpm
Velocity	700 m/s
Effective Range	300 m



 **KALEKALIP**

KCR556

11" CQB



KCR56 11" CQB



SPECIFICATIONS

Calibre	5,56mm x 45 NATO
Firing Mode	Mode Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	810 mm
Minimum Length (Stock Collapsed)	730 mm
Overall Height (w/o Mechanical Sights)	185 mm
Weight (w/o Magazine)	3.200 g
Barrel Length	11" -280 mm
Barrel Twist Rate	1:7" - 1:178 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	360 mm
Magazine Type	STANAG Box Type Composite
Magazine Capacity	20 Rds, 30 Rds.
Muzzle Thread	1/2-28 UNEF - A2
Trigger Pull Weight	25 - 40 N
Rate of Fire	750 - 950 rpm
Velocity	800 m/s
Effective Range	400 m



 KALEKALIP

KCR556

14,5" Carbine



KCR56 14,5" Carbine



SPECIFICATIONS

Calibre	5,56mm x 45 NATO
Firing Mode	Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	890 mm
Minimum Length (Stock Collapsed)	810 mm
Overall Height (w/o Mechanical Sights)	185 mm
Weight (w/o Magazine)	3.350 g
Barrel Length	14,5" - 368 mm
Barrel Twist Rate	1:7" - 1:178 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	360 mm
Magazine Type	STANAG Box Type Composite
Magazine Capacity	20 Rds, 30 Rds.
Muzzle Thread	1/2-28 UNEF - A2
Trigger Pull Weight	25 - 40 N
Rate of Fire	750 - 950 rpm
Velocity	870 m/s
Effective Range	500 m



 KALEKALIP

KCR739

11" CQB



KCR739 11" CQB



SPECIFICATIONS

Calibre	7,62mm x 39
Firing Mode	Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	810 mm
Minimum Length (Stock Collapsed)	730 mm
Overall Height (w/o Mechanical Sights)	185 mm
Weight (w/o Magazine)	3.200 g
Barrel Length	11" - 280 mm
Barrel Twist Rate	1:9" - 1:228 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	360 mm
Magazine Type	Box type steel
Magazine Capacity	30 Rds.
Muzzle Thread	1/2-28 UNEF - A2
Trigger Pull Weight	25 - 40 N
Rate of Fire	650 - 850 rpm
Velocity	640 m/s
Effective Range	300 m



KCR739

16" Infantry Rifle



KCR739 16" Infantry Rifle



SPECIFICATIONS

Calibre	7,62mm x 39
Firing Mode	Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	930 mm
Minimum Length (Stock Collapsed)	850 mm
Overall Height (w/o Mechanical Sights)	185 mm
Weight (w/o Magazine)	3.450 g
Barrel Length	16" - 406 mm
Barrel Twist Rate	1:9" - 1:228 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	360 mm
Magazine Type	Box type steel
Magazine Capacity	30 Rds.
Muzzle Thread	1/2-28 UNEF - A2
Trigger Pull Weight	25 - 40 N
Rate of Fire	650 - 850 rpm
Velocity	710 m/s
Effective Range	400 m



KCR762

12,5" COB



KCR762 12,5" CQB



SPECIFICATIONS

Calibre	7,62mm x 51 NATO
Firing Mode	Safe / Semi / Full Automatic
Maximum Length (Stock Extended)	900 mm
Minimum Length (Stock Collapsed)	820 mm
Overall Height (w/o Mechanical Sights)	195 mm
Weight (w/o Magazine)	3.850 g
Barrel Length	12,5" - 318 mm
Barrel Twist Rate	1:10" - 1:254 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	425 mm
Magazine Type	Polimer box type
Magazine Capacity	20 Rds.
Muzzle Thread	M15x1
Trigger Pull Weight	25 - 40 N
Rate of Fire	600 - 750 rpm
Velocity	750 m/s
Effective Range	400 m



KCR762

16" Infantry Rifle



KMG556

16" Machine Gun



KMG556 16" Machine Gun



SPECIFICATIONS

Calibre	5,56mm x 45 NATO
Firing Mode	Safe / Full Automatic
Feed Mechanism	Belt fed from left side
Maximum Length (Stock Extended)	1.000 mm
Minimum Length (Stock Collapsed)	900 mm
Ammo Box	STANAG 50 Rds./100 Rds/200 Rds. available
Overall Height	235 mm
Weight (w/o Accessories)	7.800 g
Barrel Length	16" - 406 mm
Barrel Twist Rate	1:7" - 1:177,8 mm 6 grooves right hand twist
Flash Hider	A2 birdcage or 3 Prong
Sight Radius	529 mm
Trigger Pull Weight	35 - 70 N
Rate of Fire	750 - 950 rpm
Velocity	900 m/s
Effective Range	600 m (Point target) / 800 m (Area target)



KMG556CL

10,5" Machine Gun



KMG556CL 10,5" Machine Gun



SPECIFICATIONS

Calibre	5,56mm x 45 NATO
Firing Mode	Safe / Full Automatic
Feed Mechanism	Belt fed from left side
Maximum Length (Stock Extended)	860 mm
Minimum Length (Stock Collapsed)	775 mm
Minimum Length (Stock Folded)	610 mm
Ammo Box	STANAG 50 Rds./ 100 Rds/200 Rds. available
Overall Height	235 mm
Weight (w/o Accessories)	5.750 g
Barrel Length	10,5" - 267 mm
Barrel Twist Rate	1:7" - 1:177,8 mm 6 grooves right hand twist
Flash Hider	3 Prong
Sight Radius	465 mm
Trigger Pull Weight	35 - 70 N
Rate of Fire	750 - 1.000 rpm
Velocity	800 m/s
Effective Range	400 m (Point target) / 600 m (Area target)



 KALEKALIP

KMG762

18" Machine Gun



KMG762 18" Machine Gun



SPECIFICATIONS

Calibre	7,62mm x 51 NATO
Firing Mode	Safe / Burst- Sustained Fire
Maximum Length (Stock Extended)	1.100 mm
Minimum Length (Stock Collapsed)	1.000 mm
Overall Height	235 mm
Weight (w/o Accessories)	8.200 g
Barrel Length	18"- 457 mm
Barrel Twist Rate	1:12" - 4 grooves land right hand
Flash Hider	A2 Birdcage or 3 Prong
Sight Radius	520 mm
Ammo Box	STANAG Interface 50-100 Rounds
Trigger Pull Weight	35 - 70 N
Rate of Fire	700 - 900 rpm
Velocity	800 m/s
Effective Range	800 m (Point target) - 1.000 m (Area target)
Buttstock	5 Position retractable



KMR762

20" Designated Marksman Precision Rifle



KMR762 20" Designated Marksman Precision Rifle



SPECIFICATIONS

Calibre	7,62mm x 51 NATO / .308 Win
Firing Mode	Safe / Semi Automatic
Maximum Length (Stock Extended)	1.150 mm (5 position telescopic stock)
Minimum Length (Stock Collapsed)	1.050 mm (5 position telescopic stock)
Overall Height (w/o Mechanical Sights)	190 mm
Weight (w/o Magazine)	5.700 g
Barrel Length	20" - 508 mm
Barrel Twist Rate	1:12 " - 4 Grooves right hand twist
Muzzle Brake	With moderator interface
Sight Radius	500 mm
Magazine Type	Box Type, Composite
Magazine Capacity	20 Rds.
Trigger Pull Weight	15 - 25 N match trigger
Velocity	800 m/s
Effective Range	800 m
Accuracy	1,5 MOA at 100 m




KGL40

Grenade Launcher



KGL40 Grenade Launcher

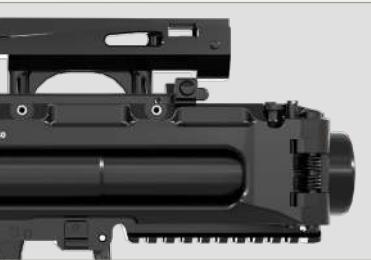

SPECIFICATIONS

Calibre	40mm x 46 (LV)
Feed Mechanism	Fed from left side
Firing Mode	Single Shot, Double Action Trigger
Length (w/o Buttstock)	275 mm
Length (with Buttstock Extended)	515 mm
Length (with Buttstock Collapsed)	475 mm
Width	60,4 mm (with sight 103 mm)
Height	161 mm (with sight 221 mm)
Barrel Length	220 mm - 8,6"
Weight	1.850 g w/o Buttstock and Accessories
Ammo	40mm x 46 LV, ER, AntiRiot Rds., Tactical Rds., Flares
Number Of Grooves	6 right hand
Muzzle Velocity	70 m/s
Effective Range	250 m
Maximum Range	400 m



KGL38

37/38 Caliber Non-Lethal Grenade Launcher



KGL38 37/38 Caliber Non-Lethal Grenade Launcher




SPECIFICATIONS

Caliber / Ammo	37/38mm Tear Gas Capsule
Firing Mode	Safe / Single Shot - Double action trigger
Length (Stock Extended)	515 mm
Length (Stock Collapsed)	475 mm
Length (w/o Stock)	275 mm
Overall Height (w/o Mechanical Sights)	161 mm
Width	60.4 mm
Weight (w/o buttstock and accessories)	1.500 g
Weight with Buttstock	2.350 g
Barrel Length	8.6" - 220 mm



KAGL40

Automatic Grenade Launcher

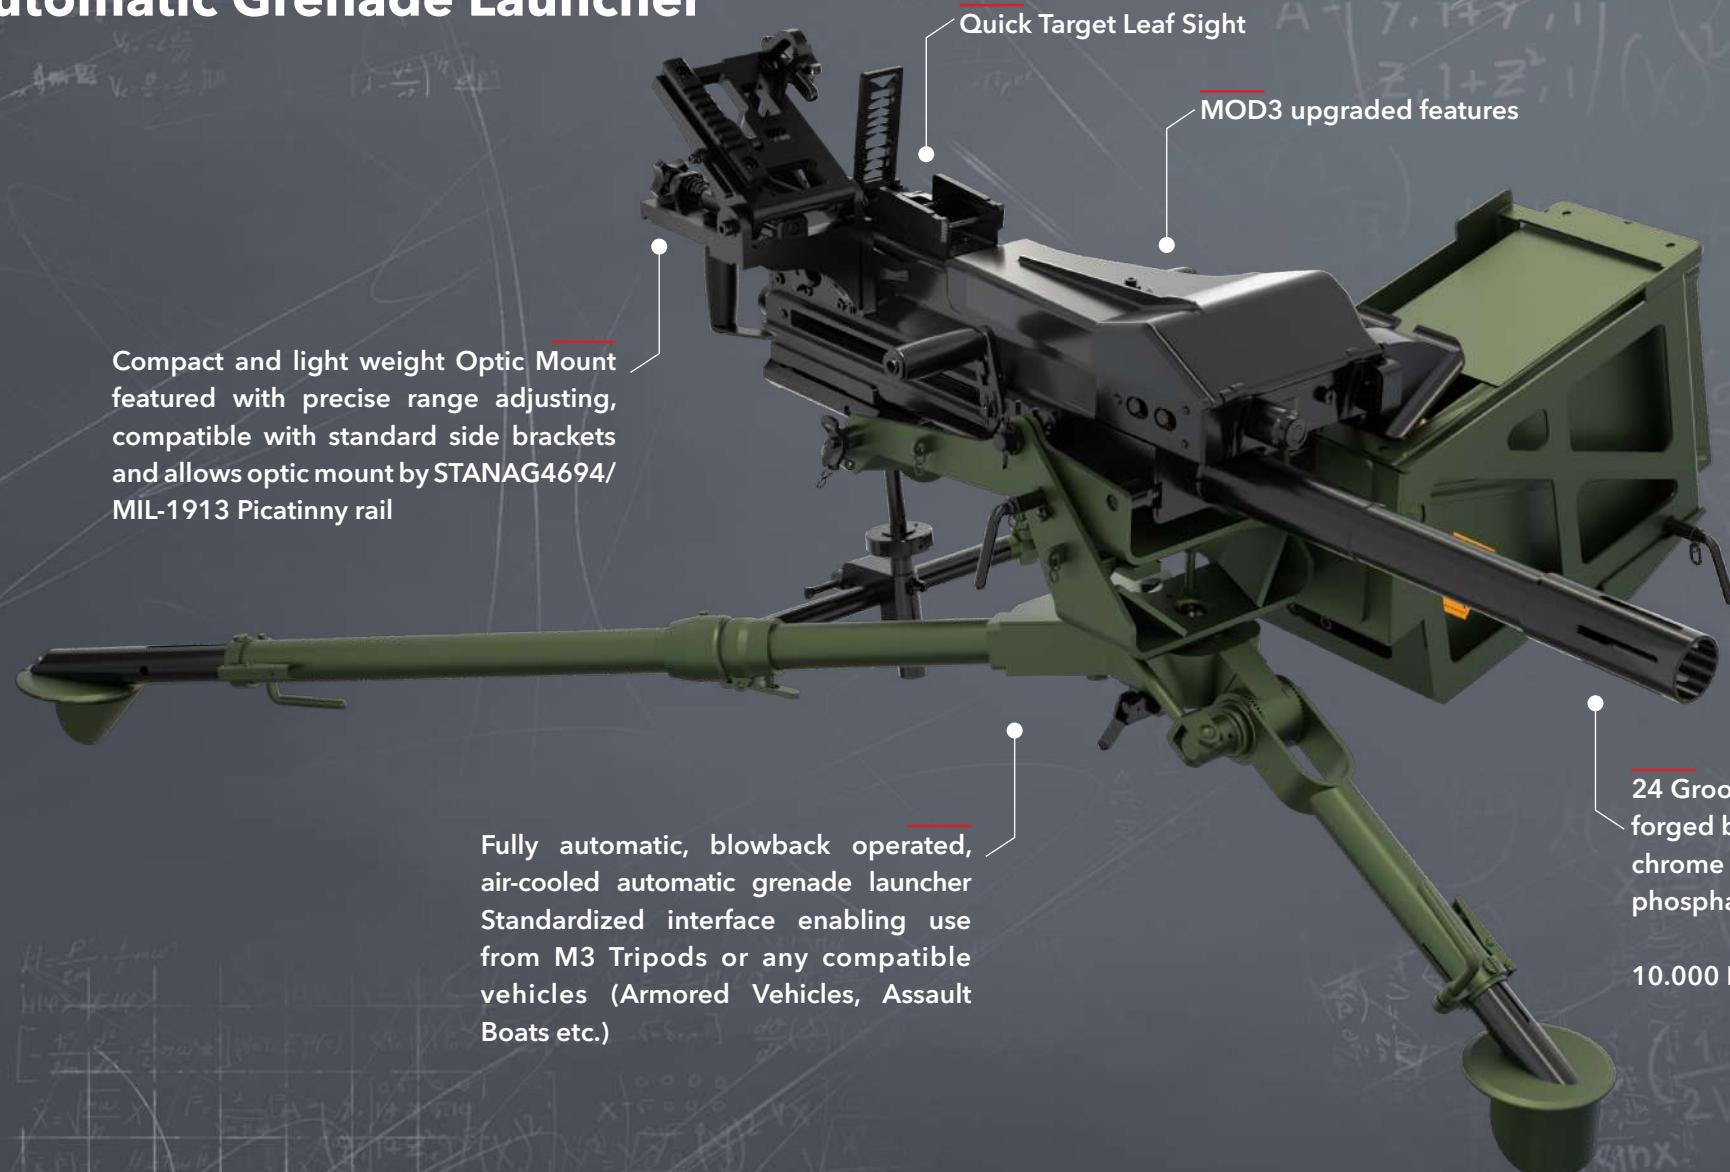

KAGL40 Automatic Grenade Launcher



SPECIFICATIONS

Calibre	40mm x 53 (HV)
Principle Of Operation	Recoil operated open bolt
Feed Mechanism	Belt fed from left side
Firing Mode	Safe / Full Automatic
Length	1.090 mm
Width	340 mm
Height	225 mm
Barrel Length	415 mm
Weight	35 kg w/o mount & tripod
Ammo	HE, HEDP, TP, TPT
Barrel	24 grooves RH Turn, hardened and forged CMV alloy barrel with hard chrome plated
Muzzle Velocity	240 m/s
Rate Of Fire	300 - 370 rpm (Cyclic)
Effective Range	1.500 m
Maximum Range	2.000 m



ACCESSORIES

INFANTRY RIFLES



MAGAZINES



30 ROUNDS
5,56mm x 45
NATO MAGAZINE



20 ROUNDS
5,56mm x 45
NATO MAGAZINE



20 ROUNDS
7,62mm x 51
NATO MAGAZINE



30 ROUNDS
7,62mm x 39
AR TYPE MAGAZINE

TACTICAL GRIPS



FRONT GRIP
WITH BIPOD

SUPPRESSOR



556mm x 45 NATO
Suppressor

FLASH HIDER



A B C

STOCKS



STOCK-A



STOCK-B

HANDGUARDS



HANDGUARD
A / LONG



HANDGUARD
B / SHORT



HANDGUARD- C



HANDGUARD
B / SHORT 2



HANDGUARD- D

REAR-FRONT SIGHT



REAR
SIGHT-A



REAR
SIGHT-B



REAR
SIGHT-C



FRONT
SIGHT- B

ACCESSORIES

MACHINE GUNS



BIPOD



STOCK



GRIP



45 DEGREE
ANGLED
FRONT GRIP

FRONT SIGHT



REAR SIGHT



BARREL



BARREL
WITH
HAND GRIP

BARREL
WITH
HAND GRIP
AND
HEAT SHIELD

FLASH HIDER



AMMO BOX



200 ROUNDS



100 ROUNDS



50 ROUNDS



200 ROUNDS



100 ROUNDS

HEAT SHIELD



ACCESSORIES

SNIPER - MARKSMAN RIFLES



BIPOD



MUZZLE BREAK



MAGAZINE



20 ROUNDS
7,62mm x 51 NATO
MAGAZINE

OPTIC MOUNT



SUPPRESSOR



ACCESSORIES

GRENADE LAUNCHERS



BOX TRAY



AMMUNITION
BOX TRAY

**TRAVERSE AND
ELEVATION WHEEL**



TRIPOD



M3

MOUNT INTERFACE



COVER



COVER,
PROTECTION

**FEED THROAT
ASSEMBLY**



ROUND REMOVAL TOOL



BORE CLEANING BRUSH



**COLLAPSIBLE
CLEANING ROD**

