


FINN[®]

SMARTER WAYS TO WORK[™]

HydroSeeders[®]

More Jobs. More Profits. **More Success.**

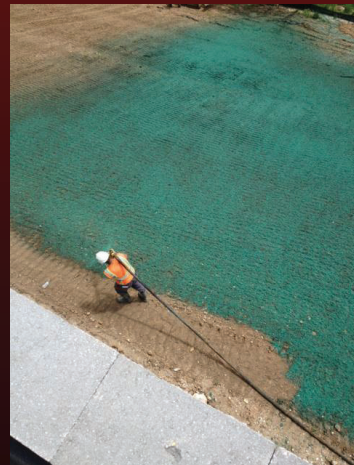



T170

Skid Mount Only

Loads per Hectare	1*
Working Weight	11,022 kg
Power	Cummins QSF 2.8 Diesel Tier 4F, 65hp (48 kW)
Tank Size	5,680 L work cap. / 6,625 L liquid cap.
Pump	Centrifugal 10.2 cm x 5 cm, 1,210 lpm @ 8 Bar, 2.54 cm solid clearance
Discharge Distance	Up to 61m from end of the tower**



T120S

Skid Mount Only

Loads per Hectare	1.2*
Working Weight	7,394 kg
Power	Yanmar 3TNV88C-DYEM, 35.1hp (26.2 kW), 3 cylinder water-cooled diesel engine (Tier 4 Final)
Tank Size	3,790 L work cap. / 4,468 L liquid cap.
Pump	Centrifugal 10 cm x 5 cm, 646 lpm @ 7 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 55m from end of the tower**



T90S

Skid Mount Only

Loads per Hectare	1.5*
Working Weight	6,106 kg
Power	Yanmar 3TNV88C-DYEM, 35.1 hp (26.2 kW), 3 cylinder water-cooled diesel engine (Tier 4 Final)
Tank Size	3,030 L work cap. / 3,558 L liquid cap.
Pump	Centrifugal 10 cm x 5 cm, 646 lpm @ 7 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 55m from end of the tower**



T75S

Skid Mount Only

Loads per Hectare	1.72*
Working Weight	4,177 kg
Power	Kohler CH730, 23.5 hp (17.5 kW), 2 cylinder, OHV, air cooled, gas
Tank Size	2,650 L work cap. / 3,100 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 245 lpm @ 5 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 27m from end of the tower**



T60S

Skid Mount Only

Loads per Hectare	2.4*
Working Weight	3,253 kg
Power	Kohler CH730, 23.5 hp (17.5 kW), 2 cylinder, OHV, air cooled, gas
Tank Size	1,890 L work cap. / 2,270 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 245 lpm @ 5 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 27m from end of the tower**



T30S

Skid Mount Only

Loads per Hectare	4.3*
Working Weight	2,068 kg
Power	Kohler CH620, 19hp (14.2 kW), electric start, air cooled, gas
Tank Size	1,070 L work cap. / 1,268 L liquid cap.
Pump	Centrifugal 7.5 cm x 3.75 cm, 227 lpm @ 4 Bar, 1.9 cm solid clearance, adjustable
Discharge Distance	Up to 23m from end of the tower**



L10

Estimated Coverage: 121 m²
 Working Weight: 568 kg
 Power: 4,6 kW Honda Gas
 Tank Size: 380 Liter Polyethylene
 Pump: Jets, 530 Lpm, 3,6 Bar
 Dimensions: L: 141 cms, W: 86 cms, H: 89 cms



L20

Estimated Coverage: 204 m²
 Working Weight: 1,022 kg
 Power: 8,7 kW Honda Gas
 Tank Size: 760 Liter Polyethylene
 Pump: Jets, 1,140 Lpm, 3 Bar
 Dimensions: L: 170 cms, W: 122 cms, H: 113 cms



L30

Estimated Coverage: 372 m²
 Working Weight: 1,551 kg
 Power: 8,7 kW Honda Gas
 Tank Size: 1,140 Liter Polyethylene
 Pump: Jets, 1,140 Lpm, 3 Bar
 Dimensions: L: 244 cms, W: 125 cms, H: 137 cms



L55

Estimated Coverage: 604 m²
 Working Weight: 2,500 kg
 Power: 18,6 kW Kohler Gas
 Tank Size: 1,520 Liter Polyethylene
 Pump: Jets, 2,470 Lpm, 6 Bar
 Dimensions: L: 292 cms, W: 155 cms, H: 163 cms

Visit

finncorp.com/international-dealers/
 and Find Your Nearest Authorized Dealer



9281 LeSaint Drive | Fairfield, OH 45014-5457
 Tel +1 800 543 7166

Follow us on:     
www.FINNcorp.com