

Types of models Perfect fitting for the Ferradix® ground anchor Ø 60 (Order no. 2068, 2069, 200122)

Cross Sections

for square poles
with length to 3 m

from 100 x 100 mm
to 140 x 140 mm

for round poles
with length to 3 m

from Ø 120 mm
to Ø 140 mm

for rectangular poles
with length to 2 m


from 60 x 90 mm
to 90 x 140 mm

for square poles
with length to 2 m


from 90 x 90 mm
to 100 x 100 mm

for round poles
with length to 2 m


from Ø 90 mm
to Ø 100 mm

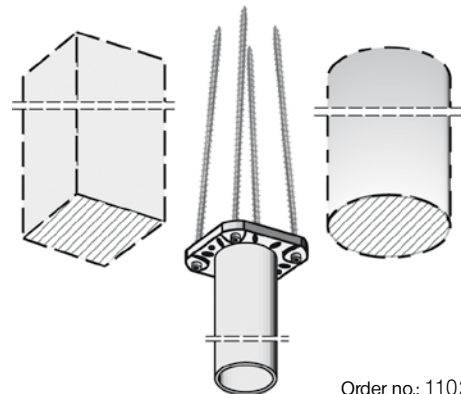

Order no.: 110299

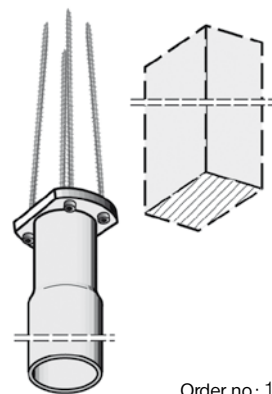

Order no.: 110366

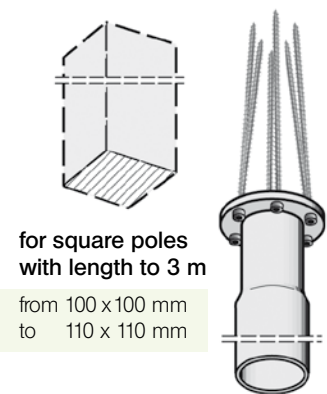

Order no.: 110269

for square poles
with length to 3 m

from 100 x 100 mm
to 110 x 110 mm


for round poles
with length to 3 m

from Ø 100 mm
to Ø 120 mm


New pole ventilation system

The joist with undersurface ventilation of the pole

Ventilation during day and night by difference in temperature

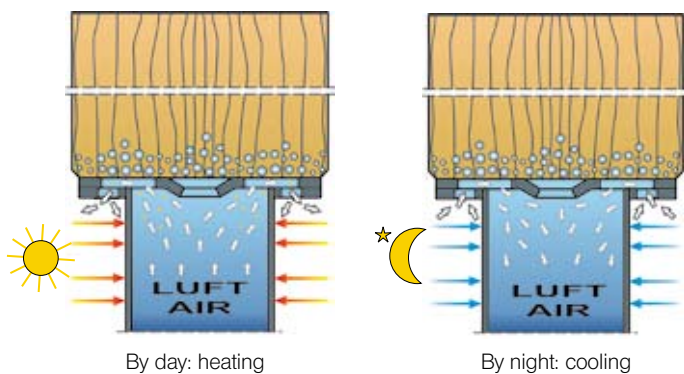

Ventilation according to the principle of Venturi

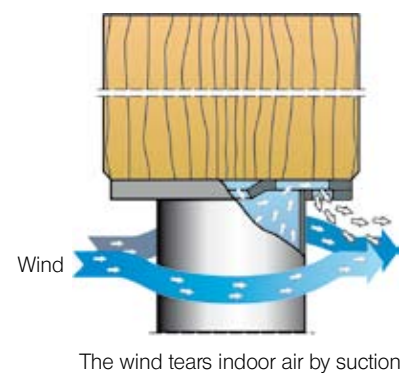

Static load test

For stability of the screw joint



Maximum loading:
approx. 500 Kp

F0076E/0510

Your contact person:



Gebr. Sträb GmbH+Co
Behrstraße 53
73240 Wendlingen/Neckar, Germany
Phone +49 (0) 70 24 / 94 10 0
Fax +49 (0) 70 24 / 94 10 55
info@straeb.de - www.straeb.de


New for wooden poles: The Joist of the FERRADIX®

The pole Joist for the Ferradix

An innovation of:




new

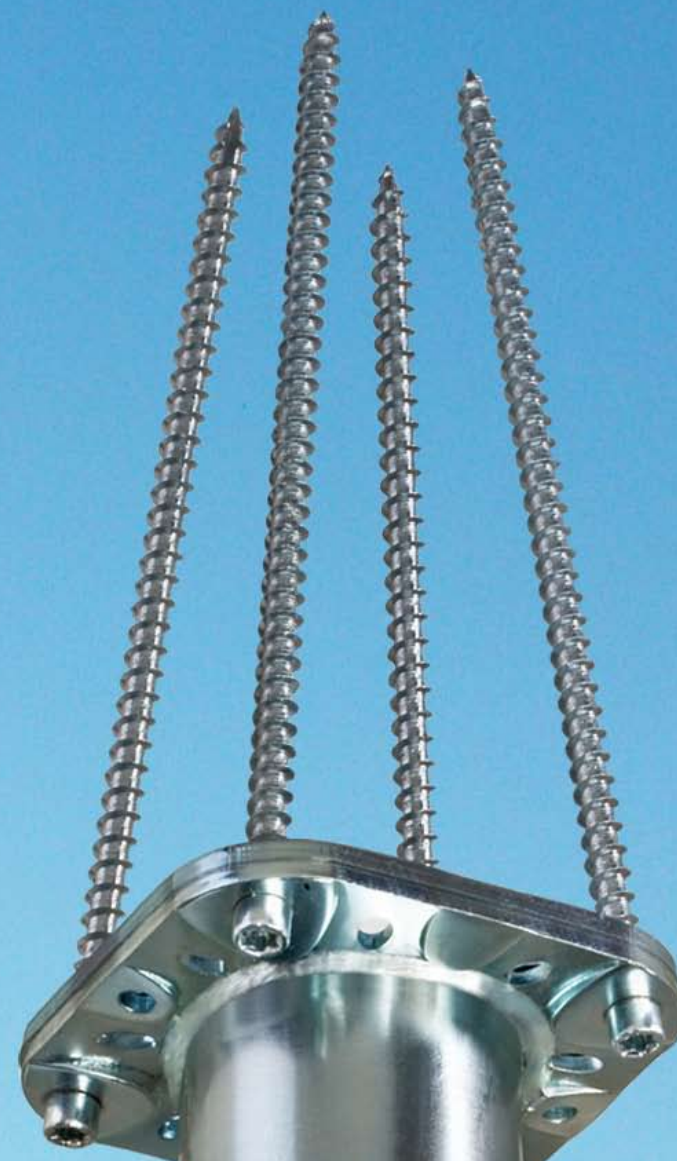

Liz. Pat. DE 198 43 2933

© Applies to all States of the EU

The pole Joist: now without pole heel

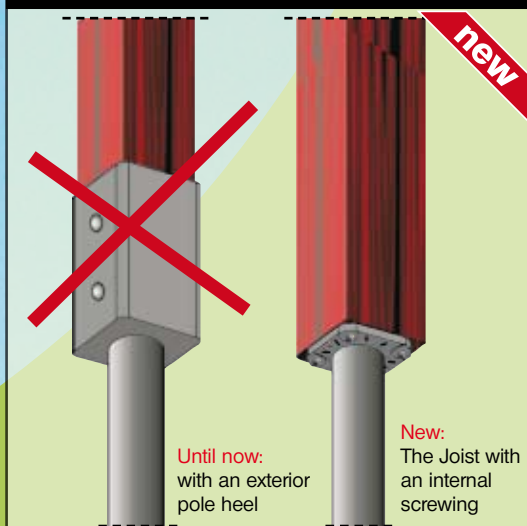


Until now:
with an exterior
pole heel

New:
The Joist with
an internal
screwing



The flexible complete system

The Joist and the ground anchor FERRADIX®

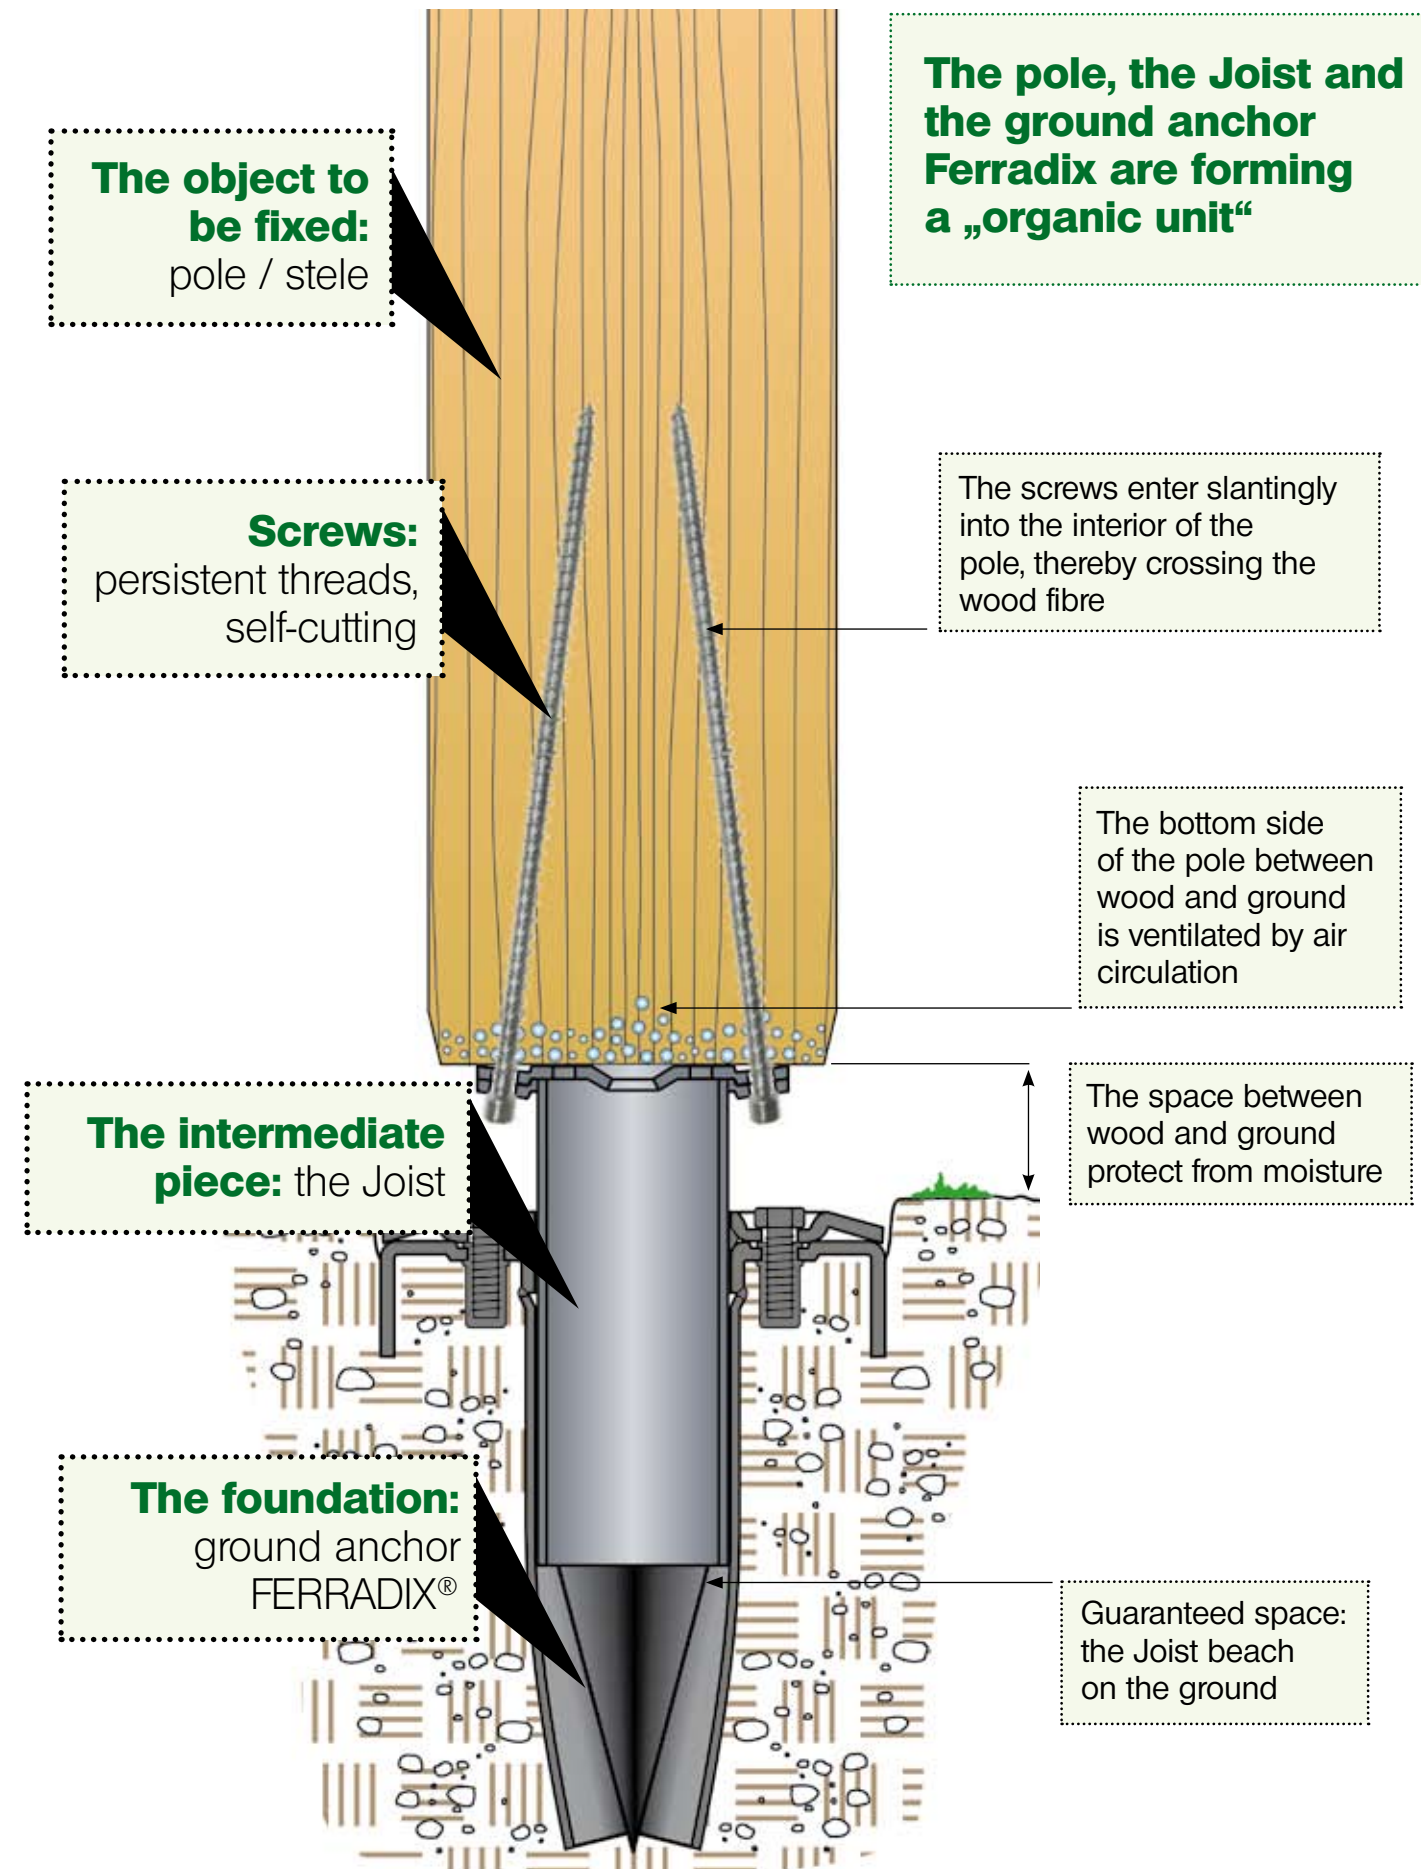

Utilization

The Joist enables easy installation on the bottom side of the pole

