


European Standard Entry Door

High-end Steel Entry Door



Surface finish: painting
Door skin: 0.5mm cold rolled steel sheet
Door thickness: 68mm
Door core: polystyrene
Frame material: aluminum
Hardware: luxury pull handle, multi-point locking system, heavy duty hinge

Anti-burglary Steel Door



Surface finish: painting
Door skin: 1.0mm ga. steel sheet
Door thickness: 55mm
Door core: polystyrene
Frame material: 1.5mm ga. steel sheet
Hardware: luxury pull handle, anti-burglary locking system, heavy duty hinge

Steel Entry Door



Leaf surface finish: UV-resistant PVC film coated
Door skin: 0.5mm cold rolled sheet
Door thickness: 55mm
Door core: polystyrene
Frame material: 1.2mm ga. steel sheet
Frame surface finish: powder coating
Hardware: lever entry handle, anti-burglary locking system, heavy duty hinge

High-end Armored Door



Leaf surface finish: wooden veneer and painting
Door Skin: 12mm solid wood + 0.8mm steel sheet
Door thickness: 90mm
Door core: polystyrene
Frame material: 1.5mm ga. sheet
Frame surface finish: powder coating
Threshold: SS threshold
Hardware: luxury pull handle, multipoint lock system, heavy duty exterior hinge



An Exceptional Door&Window Solution Professional



McMason offers durable doors suitable for residential and commercial use:

- UL certified fire doors
- Doors for mobile home
- Doors for modular building
- Exterior doors for Europe/America

Add: NO.29 JINSHA ROAD HECHUAN DISTRICT, CHONGQING, 40000, CHINA
Web: <https://mcmason.com>
Email: info@mcmason.com
Tel: (023)6703 2886



Trusted Door Manufacturer

Your Reliable Partner For Door & Window Solutions

Company Introduction

McMason is a leading manufacture located in Chongqing city, which is the most important cities on the Yangtze River. Our management team has over 60 years of combined experience, ensuring high-quality products and innovative solutions.

Advantage:

- Extensive experience in the door & window industry.
- Full certifications: WH fire certification, CE, NFRC, NAMI, ISO 9001
- Advanced CNC facility
- Flexible logistics arrangements
- Highly collaborative team providing superior service.


Metal Fabrication



CNC sheering



Punching



CNC bending




Auto Gluing



Auto Cold pressing



Robot Laser Welding

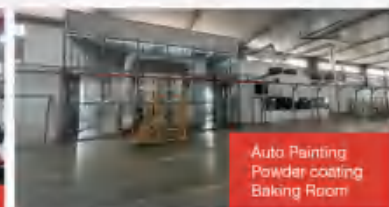

Auto Painting
Powder coating
Baking Room

American Standard Commerical & Residential Door

Steel Entry Door



Surface finish: pre-coated
Door skin: 24G galvanized steel sheet
Door thickness: 1-3/4"
Door core: polystyrene
Frame materials: primer wood & plastic composite
Lock prep : knob & deadbolt
Door sweep: PVC
Door threshold: adjustable alu & wpc composite
Hinge: 4-1/2" heavy duty SS hinges
Color: optional

Combo Door



Surface finish: pre-coated
Door skin: 24G galvanized steel sheet
Door thickness: 1-3/4"
Door core: polystyrene
Frame materials: primer wood & plastic composite
Lock prep : knob & deadbolt
Door sweep: PVC
Door threshold: Alu
Hinge: 4-1/2" heavy duty SS hinges
Storm door: extruded aluminum profile with 1/8" tempered glass
Color: optional

Steel Out-swing Door



Surface finish: pre-coated
Door skin: 24G galvanized steel sheet
Door thickness: 1-3/8"
Door core: polystyrene
Frame materials: 20G galvanized steel sheet
Frame finish: powder coating
Frame type: nailing flange
Lock prep : knob & deadbolt
Hinge: 4 continuous hinges
Color: optional



Hollow Metal Door



Surface finish: Primed
Door skin: 18 ga. galvanized steel sheet
Door thickness: 1 3/4"
Door core: Polystyrene core
Frame material: 16 ga. galvanized steel sheet
Standard jamb depth: 5 5/8"; 5 3/4"
Frame type: dry wall, masonry
Maximum size: 4'0" x 8'0"
Hinge prep: 4.5" x 4.5"



Container Door



Surface finish: Primed
Door skin: 20 ga. galvanized steel sheet
Door thickness: 1 3/4"
Door core :Polystyrene core
Frame material: 16 ga. galvanized steel sheet
Lock prep: 161 lock with deadbolt prep
Hinges: 3*4.5" x 4.5" hinge
ADA compliant threshold

