

- BLE -

FSC-BT2024NI



- Chipset: Nordic nRF54L15
- Version: Bluetooth 6.0
- Size: 12 x 17 x 2.0 mm
- Power Supply: 3.3 V
- Interfaces: UART, I²C, NFC
- Profiles: GATT, MESH, Matter, Channel Sounding
- Tx Power: -8 dBm - +8 dBm

FSC-BT618V



- Chipset: TI CC2642R
- Version: Bluetooth 5.2
- Size: 13 x 26.9 x 2.2 mm
- Power Supply: 1.8 V - 3.6 V
- Interfaces: UART, I²C, SPI
- Profiles: GATT, ATT, GAP, HOGP

FSC-BT691



- Chipset: Dialog DA14531
- Version: Bluetooth 5.1
- Size: 10 x 11.9 x 3.0 mm
- Power Supply: 1.65 V - 3.6 V
- Interfaces: UART, I²C, SPI
- Profiles: GATT, iBeacon, Eddystone
- Certification: CE, FCC, IC, KC, TELEC

FSC-BT677D



- Chipset: Silicon Labs EFR32BG21
- Version: Bluetooth 5.4
- Size: 13 x 16.5 x 2.4 mm
- Power Supply: 1.77 V - 3.8 V
- Interfaces: UART, GPIO, ADC, PWM
- Profiles: HOGP, Mesh, GATT, ATT
- Tx Power: +20 dBm



feasycom.com

Shenzhen Feasycom Co., Ltd

Web: www.feasycom.com


E-mail: support@feasycom.com

Add: Rm 511/508/408, Building A, Fenghuang Zhigu, Tiezai Rd,

Xixiang, Baoan Dist., Shenzhen, 518102, China



IoT | Bluetooth
Wi - Fi

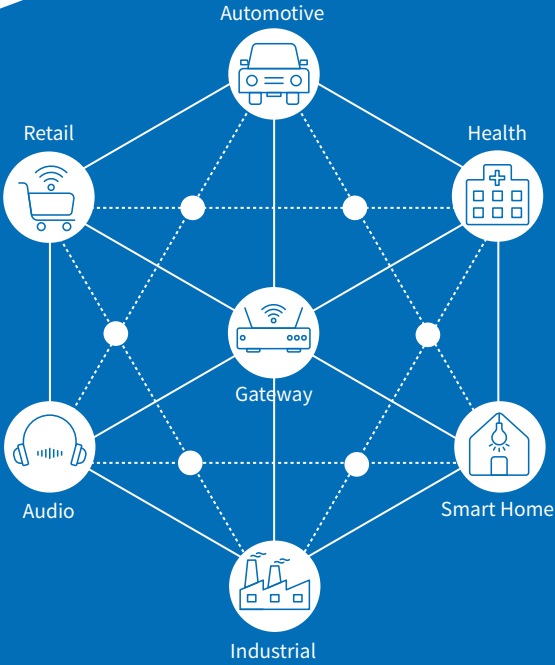

Make Communication Easy and Free

- Services -



Hardware and
Firmware design



Structural and
industrial design



App/Cloud Services
Development



Antenna Design
and Diagnostics



SDK / HDK



In-depth
design

- Company Profile -

Feasycom focuses on the research and development of IoT products and services. We have rich solution categories covering technologies like Bluetooth, Wi-Fi, RFID, 4G, Matter, UWB, etc. and products like modules, beacons, gateways, adapters, etc. In addition, we can provide one-stop solution customization and technical support services based on customer requirements, including hardware, firmware, APP, cloud, etc.

Make communication easy and free. It is this belief that leads Feasycom continue to explore, innovate and strive to provide users with an easy and free communication way.

- BT Dual Mode -

- BT Audio -

- Wi-Fi SOC -

- BT/Wi-Fi Transceiver -

FSC-BT2064FI  - Chipset: FSC1036D - Version: Bluetooth 5.3 Dual Mode - Size: 12 x 17 x 2.2 mm - Power Supply: 3.3 V - 3.6 V - Interfaces: UART, SPI, I²C, PWM, ADC, AES - Profiles: SPP, HOGP, GATT, HID	FSC-BT1026C  - Chipset: QCC3024 - Version: Bluetooth 5.1 Dual-Mode - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.0 V - 4.2 V - Interfaces: UART, I²C, PCM/I²S, SPI - Profiles: A2DP, AVRCP, HFP, HSP, PBAP, HID, SPP, GATT - Certification: CE, FCC, IC, KC, TELEC, BQB, NCC	FSC-WF3821  - Chipset: Nordic nRF7002 - Version: Wi-Fi 6 802.11 a/b/g/n/ac/ax - Size: 12 x 15 x 2.2 mm - Power Supply: 3.3 V - Interfaces: QSPI, SPI - Profiles: GATT, TCP, UDP, HTTP/HTTPS, MQTT - Frequency: 2.4GHz & 5GHz Dual-Band	FSC-BW5048QV  - Chipset: QCA6688AQ - Version: Bluetooth 5.3 Dual-Mode 802.11 a/b/g/n/ac/ax - Size: 23 x 23 x 3.0 mm - Power Supply: 1.05 V - 1.95 V - Interfaces: UART, PCM, I²S, PCIe - Profiles: HFP, A2DP, PBAP, HID, GATT, LE Audio, TCP, UDP, HTTP/HTTPS, MQTT - OS supported: Android, Linux
FSC-BT836B  - Chipset: Realtek RTL8761BTV - Version: Bluetooth 5.0 Dual Mode - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.3 V - Interfaces: UART, I²C, SPI - Profiles: SPP, HOGP, GATT - Certification: BQB, CE, FCC, TELEC, KC	FSC-BT1104QI  - Chipset: QCC3095 - Version: Bluetooth 5.4 - Size: 17 x 12 x 2.2 mm - Power Supply: 3.0 V - 4.6 V - Interfaces: UART, I²C, PCM/I²S, SPI, USB - Profiles: HFP, A2DP, AVRCP, PBAP, HID, SPP, LE-GATT - Codec: SBC, AAC, APT-X, LC3	FSC-BW236  - Chipset: Realtek RTL8720DN - Version: Bluetooth 5.0 802.11 a/b/g/n - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.0 V - 3.6 V - Interfaces: UART, I²C, SPI - Profiles: GATT, TCP, UDP, HTTP/HTTPS, MQTT - Certification: CE, FCC, IC, KC, TELEC - Frequencies: 2.4GHz & 5GHz Dual-Band	FSC-BW104  - Chipset: QCA6574 - Version: Bluetooth 5.0 Dual-Mode 802.11 a/b/g/n/ac - Size: 23.4 x 19.4 x 2.6 mm - Power Supply: 3.3 V - Interfaces: UART, GPIO, SDIO, PCM - Profiles: HFP, A2DP, AVRCP, PBAP, HID, GATT, TCP, UDP, HTTP/HTTPS, MQTT - OS supported: Android, Linux
FSC-BT901  - Chipset: CSR8811 - Version: Bluetooth 5.2 Dual-Mode - Size: 10 x 11.9 x 1.7 mm - Power Supply: 2.7 V - 3.6 V - Interfaces: UART, I²C, PCM/I²S - Profiles: A2DP, AVRCP, HFP, PBAP, HOGP, SPP, GATT - Certification: CE	FSC-BT1058  - Chipset: QCC5181 - Version: Bluetooth 5.4 - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.0 V - 4.6 V - Interfaces: UART, I²C, PCM/I²S, SPI, USB - Profiles: A2DP, AVRCP, HFP, HSP, HOGP, PBAP, SPP, GATT, LE Audio - Codec: SBC, AAC, APT-X, LDAC, LC3	FSC-BW246  - Chipset: Espressif ESP32 - Version: Bluetooth 4.2 Dual-Mode 802.11 b/g/n - Size: 13 x 26.9 x 2.2 mm - Power Supply: 2.3 V - 3.6 V - Interfaces: UART, I²C, SPI, PCM/I²S - Profiles: SPP, HID, GATT, TCP, UDP, HTTP, HTTPS, MQTT - Frequency: 2.4GHz Single-Band	FSC-BW121  - Chipset: Realtek RTL8821CS-VI-CG - Version: Bluetooth 5.3 Dual-Mode 802.11 a/b/g/n/ac - Size: 17 x 17 x 2.4 mm - Power Supply: 3.0 V - 3.6 V - Interfaces: UART, PCM, SDIO - Profiles: HFP, A2DP, AVRCP, PBAP, HID, GATT, TCP, UDP, HTTP/HTTPS, MQTT - OS supported: Linux, Android, FreeRTOS
FSC-BT909C  - Chipset: CSR8811 - Version: Bluetooth 5.2 Dual-Mode - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.3V - Tx Power: +18.5 dBm (Class 1) - Interfaces: UART, I²C - Profiles: SPP, GATT, HFP, A2DP, AVRCP - Certification: CE, FCC, IC, TELEC, KC	FSC-BT6038A  - Chipset: QCC3086 - Version: Bluetooth 5.4 - Size: 12 x 15 x 2.0 mm - Power Supply: 3.0 V - 4.6 V - Interfaces: UART, I²C, PCM/I²S, SPI, USB - Profiles: A2DP, AVRCP, HFP, SPP, GATT, LE Audio - Codec: SBC, APT-X, LC3	FSC-BW256B  - Chipset: FSC2088M40B - Version: Bluetooth 5.0 Dual-Mode 802.11 b/g/n/ac/ax - Size: 13 x 26.9 x 2.2 mm - Power Supply: 3.0 V - 3.6 V - Interfaces: UART, SPI, USB, SDIO, I²C - Profiles: SPP, GATT, TCP, UDP, HTTP/HTTPS, MQTT - Frequencies: 2.4GHz & 5GHz Dual-Band	FSC-BW5058MV  - Chipset: MT7921AEN - Version: Bluetooth 5.4 Dual-Mode 802.11 a/b/g/n/ac/ax - Size: 23 x 23 x 3.0 mm - Power Supply: 3.0 V - 3.6 V - Interfaces: UART, PCIe, PCM/I²S - Features: HFP, A2DP, PBAP, HID, GATT, LE Audio, TCP - OS supported: Linux, Android