

# EXTERNAL FILTER

Variable Frequency

## 变频缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



## DC/AC EXTERNAL FILTER Air


智能变频缸外过滤器

スーパー魚 好品質——源于专业专注 Professional focus

### Variable Frequency

- Multilayer Filtering Function, Separate
- Switch Control OF The UV STERILIZER.
- It Is Has The Feature Of High Efficiency.
- Big Capacity And Multi-functional.

Internal assembly optional



KY-1000Air



KY-1300Air



KY-1600Air

| MODEL                                                 | POWER CONSUMPTION             | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------------------------------|-------------------------------|-----------------|---------------------|---------------|-------------------------|
| KY-1000Air                                            | DC 12V 9.5W<br>AC 220V 9.5W   | 1000L/h         | 2.4M                | 250*250*380mm | 476*355*398mm (2Pcs)    |
| KY-1300Air                                            | DC 12V 12W<br>AC 220V 12W     | 1300L/h         | 2.5M                | 250*250*440mm | 476*355*448mm (2Pcs)    |
| KY-1600Air                                            | DC 12V 21.5W<br>AC 220V 21.5W | 1600L/h         | 2.7M                | 250*250*490mm | 476*355*468mm (2Pcs)    |
| VOLTAGE: AC 100-120V/220-240V      FREQUENCY: 50/60Hz |                               |                 |                     |               |                         |



# EXTERNAL FILTER

## Variable Frequency

### 变频缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



## DC/AC EXTERNAL FILTER Pro

### 智能变频缸外过滤器

スーパー魚 好品质 一源于专业专注  
Professional focus

### Variable Frequency

- Multilayer Filtering Function, Separate
- Switch Control Of The UV STERILIZER.
- It Is Has The Feature Of High Efficiency,
- Big Capacity And Multi-functional.

Internal assembly optional



Water filling start



KY-1000Pro



KY-1300Pro



KY-1600Pro

| MODEL                         | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-1000Pro                    | DC 12V 9.5W       | 1000L/h         | 2.4M                | 250*250*380mm | 476*355*398mm (2Pcs)    |
|                               | AC 220V 9.5W      |                 |                     |               |                         |
| KY-1300Pro                    | DC 12V 12W        | 1300L/h         | 2.5M                | 250*250*440mm | 476*355*448mm (2Pcs)    |
|                               | AC 220V 12W       |                 |                     |               |                         |
| KY-1600Pro                    | DC 12V 21.5W      | 1600L/h         | 2.7M                | 250*250*490mm | 476*355*468mm (2Pcs)    |
|                               | AC 220V 21.5W     |                 |                     |               |                         |
| VOLTAGE: AC 100-120V/220-240V |                   |                 | FREQUENCY: 50/60Hz  |               |                         |



# EXTERNAL FILTER

Variable Frequency

## 变频缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



## DC/AC EXTERNAL FILTER Plus

智能变频缸外过滤器

スーパー魚 好品质 一流专业专注 Professional focus 鱼缸智能

### Variable Frequency

- Multilayer Filtering Function, Separate
- Switch Control Of The UV STERILIZER.
- It Is Has The Feature Of High Efficiency,
- Big Capacity And Multi-functional.

Internal assembly optional



Touch switch design



KY-1600Plus



KY-2000Plus



KY-2500Plus

| MODEL                                   | POWER CONSUMPTION         | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE       | OUTER BOX SIZE(PCS/CTN) |
|-----------------------------------------|---------------------------|-----------------|---------------------|--------------------|-------------------------|
| KY-1600Plus                             | DC 12V 10W<br>AC 220V 10W | 1600L/h         | 2.7M                | 250*250*380mm      | 476*355*398mm (2Pcs)    |
| KY-2000Plus                             | DC 12V 14W<br>AC 220V 14W | 2000L/h         | 3.0M                | 250*250*440mm      | 476*355*448mm (2Pcs)    |
| KY-2500Plus                             | DC 12V 22W<br>AC 220V 22W | 2500L/h         | 3.2M                | 250*250*490mm      | 476*355*498mm (2Pcs)    |
| VOLTAGE: DC12V / AC 100-120V / 220-240V |                           |                 |                     | FREQUENCY: 50/60Hz |                         |



# EXTERNAL Variable Frequency FILTER

## 变频缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



## DC/AC EXTERNAL FILTER Plus-B

### 智能变频缸外过滤器

スーパー魚 好品质 一高于专业专注 Professional focus  
超鱼智能

### Variable Frequency

- Multilayer Filtering Function, Separate
- Switch Control Of The UV STERILIZER.
- It Is Has The Feature Of High Efficiency.
- Big Capacity And Multi-functional.

Internal assembly optional



Touch switch design



KY-1600 Plus-B



KY-2000 Plus-B



KY-2500 Plus-B

| MODEL                                   | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE       | OUTER BOX SIZE(PCS/CTN) |
|-----------------------------------------|-------------------|-----------------|---------------------|--------------------|-------------------------|
| KY-1600Plus-B                           | DC 12V 18W        | 1600L/h         | 2.7M                | 250*250*380mm      | 476*355*398mm (2Pcs)    |
|                                         | AC 220V 18W       |                 |                     |                    |                         |
| KY-2000Plus-B                           | DC 12V 22W        | 2000L/h         | 3.0M                | 250*250*440mm      | 476*355*448mm (2Pcs)    |
|                                         | AC 220V 22W       |                 |                     |                    |                         |
| KY-2500Plus-B                           | DC 12V 28W        | 2500L/h         | 3.2M                | 250*250*490mm      | 476*355*468mm (2Pcs)    |
|                                         | AC 220V 28W       |                 |                     |                    |                         |
| VOLTAGE: DC12V / AC 100-120V / 220-240V |                   |                 |                     | FREQUENCY: 50/60Hz |                         |



# EXTERNAL FILTER

Super Muting

## 静音缸外过滤器 FILTER



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



### EXTERNAL FILTER Pro

静音缸外过滤器

#### Super Muting

- Multilayer Filtering Function, Separate
- It Has The Feature Of High Efficiency,
- Big Capacity And Multi-functional.

Internal assembly optional  
可配UV灯或加热棒



Water flow control valve



KY-1000



KY-1300



KY-1600

| MODEL                                                 | POWER CONSUMPTION             | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------------------------------|-------------------------------|-----------------|---------------------|---------------|-------------------------|
| KY-1000                                               | DC 12V 9.5W<br>AC 220V 9.5W   | 1000L/h         | 2.4M                | 250*250*380mm | 00*00*00mm (0Pcs)       |
| KY-1300                                               | DC 12V 12W<br>AC 220V 12W     | 1300L/h         | 2.5M                | 250*250*440mm |                         |
| KY-1600                                               | DC 12V 21.5W<br>AC 220V 21.5W | 1600L/h         | 2.7M                | 250*250*490mm |                         |
| VOLTAGE: AC 100-120V/220-240V      FREQUENCY: 50/60Hz |                               |                 |                     |               |                         |



# EXTERNAL FILTER

Turtle tank dedicated

## 乌龟缸专用缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant




### EXTERNAL FILTER Pro

乌龟缸专用缸外过滤器

#### Super Muting

- Multilayer Filtering Function, Separate
- It Has The Feature Of High Efficiency,
- Big Capacity And Multi-functional.

Internal assembly optional  
可配UV灯或加热棒

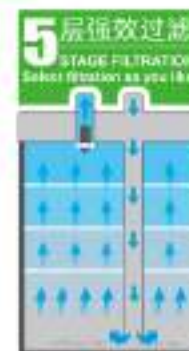

Water flow control valve



KY-1000T

KY-1300T

KY-1600T

| MODEL                                                 | POWER CONSUMPTION             | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------------------------------|-------------------------------|-----------------|---------------------|---------------|-------------------------|
| KY-1000T                                              | DC 12V 9.5W<br>AC 220V 9.5W   | 1000L/h         | 2.4M                | 250*250*380mm | 00*00*00mm (0Pcs)       |
| KY-1300T                                              | DC 12V 12W<br>AC 220V 12W     | 1300L/h         | 2.5M                | 250*250*440mm |                         |
| KY-1600T                                              | DC 12V 21.5W<br>AC 220V 21.5W | 1600L/h         | 2.7M                | 250*250*490mm |                         |
| VOLTAGE: AC 100-120V/220-240V      FREQUENCY: 50/60Hz |                               |                 |                     |               |                         |



# EXTERNAL Turtle tank dedicated FILTER

## 乌龟缸专用缸外过滤器



- Multi-stage filtration
- Quiet and extremely reliable
- Suitable for freshwater and marine aquarium
- The rotor is longer service life and abrasion resistant



### EXTERNAL FILTER Pro

#### 乌龟缸专用缸外过滤器

スーパー魚 好品质 源于专业专注 Professional focus

#### Super Muting

- Multilayer Filtering Function, Separate
- It Has The Feature Of High Efficiency,
- Big Capacity And Multi-functional.

Internal assembly optional  
可配UV灯或加热棒



| MODEL                                   | POWER CONSUMPTION         | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE       | OUTER BOX SIZE(PCS/CTN) |
|-----------------------------------------|---------------------------|-----------------|---------------------|--------------------|-------------------------|
| KY-1600T1                               | DC 12V 10W<br>AC 220V 10W | 1600L/h         | 2.7M                | 250*250*380mm      | 00*00*00mm (0Pcs)       |
| KY-2000T1                               | DC 12V 14W<br>AC 220V 14W | 2000L/h         | 3.0M                | 250*250*440mm      |                         |
| KY-2500T1                               | DC 12V 22W<br>AC 220V 22W | 2500L/h         | 3.2M                | 250*250*490mm      |                         |
| VOLTAGE: DC12V / AC 100-120V / 220-240V |                           |                 |                     | FREQUENCY: 50/60Hz |                         |

# INTERNAL Turtle tank dedicated FILTER

## 乌龟缸专用缸内过滤器



- Low water level rain filtration, powerful horsepower, bottom suction.
- Cultivate bacteria and filter for long-lasting water purification.



# Filter 低水位多功能过滤器

## LOW WATER & MULTIFUNCTION

本品为低水位多功能过滤器，适用于水栖型、沼泽型等水位较低饲养箱，及小型水族箱过滤。立体景观设计的低密度饲养缸。低水位雨淋过滤，提高溶氧量，马力强劲，底部吸水，能快速吸走粪便残渣，培菌过滤，长效净水。

This product is a low water level multifunctional filter, suitable for aquatic type, Swamp type and other low water level tanks, and small aquarium filtration. Low-density rearing tanks with three-dimensional landscape design. Low water level rainfall filtration, improve dissolved oxygen, strong horsepower, bottom suction, can quickly suck away the fecal residue. The bottom suction can quickly suck away the fecal residue, cultivate bacteria filtration, long-lasting water purification.

スーパー魚 好品质——源于专业专注 Professional focus



KY-201F



KY-301F



KY-301F

| MODEL   | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|---------|-------------------|-----------------|---------------------|--------------|-------------------------|
| KY-201F | 8W                | 500L/h          | 0.8M                | 138*57*170mm | 00*00*00mm (0Pcs)       |
| KY-301F | 8W                | 500L/h          | 0.8M                | 138*57*220mm |                         |
| KY-301F | 8W                | 500L/h          | 0.8M                | 138*57*270mm |                         |

VOLTAGE: AC 220-240V,50/60Hz FREQUENCY: 50/60Hz




# INTERNAL Multi-function Internal Corner FILTER

## 多功能直角过滤器



- Internal corner installation
- Ideal for freshwater & marine aquarium
- Easy installation & maintenance
- Strong filtration capacity



Quiet flow Oxygenating Rain directed Circulating

# MULTI-FUNCTION INTERNAL CORNER FILTER Pro

## 多功能直角过滤器

- 内角安装不占空间
- 淡水和海洋鱼缸通用
- 易于安装和维护
- 强大的过滤能力
- Internal corner installation
- Ideal for freshwater & marine aquarium
- Easy installation & maintenance
- Strong filtration capacity



低水位水循环  
Low water level  
water circulation



万向喷水嘴  
Multidirectional water spray



KY-C220

KY-C300

| MODEL                                | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|--------------------------------------|-------------------|-----------------|---------------------|--------------|-------------------------|
| KY-C220                              | 2W                | 220L/h          | 0.6M                | 73*53*163mm  | 00*00*00mm (0Pcs)       |
| KY-C300                              | 3.5W              | 300L/h          | 0.8M                | 73*53*248mm  |                         |
| VOLTAGE: 220-230V FREQUENCY: 50/60Hz |                   |                 |                     |              |                         |

スーパー魚 好品质 源于专业专注  
Professional focus



# EXTERNAL FILTER

Turtle tank dedicated

## 乌龟缸专用缸外过滤器




- Simple appearance , practical and good sealing
- Strong horsepower , large flow , good filtration effect
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble
- With automatically power off once no water function



# HANG ON FILTER

乌龟缸专用缸外过滤器

Sound effect of new shape outlet and underwater pump!  
Contains multiple filter material packages  
Transparent barrel design



Porous rain shower



Water flow control valve

| MODEL                         | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-300T                       | 4.5W              | 300L/h          | 1.2M                | 120*86*175mm  | 540*310*285mm (8Pcs)    |
| KY-400T                       | 5W                | 400L/h          | 1.2M                | 120*86*210mm  | 540*310*285mm (8Pcs)    |
| KY-500T                       | 6W                | 500L/h          | 1.5M                | 190*100*265mm | 620*430*340mm (8Pcs)    |
| KY-600T                       | 7W                | 600L/h          | 1.5M                | 190*100*300mm | 620*430*340mm (8Pcs)    |
| VOLTAGE: AC 100-120V/220-240V |                   |                 | FREQUENCY: 50/60Hz  |               |                         |



# HANG ON The depth filtration FILTER

## 壁挂式缸外过滤器



- Simple appearance , practical and good sealing
- Strong horsepower , large flow , good filtration effect
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble
- With automatically power off once no water function



# Mini 壁挂式过滤器

## EXTERNAL HANGING-ON FILTER

Sound effect of new shape outlet and underwater pump!



Universal wave making



Porous rain shower




| MODEL                                                 | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-300                                                | 4.5W              | 300L/h          | 1.2M                | 120*86*175mm  | 540*330*285mm (8Pcs)    |
| KY-400                                                | 5W                | 400L/h          | 1.2M                | 120*86*210mm  | 540*330*285mm (8Pcs)    |
| KY-500                                                | 6W                | 500L/h          | 1.5M                | 190*100*265mm | 620*430*340mm (8Pcs)    |
| KY-600                                                | 7W                | 600L/h          | 1.5M                | 190*100*300mm | 620*430*340mm (8Pcs)    |
| VOLTAGE: AC 100-120V/220-240V      FREQUENCY: 50/60Hz |                   |                 |                     |               |                         |

スーパー魚 好品质——源于专业专注 Professional focus



# HANG ON The depth filtration FILTER

## 壁挂式缸外过滤器

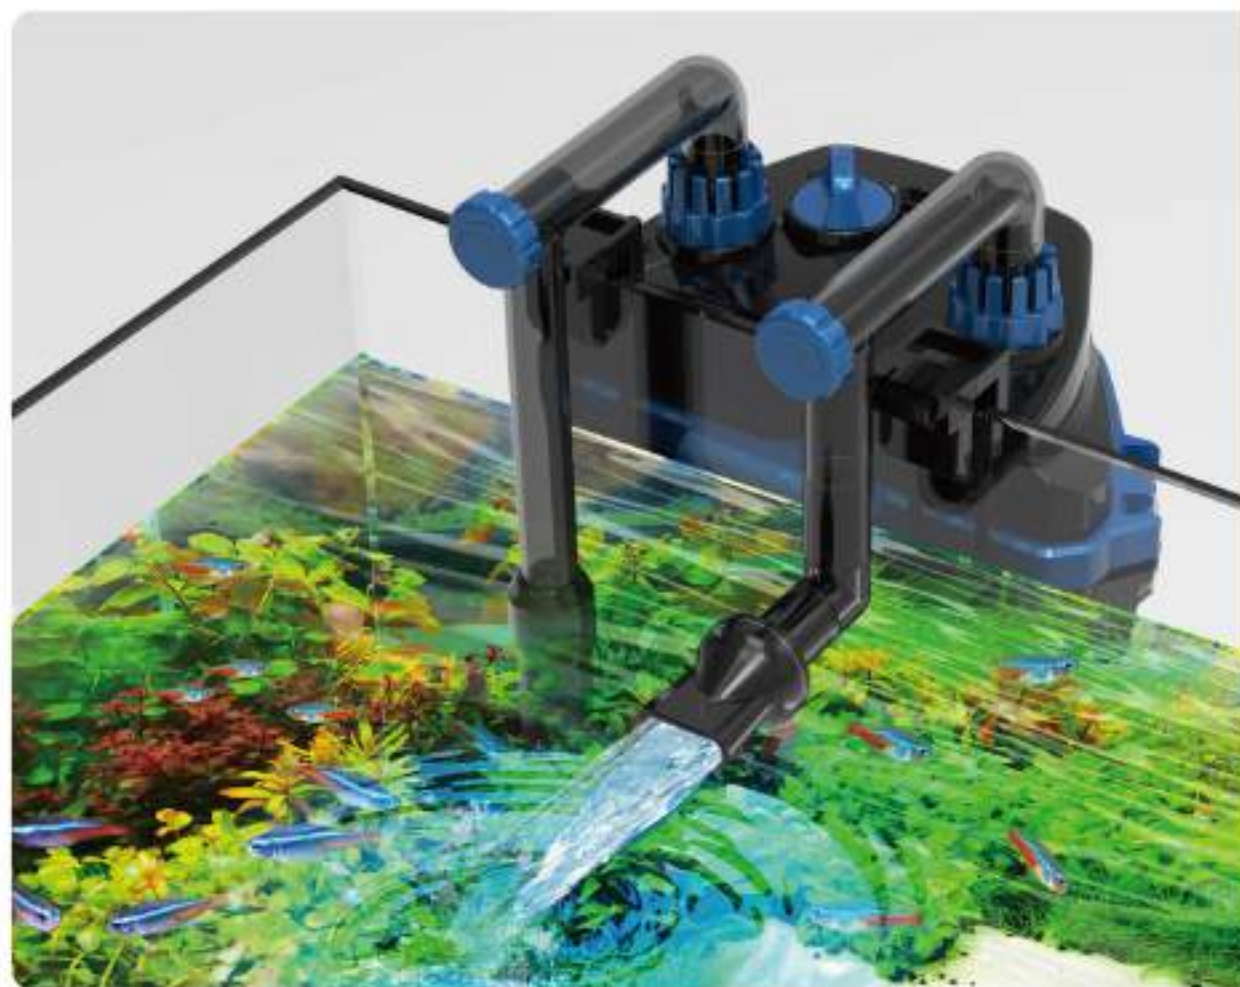

- Simple appearance , practical and good sealing
- Strong horsepower , large flow , good filtration effect
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble
- With automatically power off once no water function




# Pro 壁挂式过滤器

## EXTERNAL HANGING-ON FILTER

Sound effect of new shape outlet and underwater pump!



Universal wave-making



Porous rain shower



KY-B300Pro

KY-B400Pro

KY-B500Pro

KY-B600Pro

| MODEL                         | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-B300Pro                    | 4.5W              | 300L/h          | 1.2M                | 120*86*175mm  | 540*310*285mm (8Pcs)    |
| KY-B400Pro                    | 5W                | 400L/h          | 1.2M                | 120*86*210mm  | 540*310*285mm (8Pcs)    |
| KY-B500Pro                    | 6W                | 500L/h          | 1.5M                | 190*100*265mm | 620*430*340mm (8Pcs)    |
| KY-B600Pro                    | 7W                | 600L/h          | 1.5M                | 190*100*300mm | 620*430*340mm (8Pcs)    |
| VOLTAGE: AC 100-120V/220-240V |                   |                 | FREQUENCY: 50/60Hz  |               |                         |



# HANG ON The depth filtration 壁掛式缸外过滤器 FILTER



- Simple appearance, practical and good sealing
- Strong horsepower, large flow, good filtration effect
- Small size, does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble
- With automatically power off once no water function



## HANG ON FILTER Pro

The depth filtration 深度过滤

Sound effect of new shape outlet and underwater pump!

Contains multiple filter material packages

Transparent barrel design



Universal water making



Porous rain shower



KY-300Pro



KY-400Pro



KY-500Pro



KY-600Pro

| MODEL                         | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-300Pro                     | 4.5W              | 300L/h          | 1.2M                | 120*86*175mm  | 540*310*285mm (8Pcs)    |
| KY-400Pro                     | 5W                | 400L/h          | 1.2M                | 120*86*210mm  | 540*310*285mm (8Pcs)    |
| KY-500Pro                     | 6W                | 500L/h          | 1.5M                | 190*100*265mm | 620*430*340mm (8Pcs)    |
| KY-600Pro                     | 7W                | 600L/h          | 1.5M                | 190*100*300mm | 620*430*340mm (8Pcs)    |
| VOLTAGE: AC 100-120V/220-240V |                   |                 | FREQUENCY: 50/60Hz  |               |                         |



# HANG ON The depth filtration

## 壁挂式缸外过滤器 FILTER



- Simple appearance , practical and good sealing
- Strong horsepower , large flow , good filtration effect
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble
- With automatically power off once no water function



## HANG ON FILTER Plus

The depth filtration 深度过滤  
Sound effect of new shape outlet and underwater pump!  
Contains multiple filter material packages  
Transparent barrel design  
Upgrade independent filter material grid

スーパー魚 好品质 源于专业专注  
精益求精 Professional focus



Universal wave making



Porous rain shower



Filter material grid



KY-300Plus



KY-400Plus



KY-500Plus



KY-600Plus

| MODEL                                                 | POWER CONSUMPTION | MAX. WATER FLOW | MAXIMUM HEAD HEIGHT | PRODUCT SIZE  | OUTER BOX SIZE(PCS/CTN) |
|-------------------------------------------------------|-------------------|-----------------|---------------------|---------------|-------------------------|
| KY-300Plus                                            | 4.5W              | 300L/h          | 1.2M                | 120*86*175mm  | 540*310*285mm (8Pcs)    |
| KY-400Plus                                            | 5W                | 400L/h          | 1.2M                | 120*86*210mm  | 540*310*285mm (8Pcs)    |
| KY-500Plus                                            | 6W                | 500L/h          | 1.5M                | 190*100*285mm | 620*430*340mm (8Pcs)    |
| KY-600Plus                                            | 7W                | 600L/h          | 1.5M                | 190*100*300mm | 620*430*340mm (8Pcs)    |
| VOLTAGE: AC 100-120V/220-240V      FREQUENCY: 50/60Hz |                   |                 |                     |               |                         |



# FRONT FACING FILTER

The depth filtration

## 专业级前置过滤系统 FILTER



包含以下配件  
Includes the following accessories



12/16/20mm 进出水接头  
connector



生化过滤棉  
Biochemical filter sponge



培菌生化球  
Bacteria Biochemical Balls



滤棉连杆  
Connection Rod

- Simple appearance , practical and good sealing
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble



# FRONT FACING FILTER Pro

PROFESSIONAL FILTRATION SYSTEM A SERIES 专业级前置过滤系统 A 系列

スーパ一魚 好品质 源于专业专注 Professional focus 品质 智慧

本产品需与缸外过滤桶连接使用,作用是通过增加一道过滤,达到更有效地过滤水中的杂质,保持缸外过滤桶内滤材的清洁。  
单独使用时,请另连接水泵将水流经过本过滤器同样可达到过滤与净化水质。  
It's better to connect the prefilter with the external filter. Because the water is put into the prefilter first, it's easy to filter water impurities, and keep the filter media of the canister cleaner.  
When used alone, please connect another water pump to pass the water through this filter, which can also achieve filtration and purification of water quality.



搭配缸外过滤桶使用  
Used together with out-of-cylinder filter



搭配水泵使用  
Connect the water pump separately



KY-200A



KY-240A



KY-300A

| MODEL   | DIMENSION OUTLET | FOR TANK SIZE(L) | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|---------|------------------|------------------|--------------|-------------------------|
| KY-200A | ø12/16/20mm      | 600-800L         | ø170*220mm   | 540*310*265mm (4Pcs)    |
| KY-240A | ø12/16/20mm      | 800-1000L        | ø170*265mm   | 540*310*265mm (4Pcs)    |
| KY-300A | ø12/16/20mm      | 1000-1200L       | ø170*310mm   | 620*430*340mm (4Pcs)    |



# FRONT FACING FILTER

The depth filtration

## 专业级前置过滤系统 FILTER



- Simple appearance, practical and good sealing
- Small size, does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble



# FRONT FACING FILTER Pro

PROFESSIONAL FILTRATION SYSTEM B SERIES

## 专业级前置过滤系统 B 系列

スーパー魚 好品质——源于专业专注 Professional focus

本产品需与缸外过滤器连接使用,作用是通过增加一道过滤,达到更有效地过滤水中的杂质,保持缸外过滤器内滤材的清洁。  
单独使用时,请另连接水泵将水流经过本过滤器同样可达到过滤与净化水质。  
It's better to connect the prefilter with the external filter. Because the water is put into the prefilter first, it's easy to filter water impurities, and keep the filter media of the canister cleaner.  
When used alone, please connect another water pump to pass the water through this filter, which can also achieve filtration and purification of water quality.



搭配缸外过滤器使用  
Used together with out-of-cylinder filter



搭配水泵使用  
Connect the water pump separately



KY-200B



KY-240B



KY-300B

| MODEL   | DIMENSION OUTLET | FOR TANK SIZE(L) | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|---------|------------------|------------------|--------------|-------------------------|
| KY-200B | ø12/16/20mm      | 600-800L         | ø170*220mm   | 540*310*285mm (4Pcs)    |
| KY-240B | ø12/16/20mm      | 800-1000L        | ø170*265mm   | 540*310*285mm (4Pcs)    |
| KY-300B | ø12/16/20mm      | 1000-1200L       | ø170*310mm   | 620*430*340mm (4Pcs)    |



# FRONT FACING FILTER

The depth filtration

## 专业级前置过滤系统 FILTER



包含以下配件  
Includes the following accessories



上部生化过滤棉  
Biochemical filter sponge



底部生化过滤棉  
Biochemical filter sponge



滤棉连杆  
Connection Rods

- Simple appearance , practical and good sealing
- Small size , does not occupy extra space
- The water inlet and outlet components are exquisite and easy to disassemble



# FRONT FACING FILTER Pro

PROFESSIONAL FILTRATION SYSTEM C SERIES

## 专业级前置过滤系统 C 系列

スーパー魚 好品质 源于专业专注  
Professional focus

本产品需与缸外过滤器连接使用,作用是增加一道过滤,达到更有效地过滤水中的杂质,保持缸外过滤器内滤材的清洁。  
单独使用时,请另连接水泵将水经过本过滤器同样可达到过滤与净化水质。  
It's better to connect the prefilter with the external filter. Because the water is put into the prefilter first, it's easy to filter water impurities, and keep the filter media of the canister cleaner.  
When used alone, please connect another water pump to pass the water through this filter, which can also achieve filtration and purification of water quality.



搭配缸外过滤器使用  
Use it together with out-of-cylinder filter



搭配水泵使用  
Connect the water pump separately



KY-200C



KY-240C



KY-300C

| MODEL   | DIMENSION<br>OUTLET | FOR TANK<br>SIZE(L) | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|---------|---------------------|---------------------|-----------------|----------------------------|
| KY-200C | ø12/16/20mm         | 600-800L            | ø170*220mm      | 540*310*285mm (4Pcs)       |
| KY-240C | ø12/16/20mm         | 800-1000L           | ø170*265mm      | 540*310*285mm (4Pcs)       |
| KY-300C | ø12/16/20mm         | 1000-1200L          | ø170*310mm      | 620*430*340mm (4Pcs)       |



SELF SUCTION SURFACE SKIMMER

# SKIMMER 自吸式除滤器



**360°** 全方位  
防急分流



Quiet Flow



Super Filter



Fresh Water

## FRONT FACING FILTER Pro

PROFESSIONAL FILTRATION SYSTEM  
专业级前置过滤系统 C SERIES 款系列

スーパー魚 好品质——源于专业专注  
Professional focus

### 产品特点:

- 浮台设有防撞防止小鱼吸入。
- 内配高密度过滤棉除油同时除杂质。
- 自带除油膜器无需另接水泵或过滤器。
- 配静音电机节能环保。
- 设有流量阀可随意调节流量。
- 独特360度旋转防急分流。

### FEATURE:

- Equipped with floating platform guardrail Prevent small fish from being inhaled.
- Equipped with high-density filter cotton, Remove oil and remove impurities.
- Self suction Surface skimmer, don't connected to the pump or the filter.
- Equipped with mute motor, energy saving and high efficiency.
- Equipped with flow valve, can adjust the flow.
- Unique 360 degree rotating anti jet baffle.



随水位自动升降  
**40mm**



KY-250

| MODEL  | POWER | QMAX OUTPUT<br>L/h | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|--------|-------|--------------------|-----------------|----------------------------|
| KY-250 | 3.5W  | 250L/h             | 45*35*135mm     | 00*00*00mm (0Pcs)          |

额定电源 Voltage: Input AC 220-240V 50/60Hz



# VARIABLE FREQUENCY SUBMERSIBLE Pond PUMP

## 大流量变频池塘泵



- High efficiency and energy-saving frequency conversion motor is adopted to save energy and low consumption.
- Strong water flow output, suitable for garden pond and Koi pond.
- High wear resistant ceramic cooling bearing, long service life.
- The diameter of the particles is 6 mm



Quiet flow



Multiple protection



No slip



High efficiency



Fresh/roasted water

## POND PUMP

### KY系列大流量变频水泵

VARIABLE FREQUENCY WATER PUMP

Pro

- 采用先进的智能变频高效节能技术，有效节能70%
- 超大流量，超静音，使用寿命长。
- 智能恒流变频无需设定。
- 多重安全保护，（缺水保护/过载保护/短路保护）自动故障检测。
- 高强度耐磨陶瓷轴及轴承套，适用于淡水和海水使用。
- 广泛应用于池塘，大型水族馆，蓄水池，游泳池.....

- It uses advance intelligent AC energy-saving technology, 70% high-efficient energy saving, super silent, long service life.
- Water shortage protection, Overload protection, Automatic fault detection, Automatic start, no need to replug the power plug
- It can be used in Sea Water and Fresh Water
- The use of high strength wear resistant and corrosion resistant ceramic shaft ceramic set, long service life.
- These adjustable function, users can adjust the output according to their needs.
- It has memory function, every time restart the power will have the same parameters as before

スーパー魚  
造魚 智能

精品——源于专业专注  
Professional focus



KY-PP10 Pro / KY-PP20 Pro / KY-PP30 Pro



KY-PP40 Pro / KY-PP50 Pro  
KY-PP60 Pro / KY-PP70 Pro

| MODEL       | POWER | QMAX OUTPUT<br>M <sup>3</sup> /H | HMAX HEAD<br>M | PRODUCT<br>OUTLET | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|-------------|-------|----------------------------------|----------------|-------------------|-----------------|----------------------------|
| KY-PP10 Pro | 130W  | 20 M <sup>3</sup> /H             | 2.0m           | ø75mm             | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP20 Pro | 170W  | 26 M <sup>3</sup> /H             | 2.0m           | ø75mm             | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP30 Pro | 210W  | 32 M <sup>3</sup> /H             | 2.3m           | ø75mm             | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP40 Pro | 220W  | 38 M <sup>3</sup> /H             | 2.8m           | ø110mm            | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP50 Pro | 300W  | 45 M <sup>3</sup> /H             | 3.5m           | ø110mm            | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP60 Pro | 350W  | 52 M <sup>3</sup> /H             | 3.8m           | ø110mm            | ø210*370mm      | 516*315*295mm (2Pcs)       |
| KY-PP70 Pro | 480W  | 72 M <sup>3</sup> /H             | 4.5m           | ø110mm            | ø210*370mm      | 516*315*295mm (2Pcs)       |

额定电压 Voltage: AC 110-240V 50/60Hz




# VARIABLE FREQUENCY AMPHIBIOUS Pond PUMP

水陆两用智能变频水泵

for filters and waterfalls

Powerful and economical  
Low maintenance

70%  
ENERGY SAVING

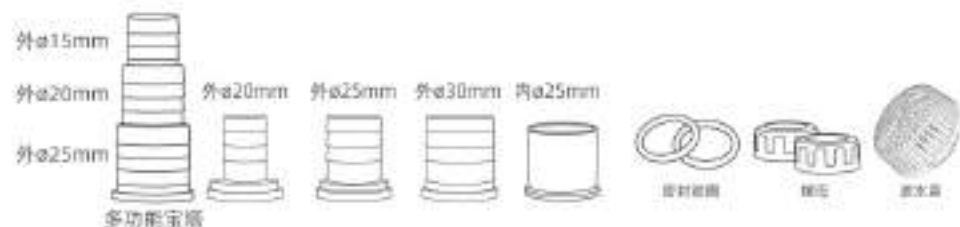

## POND PUMP

KY系列大流量变频水泵

VARIABLE FREQUENCY WATER PUMP

Pro

- 采用先进的智能变频高效节能技术，有效节能70%
- 超大流量，超静音，使用寿命长。
- 智能恒流变频无需设定。
- 多重安全保护。（缺水保护/过载保护/短路保护）自动故障检测。
- 高强度耐磨陶瓷密封及陶瓷套，适用于淡水和海水使用。
- 广泛应用于池塘、大型水族馆、蓄养池、游泳池……。

- It uses advanced intelligent AC energy-saving technology, 70% high-efficient energy saving, super silent, long service life.
- Water shortage protection, Overload protection, Automatic fault detection, Automatic start, no need to re-plug the power plug.
- It can be used in Sea Water and Fresh Water.
- The use of high strength wear resistant and corrosion resistant ceramic shaft ceramic set, long service life.
- Three adjustable function, users can adjust the output according to their needs.
- It has memory function, every time restart the power will have the same parameters as before.



KY-AC1000  
KY-AC2000  
KY-AC3000

KY-AC5000  
KY-AC8000

KY-AC10000  
KY-AC13000

| MODEL      | POWER | QMAX OUTPUT<br>L/h | HMAX HEAD<br>M | PRODUCT<br>OUTLET | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|------------|-------|--------------------|----------------|-------------------|-----------------|----------------------------|
| KY-AC1000  | 15W   | 1000L/h            | 3.0m           | 1/2"10mm          | 136*62*114mm    | 00*00*00mm (0Pcs)          |
| KY-AC2000  | 20W   | 2000L/h            | 3.9m           | 1/2"10mm          | 136*62*114mm    |                            |
| KY-AC3000  | 26W   | 3000L/h            | 4.5m           | 1/2"10mm          | 145*73*125mm    |                            |
| KY-AC5000  | 50W   | 5000L/h            | 6.0m           | 20/25/30mm        | 188*95*160mm    |                            |
| KY-AC8000  | 65W   | 8000L/h            | 6.9m           | 20/25/30mm        | 188*95*160mm    |                            |
| KY-AC10000 | 80W   | 10000L/h           | 6.0m           | 25/32/40mm        | 230*112*183mm   |                            |
| KY-AC13000 | 95W   | 13000L/h           | 6.8m           | 25/32/40mm        | 230*112*183mm   |                            |

额定电源 Voltage: AC 110-240V 50/60Hz

スーパー魚  
專業品牌

好品质——源于专业专注  
Professional focus





# DC Pond PUMP

VARIABLE FREQUENCY

AMPHIBIOUS

水陆两用智能变频水泵

for filters and  
waterfalls

Powerful and  
economical  
Low maintenance



## DC POND PUMP

KY系列大流量变频水泵

VARIABLE FREQUENCY WATER PUMP

Pro

- 采用先进的智能变频高节能技术，有效节能70%。
- 超大流量，超静音，使用寿命长。
- 智能恒流变频无级调速。
- 多重安全保护，（缺水保护/过载保护/短路保护）自动故障检测。
- 高强度耐磨陶瓷轴及陶瓷套，适用于淡水和海水使用。
- 广泛应用于池塘、大型水族箱、蓄水池、游泳池……。

- It uses advanced intelligent AC energy-saving technology, 70% high-efficient energy saving, super silent, long service life.
- Water shortage protection, Overload protection, Automatic fault detection, Automatic start, no need to re-plug the power plug.
- It can be used in Sea Water and Fresh Water.
- The use of high strength wear resistant and corrosion resistant ceramic shaft ceramic set, long service life.
- Three adjustable function, users can adjust the output according to their needs.
- It has memory function, every time restart the power will have the same parameters before.



スーパー魚

高品质 源于专业专注  
Professional focus



KY-AC1500  
KY-AC2500  
KY-AC4000

KY-AC6000  
KY-AC9000

KY-AC12000  
KY-AC15000

| MODEL      | POWER | QMAX OUTPUT<br>L/h | HMAX HEAD<br>M | PRODUCT<br>OUTLET | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|------------|-------|--------------------|----------------|-------------------|-----------------|----------------------------|
| KY-DC1500  | 22W   | 1500L/h            | 3.6M           | 16/19mm           | 136*62*114mm    | 00*00*00mm (0Pcs)          |
| KY-DC2500  | 28W   | 2500L/h            | 3.9M           | 16/19mm           | 136*62*114mm    |                            |
| KY-DC4000  | 41W   | 4000L/h            | 3.5M           | 16/19mm           | 145*73*125mm    |                            |
| KY-DC6000  | 50W   | 6000L/h            | 3.6M           | 20/25/30mm        | 188*95*160mm    |                            |
| KY-DC9000  | 68W   | 9000L/h            | 4.3M           | 20/25/30mm        | 188*95*160mm    |                            |
| KY-DC12000 | 85W   | 12000L/h           | 5.1M           | 25/32/40mm        | 230*112*183mm   |                            |
| KY-DC15000 | 98W   | 15000L/h           | 5.7M           | 25/32/40mm        | 230*112*183mm   |                            |

额定电源 Voltage: Input AC110-240V 50/60Hz :Output : DC24V



## 水陆两用智能变频水泵

Powerful and  
economical  
Low maintenance



## DC VARIABLE FREQUENCY WATER PUMP

### 水陆两用智能变频水泵

Powerful and  
economical  
fast construction



### 結構設計

### Professional focus

\_\_\_\_\_



© 2006 The Authors  
Journal compilation © 2006 Blackwell Publishing Ltd

[illegible]



# UV PondPUMP

紫外线杀菌 智能变频水泵

for filters and  
waterfalls

Powerful and  
economical  
Low maintenance



- Unique 360 degree rotatable body design for ideal water direction
- Strong sterilization; efficiently remove algae, deodorant, purifying water quality
- Waterproof and radiation
- Suitable for pond, and aquarium, fresh water/saltwater



## ULTRA VIOLET

VARIABLE FREQUENCY WATER PUMP  
紫外线杀菌 智能变频水泵

スーパー魚 好品质 源于专业专注  
Professional focus



| MODEL    | POWER | QMAX OUTPUT<br>L/h | HMAX HEAD<br>M | PRODUCT<br>OUTLET | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PC5/CTN) |
|----------|-------|--------------------|----------------|-------------------|-----------------|----------------------------|
| UV-1000  | 12W   | 1000L/h            | 1.5M           | 16/18mm           | 136*62*114mm    |                            |
| UV-1200  | 15W   | 1000L/h            | 2.7M           | 16/20mm           | 136*62*114mm    |                            |
| UV-2000  | 23W   | 2000L/h            | 3.5M           | 16/20mm           | 145*73*125mm    |                            |
| UV-3000  | 27W   | 3000L/h            | 4.3M           | 16/20mm           | 188*95*160mm    |                            |
| UV-5000  | 59W   | 5000L/h            | 4.4M           | 25/32/40mm        | 188*95*160mm    |                            |
| UV-8000  | 61W   | 8000L/h            | 4.7M           | 25/32/40mm        | 230*112*183mm   |                            |
| UV-13000 | 91W   | 13000L/h           | 6.2M           | 25/32/40mm        | 230*112*183mm   |                            |
| UV-18000 | 93W   | 18000L/h           | 6.4M           | 25/32/40mm        | 230*112*183mm   |                            |

额定电压 Voltage: Input AC110-240V 50/60Hz :Output DC24V



# Smart Auto

## Automatic Top Off

### 智能鱼缸补水器

Quick and easy installation

Audible alert will quickly notify you if there is an issue with the top off

Comes complete with all accessories



The SMART AUTO AUTOMATIC TOP OFF is a must-have for aquarium keepers that want to maintain a consistent water level. Ideal for sumps, rimless or all-in-one aquariums. This sleek ATO is easy to install and drastically reduces maintenance and hassle, keeping aquariums topped off. The quality powerful magnet will securely hold the optical sensor on aquarium thicknesses up to 1/4" or 6mm, making it ideal for almost all applications.

该智能补水器是一种用于精确调节的微型光学红外传感器补水器。它会检测并自动补充水位到设置的位置。水位的上下波动不超过3mm,它的优点是水量波动较小,适合于中小型水族箱。它通过两个磁铁进行吸附于玻璃缸上,可以方便、安全地安装在鱼缸壁,无论是海水或淡水都可以使用,同时它内置报警装置,可以为您提供更加的安全性。

# Smart Auto Pro

Automatic Top Off 智能鱼缸补水器

スーパー魚 好品质 一源于专业专注 Professional focus 精品鱼缸



Comes complete with the following components. 包含以下组件



| MODEL                                                  | POWER | GMAX OUTPUT<br>L/h | HMAX HEAD<br>M | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|--------------------------------------------------------|-------|--------------------|----------------|-----------------|----------------------------|
| UV-1000                                                | 6W    | 280L/h             | 2.0M           | 45*45*47mm      |                            |
| 额定电源 Voltage: Input AC100-240V 50/60Hz : Utput : DC24V |       |                    |                |                 |                            |



# ULTRA VIOLET UV-北极光

## 紫外线杀菌潜水灯

# GERMICIDAL LAMP



- Strong sterilization, efficiently remove algae, deodorant, purifying water quality
- Perfect waterproof
- UV bulb and independent electronic ballast included



EASY OPERATION



TIMING FUNCTION



UV GERMICIDAL



Freshwater

UV- 北极光

KY系列紫外线杀菌潜水灯  
ULTRA VIOLET GERMICIDAL LAMP

- 水族杀菌除藻装置设计
- 有效杀灭有害病菌，预防疾病
- 净化水质，抑制藻类滋生
- 采用特级石英玻璃，杀菌更高效
- 内置控制器分体设计，产品尺寸小
- 抗UV外壳，防水结构，经久耐用
- 新式硅胶防水头耐受力更强
- Best design of aquatic sterilization and algae removal
- Effectively kill harmful bacteria and prevent diseases
- Purify water quality and inhibit algae growth
- Special grade quartz glass is adopted for more efficient sterilization
- Split design of external controller, small product size
- UV resistant shell, waterproof structure, durable
- The new silicone waterproof head has stronger UV resistance



2. 第二次按下开关按键，绿色指示灯亮UV杀菌灯定时2小时 (Working hours:2hr)
3. 第三次按下开关按键，绿色指示灯亮UV杀菌灯定时4小时 (Working hours:4hr)
4. 第四次按下开关按键，绿色指示灯亮UV杀菌灯定时6小时 (Working hours:6hr)

| MODEL                          | POWER | UV INTENSITY<br>(DISTANCE =1M) | FOR TANK<br>(REFERENCE ONLY) | LIFE<br>LENGTH | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|--------------------------------|-------|--------------------------------|------------------------------|----------------|-----------------|----------------------------|
| KYU1S-5W                       | 5W    | 14μW/cm2                       | 100L                         | 8000-8000h     | ø50*205mm       | 00*00*00mm (0Pcs)          |
| KYU1S-7W                       | 7W    | 16μW/cm2                       | 150L                         | 8000-8000h     | ø50*205mm       |                            |
| KYU1S-9W                       | 9W    | 23μW/cm2                       | 200L                         | 8000-8000h     | ø50*265mm       |                            |
| KYU1S-11W                      | 11W   | 38μW/cm2                       | 250L                         | 8000-8000h     | ø50*265mm       |                            |
| 额定电源 Voltage: AC 220-240V 50Hz |       |                                |                              |                |                 |                            |



## LED KY系列数码显示控温器 DISPLAY EXTERNAL CONTROL HEATER

- 优质防弹石英玻璃
- 完全潜水式
- 精准温度控制
- 可调节温度范围从17~34°C
- 可视温度设置
- 防撞击可拆卸保护罩
- 淡水和海水通用
- High Quality Explosion-proof Quartz Glass
- Fully Submersible
- Precision Temperature Setting
- Adjustable Temperatures Ranges from 17 ~ 34°C
- Visible Temperature Setting
- High Impact Removable Protective Cover
- For Use in Fresh and Saltwater Aquariums



DIGITAL DISPLAY TEMP



Adjustable Temperatures Ranges from 17 ~ 34°C  
THERMOREGULATION: +/-1°C



KY-50W  
KY-100W  
KY-200W

300W

500W

スーパー魚 好品质 源于专业专注  
Professional focus

超鱼智能

## MINI 25°C定点恒温加热棒 FIXED TEMPERATURE HEATER

- 使用耐高温碳纤维全塑胶外壳。
- 25°C定点恒温控制。
- 内置热敏传感器及过热保护开关。
- 潜水式使用,操作简便。
- 适合小型淡水和海水鱼缸中使用。
- Entire high temperature resistant carbon fiber plastic housing.
- 25°C fixed temperature control.
- Internally thermal sensors and over-heat protection switch.
- Submersible using, easy to operate.
- Suitable small freshwater and saltwater aquarium.



Light: Red Heating



Light: Blue Insulation



KY-0681

KY-0682

スーパー魚 好品质 源于专业专注  
Professional focus

超鱼智能

| MODEL                             | POWER | FOR TANK<br>(FOR REFERENCE ONLY) | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|-----------------------------------|-------|----------------------------------|-----------------|----------------------------|
| KY-50W                            | 50W   | <50L                             | ø35x280mm       | 00'00'00mm (0Pcs)          |
| KY-100W                           | 100W  | 50-100L                          | ø35x280mm       |                            |
| KY-200W                           | 200W  | 100-200L                         | ø35x280mm       |                            |
| KY-300W                           | 300W  | 200-300L                         | ø35x310mm       |                            |
| KY-500W                           | 500W  | 300-500L                         | ø35x360mm       |                            |
| 额定电压 Voltage: AC 110-240V 50/60Hz |       |                                  |                 |                            |



| MODEL                             | POWER | FOR TANK<br>(FOR REFERENCE ONLY) | PRODUCT<br>SIZE | OUTER BOX<br>SIZE(PCS/CTN) |
|-----------------------------------|-------|----------------------------------|-----------------|----------------------------|
| KY-0681                           | 10W   | <10L                             | 26x18x134mm     | 00'00'00mm (0Pcs)          |
| KY-0682                           | 20W   | <20L                             | 26x18x134mm     |                            |
|                                   |       |                                  |                 |                            |
|                                   |       |                                  |                 |                            |
|                                   |       |                                  |                 |                            |
| 额定电压 Voltage: AC 110-240V 50/60Hz |       |                                  |                 |                            |





# QUARTS GLASS HEATING ROD

## 石英玻璃加热棒

Advanced design,  
Totally submersible,  
Double seal material,  
Ensuring safe operation,  
Mains power indicator for peace of mine.

スーパー魚 好品质 源于专业专注  
Professional focus



Adjustable Temperatures  
Ranges from 20 - 34°C

THERMOREGULATION:  $\pm 1^{\circ}\text{C}$

| MODEL                             | POWER | FOR TANK<br>(FOR REFERENCE ONLY) | PRODUCT<br>SIZE               | OUTER BOX<br>SIZE(PCS/CTN) |
|-----------------------------------|-------|----------------------------------|-------------------------------|----------------------------|
| KY-G50W                           | 50W   | <50L                             | $\phi 35 \times 250\text{mm}$ | 00'00'00mm (0Pcs)          |
| KY-G100W                          | 100W  | 50-100L                          | $\phi 35 \times 280\text{mm}$ |                            |
| KY-G200W                          | 200W  | 100-200L                         | $\phi 35 \times 280\text{mm}$ |                            |
| KY-G300W                          | 300W  | 200-300L                         | $\phi 35 \times 310\text{mm}$ |                            |
| KY-G500W                          | 500W  | 300-500L                         | $\phi 35 \times 360\text{mm}$ |                            |
| 额定电压 Voltage: AC 110-240V 50/60Hz |       |                                  |                               |                            |



# brine shrimp egg INCUBATOR

The brine shrimp egg to feed the ornamental fish larvae

## 丰年虾卵孵化器

The brine shrimp egg to feed the ornamental fish larvae

Feature:  
easy, functional, convenient to hatch the brine shrimp egg to feed the ornamental fish larvae.  
简单、实用、方便孵化丰年虾卵, 喂养观赏鱼。




Falinenkrebschen




Fresh Water



Marine

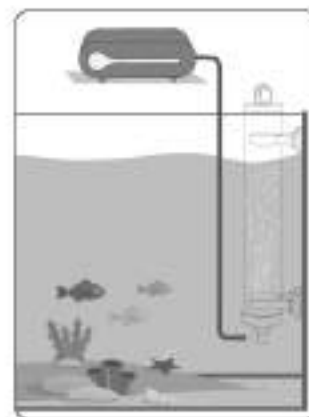

缸内使用  
Used in fish tank

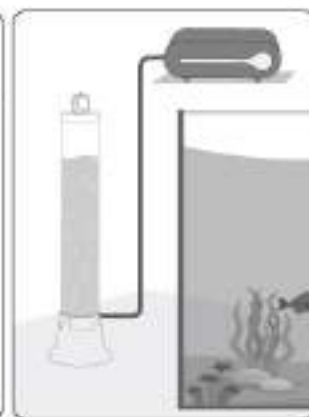

缸外使用  
Used outside the fish tank

| MODEL  | CAPACITY | PRODUCT<br>SIZE               | OUTER BOX<br>SIZE(PCS/CTN) |
|--------|----------|-------------------------------|----------------------------|
| KY-50W | 380ml    | $\phi 35 \times 280\text{mm}$ | 00'00'00mm (0Pcs)          |

スーパー魚 好品质 源于专业专注  
Professional focus






# FISH FEEDER

Acrylic feeding tube or fish feeder  
亚克力投食管

- 该产品由高渗透性丙烯酸材料制成。
- 用于在鱼缸中的固定位置喂食，以防止鱼粮四处飘散污染水质。
- This product is made of high-permeability acrylic material the square fee
- It is used to feed fish at fixed points in the fish tank to prevent the fish material from scattering and polluting the water quality.

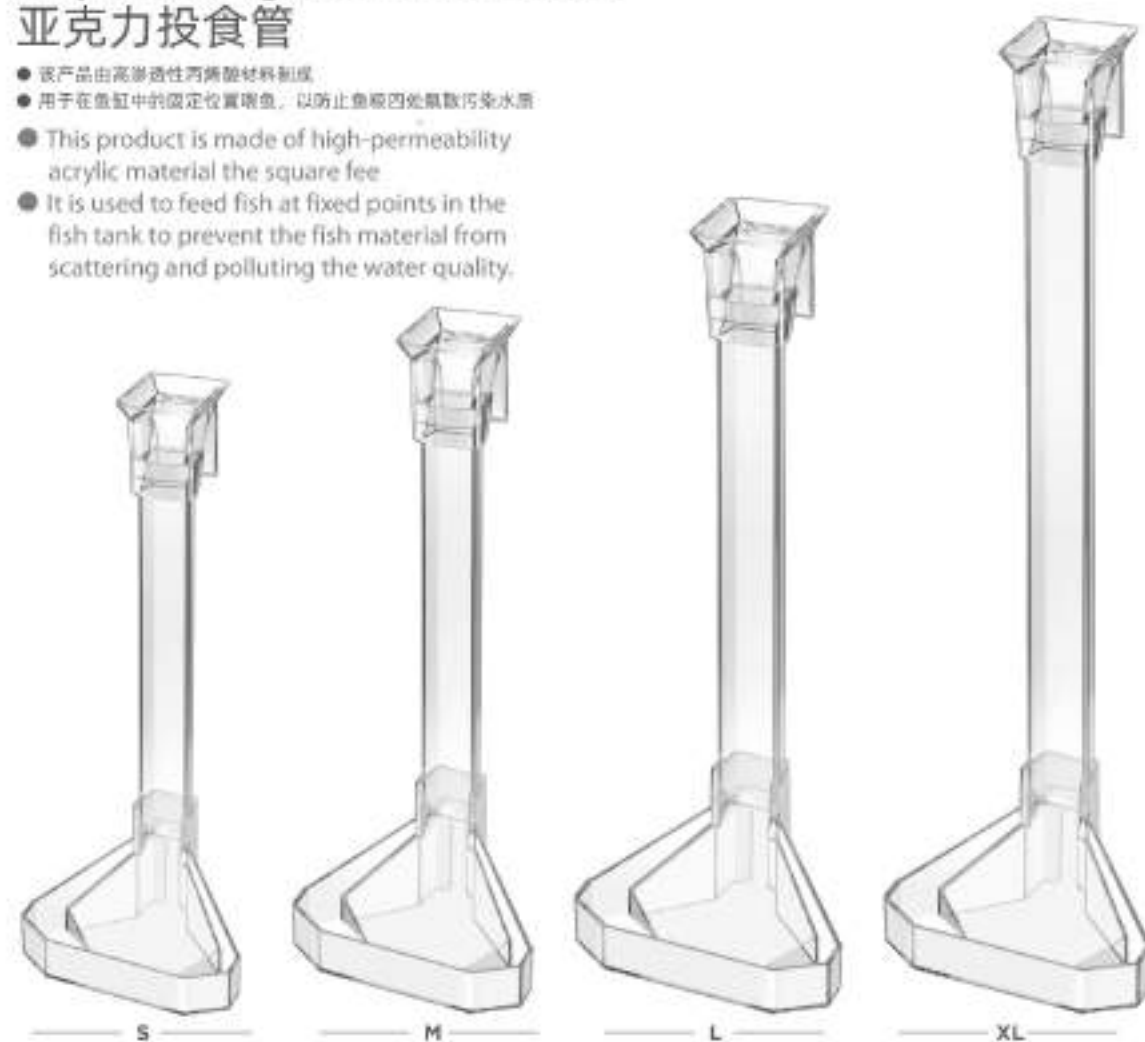

喇叭形投料扣  
Wide window



无吸盘挂扣式  
Hanging type

| MODEL | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|-------|--------------|-------------------------|
| S     | 67x57x210mm  | 00*00*00mm (0Pcs)       |
| M     | 86x65x280mm  |                         |
| L     | 105x70x350mm |                         |
| XL    | 105x70x380mm |                         |


スーパー魚 好品质——源于专业专注  
Professional focus

新品首发

# 12/16/20mm CONNECTOR

水管快速连接头

Designed for connect and convert the different 12/16/20 mm caliber of products.

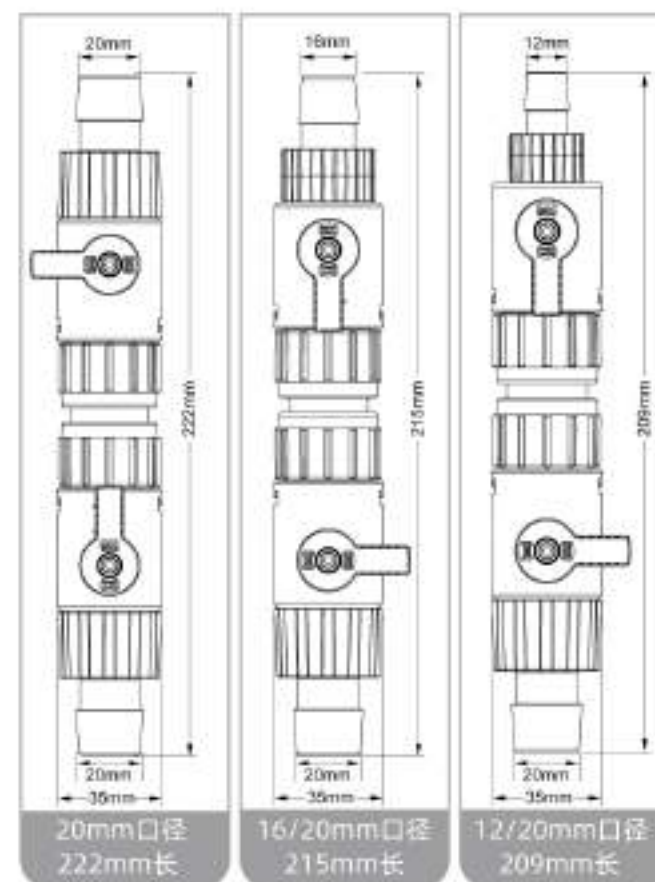

20mm口径 222mm长  
16/20mm口径 215mm长  
12/20mm口径 209mm长

| MODEL    | PRODUCT SIZE | OUTER BOX SIZE(PCS/CTN) |
|----------|--------------|-------------------------|
| KY-12/20 | ø35x209mm    | 00*00*00mm (0Pcs)       |
| KY-16/20 | ø35x215mm    |                         |
| KY-20    | ø35x222mm    |                         |

スーパー魚 好品质——源于专业专注  
Professional focus

新品首发





# THREE WAY WATER CHANGER

## 多用途换水器

Switch included 带水流开关

- 可快速拆卸, 断水不回流。
- 双密封圈设计更安全。
- 工程塑胶材质使用寿命长。
- 淡水/海水通用。

1. Quick disassembly, no backflow
2. Double sealing ring design is more secure
3. Engineering plastic material with long service life
4. River and sea water both can use



スーパー魚 好品质 源于专业专注  
Professional focus



KY-T12

KY-T16

KY-T20

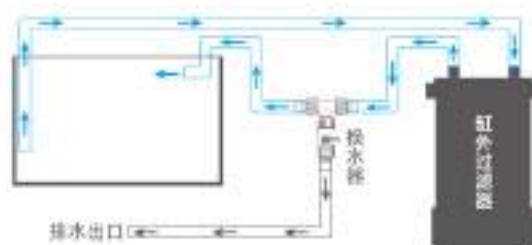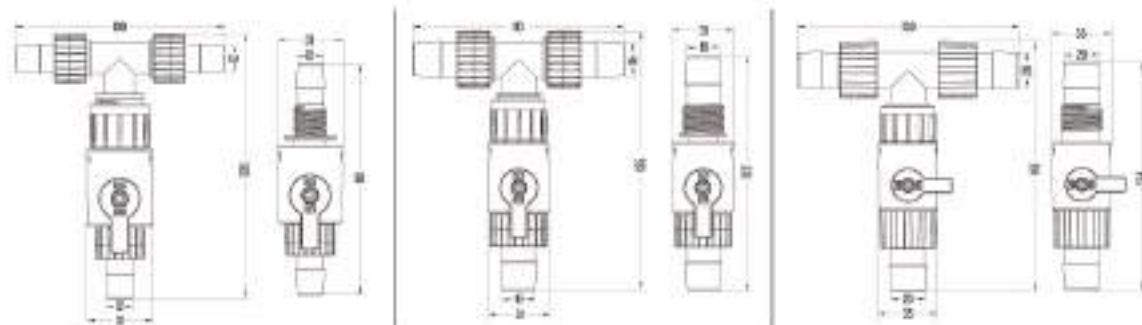

| MODEL  | PRODUCT SIZE | DIMENSION OUTLET | OUTER BOX SIZE(PCS/CTN) |
|--------|--------------|------------------|-------------------------|
| KY-T12 | 100x126mm    | ø12mm            | 00*00*00mm (0Pcs)       |
| KY-T16 | 110x135mm    | ø16mm            |                         |
| KY-T20 | 130x147mm    | ø20mm            |                         |

# 12/16/20mm CONNECTOR

## 水管快速连接头

Designed for connect and convert the different 12/16/20 mm caliber of products.

スーパー魚 好品质 源于专业专注  
Professional focus



KY-12B

KY-16B

KY-20B



| MODEL  | PRODUCT SIZE | DIMENSION OUTLET | OUTER BOX SIZE(PCS/CTN) |
|--------|--------------|------------------|-------------------------|
| KY-12B | ø31x105mm    | ø12mm            | 00*00*00mm (0Pcs)       |
| KY-16B | ø31x117mm    | ø16mm            |                         |
| KY-20B | ø31x134mm    | ø20mm            |                         |



# LCD AQUARIUM THERMOMETER 水族电子温度计

スーパー魚 好品质——源于专业专注  
Professional focus  
新鱼智能

小巧 / 精准 / 自贴

COMPACT / ACCURATE / SELF ADHESIVE

**ADVANTAGE:**  
Easy to read: LCD Display both indoor temperature and fish tank temperature.  
Accurate measurement: Temperature sensor was advanced measurement technique.  
Simple and convenient to install.  
优点易于阅读: 液晶显示屏同时显示室内温度和鱼缸温度。  
精确测量: 温度传感器采用先进的测量技术。  
安装简单方便。

测温精度  $\pm 1^{\circ}\text{C}$   
Displaying Tolerance

测量范围  $0^{\circ}\text{C}\sim 40^{\circ}\text{C}$   
Thermometer Measuring Range  $(32^{\circ}\text{F}\sim 104^{\circ}\text{F})$



Black 黑 — Small (S) — White 白



Black 黑 — large (L) — White 白



# FISH FEEDER

Acrylic feeding tube or fish feeder

悬浮式喂食器

スーパー魚 好品质——源于专业专注  
Professional focus  
新鱼智能

固定喂食区，减少饲料浪费，浮力海绵，加厚加厚。  
Fixed feeding area to reduce feed waste, buoyancy sponge, heightened and thickened.

