

Pipe couplings

for fast and easy installation

Our pipe couplings have an ideal price-performance ratio and are particularly easy to install.

- No welding necessary – thus reliable and safe installation
- With stainless steel earthing strap to ensure electrical conductivity
- Metal casing made of aluminium AlMgSi 0.5 F18
- Massive aluminium clamping jaws with double-locking system
- Circular version, thus very easy to install



**see the video
on our website**

The right pipe coupling for all purposes:

Nitrile* (white)**

-20 °C +80 °C

Natural rubber – black**

-20 °C +60 °C

EPDM* (white)**

-30 °C +120 °C

Neoprene – resistant to weather conditions

-30 °C +100 °C

Silikone* – heat-resistant

-60 °C +200 °C

Viton – resistant to chemical influences

-20 °C +250 °C

*Safe for use with food | **In stock



**You can find Individual gaskets as spare parts
in the accessories section on page 108**

DVK-HD® High pressure

for pipe diameters from 60.3 to 206.0 mm



Pressure conveying

- pressure-resistant up to max. 12 bar / vacuum-resistant up to 0.8 bar
- from -20 °C to +80 °C
- safe for use with food
- all standard diameters immediately available from stock

fast & safe connections

● **Immediately available** from stock

DVK 6

for pipe diameters from 33.7 to 110.0 mm



Suction conveying

- pressure-resistant up to max. 6 bar / vacuum-resistant up to 0.6 bar
- from -20 °C to +60 °C
- safe for use with food
- all standard diameters immediately available from stock

Pipe couplings DVK-HD® high pressure for heavy-duty pressure conveying (heavy version)



Our pipe couplings have an ideal
price-performance ratio
and are particularly easy to install.

Patented at the
German Patent Office, Munich
Patent No. 10 2008 031 485

DVK-HD® High pressure

- For outer pipe diameters from 60.3 to 206.0 mm
- Length 100, 150 and 200 mm or longer
- Pressure surge-resistant up to max. 12 bar, vacuum-resistant up to 0.8 bar
- Standard: with white nitrile gasket from -20 °C to + 80 °C
- Safe for use with food
- M12 screws with massive threaded bars
- No welding necessary - thus reliable and safe installation
- With stainless steel grounding stripe for electrical conductivity
- Metal casing made of aluminium AlMgSi 0,5 F18
- Massive aluminium clamping jaws with double-locking system
- Circular version, thus very easy to install
- All standard diameters immediately available from stock

**special gaskets at request: EPDM, silicone,
viton and other gasket-materials**



Pipe couplings DVK-HD® high pressure

Pipe couplings DVK-HD® length 150 mm – 3 screws						
Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
60.3 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	1.1 kg	406036H66
70.0 mm	150 mm	Nitrile white	0.6 bar	18.0 bar	1.1 kg	407036H66
76.1 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	1.2 kg	407636H66
80.0 mm	150 mm	Nitrile white	0.8 bar	16.0 bar	1.2 kg	408036H66
84.0 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	1.2 kg	408436H66
85.0 mm	150 mm	EPDM white	0.8 bar	12.0 bar	1.2 kg	408536H06
88.9 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	1.3 kg	408836H66
90.0 mm	150 mm	EPDM white	0.8 bar	10.0 bar	1.2 kg	409036H06
100.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	410036H66
101.6 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	410136H66
104.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	410436H66
106.0 mm	150 mm	EPDM white	0.8 bar	8.0 bar	1.3 kg	410636H06
108.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.5 kg	410836H66
110.0 mm	150 mm	EPDM white	0.8 bar	8.0 bar	1.4 kg	411036H06
114.3 mm	150 mm	Nitrile white	0.8 bar	6.0 bar	1.5 kg	411436H66
125.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	1.6 kg	412536H66
127.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	1.8 kg	412736H66
128.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	1.7 kg	412836H66
129.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	1.7 kg	412936H66
133.0 mm	150 mm	Nitrile white	0.8 bar	3.0 bar	1.8 kg	413336H66
139.7 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	1.8 kg	413936H66
154.0 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	1.9 kg	415436H66
156.0 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	1.9 kg	415636H66
159.0 mm	150 mm	Natural black rubber	0.6 bar	1.0 bar	2.1 kg	415936H02
159.0 mm	150 mm	Nitrile white	0.8 bar	1.0 bar	2.1 kg	415936H66
168.3 mm	150 mm	Nitrile white	0.4 bar	1.0 bar	2.1 kg	416836H66
204.0 mm	150 mm	Nitrile white	0.3 bar	0.8 bar	2.7 kg	420436H66
206.0 mm	150 mm	Nitrile white	0.3 bar	0.5 bar	2.7 kg	420636H66



Pipe couplings DVK-HD® length 100 mm – 2 screws						
Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
○ 60.3 mm	100 mm	Nitrile white	0.6 bar	8 bar	0.8 kg	406036H65
70.0 mm	100 mm	Nitrile white	0.6 bar	8 bar	0.8 kg	407036H65
76.1 mm	100 mm	Nitrile white	0.6 bar	7 bar	0.8 kg	407636H65
80.0 mm	100 mm	Nitrile white	0.6 bar	6 bar	0.8 kg	408036H65
○ 84.0 mm	100 mm	Nitrile white	0.6 bar	6 bar	0.8 kg	408436H65
88.9 mm	100 mm	Nitrile white	0.6 bar	6 bar	0.9 kg	408836H65
100.0 mm	100 mm	Nitrile white	0.6 bar	5 bar	0.9 kg	410036H65
101.6 mm	100 mm	Nitrile white	0.6 bar	5 bar	0.9 kg	410136H65
104.0 mm	100 mm	Nitrile white	0.6 bar	5 bar	0.9 kg	410436H65
○ 108.0 mm	100 mm	Nitrile white	0.6 bar	4 bar	1.0 kg	410836H65
114.3 mm	100 mm	Nitrile white	0.6 bar	1 bar	1.0 kg	411436H65

○ = no stock article | available at short notice

Pipe couplings DVK-HD® high pressure



Pipe couplings DVK-HD® length 200 mm – 4 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
60.3 mm	200 mm	Nitrile white	0.8 bar	20 bar	1.5 kg	406036H67 ○
70.0 mm	200 mm	Nitrile white	0.8 bar	20 bar	1.5 kg	407036H67
76.1 mm	200 mm	Nitrile white	0.8 bar	20 bar	1.6 kg	407636H67
80.0 mm	200 mm	Nitrile white	0.8 bar	18 bar	1.6 kg	408036H67
84.0 mm	200 mm	Nitrile white	0.8 bar	14 bar	1.7 kg	408436H67
85.0 mm	200 mm	EPDM white	0.8 bar	14 bar	1.7 kg	408536H07
88.9 mm	200 mm	Nitrile white	0.8 bar	14 bar	1.7 kg	408836H67
90.0 mm	200 mm	EPDM white	0.8 bar	10 bar	1.7 kg	409036H07 ○
100.0 mm	200 mm	Nitrile white	0.8 bar	11 bar	1.9 kg	410036H67
101.6 mm	200 mm	Nitrile white	0.8 bar	11 bar	1.9 kg	410136H67
104.0 mm	200 mm	Nitrile white	0.8 bar	11 bar	1.9 kg	410436H67
106.0 mm	200 mm	EPDM white	0.8 bar	9 bar	1.8 kg	410636H07
108.0 mm	200 mm	Nitrile white	0.8 bar	11 bar	2.0 kg	410836H67
110.0 mm	200 mm	EPDM white	0.8 bar	9 bar	2.0 kg	411036H07
114.3 mm	200 mm	Nitrile white	0.8 bar	10 bar	2.0 kg	411436H67
125.0 mm	200 mm	Nitrile white	0.6 bar	5 bar	2.3 kg	412536H67
127.0 mm	200 mm	Nitrile white	0.6 bar	5 bar	2.3 kg	412736H67
129.0 mm	200 mm	Nitrile white	0.6 bar	5 bar	2.2 kg	412936H67
133.0 mm	200 mm	Nitrile white	0.6 bar	4.5 bar	2.5 kg	413336H67
139.7 mm	200 mm	Nitrile white	0.6 bar	4 bar	2.5 kg	413936H67
154.0 mm	200 mm	Nitrile white	0.6 bar	2.5 bar	2.7 kg	415436H67
159.0 mm	200 mm	Nitrile white	0.6 bar	1.5 bar	2.8 kg	415936H67
168.3 mm	200 mm	Nitrile white	0.5 bar	1.5 bar	2.8 kg	416836H67
168.3 mm	300 mm	Nitrile white	0.8 bar	1.5 bar	4.2 kg	416836H69 ○
204.0 mm	200 mm	Nitrile white	0.3 bar	1 bar	3.6 kg	420436H67
204.0 mm	250 mm	Nitrile white	0.4 bar	1 bar	4.5 kg	420436H68
206.0 mm	200 mm	Nitrile white	0.3 bar	0.8 bar	3.6 kg	420636H67 ○

no stock article | available at short notice = ○

Pipe couplings DVK-HD® high pressure in anodized version



Anodized version of pipe couplings have been developed especially for use in outside area.

Furthermore these couplings are equipped with: stainless steel screws, nuts and threaded bars to be resistant to weathering.

Further DVK-HD and DVK-6 couplings in anodized version - available at request

Pipe couplings DVK HD® Nitrile – Silver anodized, length 150 mm – 3 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
60.3 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	1.1 kg	4060S6H66-E
76.1 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	1.2 kg	4076S6H66-E
84.0 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	1.2 kg	4084S6H66-E
88.9 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	1.3 kg	4088S6H66-E
100.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	4100S6H66-E
101.6 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	4101S6H66-E
104.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	1.4 kg	4104S6H66-E
114.3 mm	150 mm	Nitrile white	0.8 bar	9.0 bar	1.5 kg	4114S6H66-E
129.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	1.7 kg	4129S6H66-E
139.7 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	1.8 kg	4139S6H66-E
154.0 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	1.9 kg	4154S6H66-E
168.3 mm	150 mm	Nitrile white	0.4 bar	1.0 bar	2.1 kg	4168S6H66-E

Stainless steel pipe couplings



available
at request


Stainless steel pipe couplings
Material no. AISI 304 are available from
diameters 70.0 mm to 206.0 mm

also available in material
AISI 316 L / AISI 316 Ti

Plug for DVK-HD

to seal the coupling head

For food industry and clean room applications

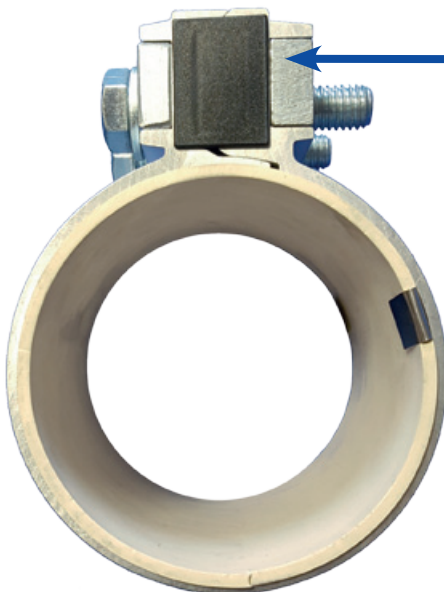

available
at request



Pipe coupling DVK-HD®

Quick closure



available
at request

DVK-HD® **quick closure** pipe couplings are ideal for a quick and safe mounting in pressure conveyors.

The coupling is closed with two clamping levers, therefore a quick opening and closing of pipe connections is possible.

The clamping lever can be locked in any desired position by a simple upward pull.

Pipe couplings type DVK-HD® **quick closure** have the following characteristics:

DVK-HD® **Quick closure**

- for outer pipe diameter 60.3 mm to 168.3 mm
- Casing made of aluminium AlMgSi 0,5 F22
- Vacuum-resistant up to max. 0.2 bar
- With light nitrile gasket or EPDM-gasket
- food-safe
- TÜV tested



Bridge part traction relief for DVK HD® high pressure

bridge part traction relief
also mountable afterwards
available at short notice



Also mountable afterwards:

- Clamps: galvanized steel
- Traction bars: aluminium

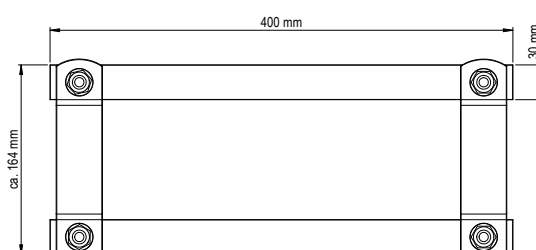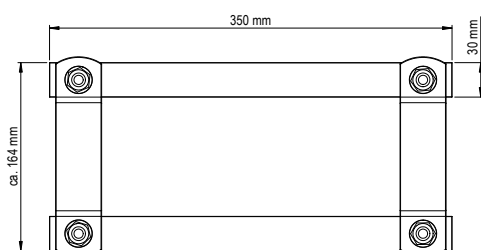

**Bridge part traction relief length
350 mm for DVK HD® length 150 mm**



for outer pipe diameter	Article number
60.3 mm	Z0602N350
70.0 mm	Z0702N350
76.1 mm	Z0762N350
80.0 mm	Z0802N350
84.0 mm	Z0842N350
88.9 mm	Z0882N350
100.0 mm	Z1002N350
101.6 mm	Z1012N350
104.0 mm	Z1042N350
106.0 mm	Z1062N350
108.0 mm	Z1082N350
110.0 mm	Z1102N350
114.3 mm	Z1142N350
125.0 mm	Z1252N350
129.0 mm	Z1292N350
133.0 mm	Z1332N350
139.7 mm	Z1392N350
154.0 mm	Z1542N350

**Bridge part traction relief length
400 mm for DVK HD® length 200 mm**

for outer pipe diameter	Article number
60.3 mm	Z0602N400
70.0 mm	Z0702N400
76.1 mm	Z0762N400
80.0 mm	Z0802N400
84.0 mm	Z0842N400
88.9 mm	Z0882N400
100.0 mm	Z1002N400
101.6 mm	Z1012N400
104.0 mm	Z1042N400
106.0 mm	Z1062N400
108.0 mm	Z1082N400
110.0 mm	Z1102N400
114.3 mm	Z1142N400
125.0 mm	Z1252N400
129.0 mm	Z1292N400
133.0 mm	Z1332N400
139.7 mm	Z1392N400
154.0 mm	Z1542N400

Pipe couplings DVK-HD®


with Traction relief

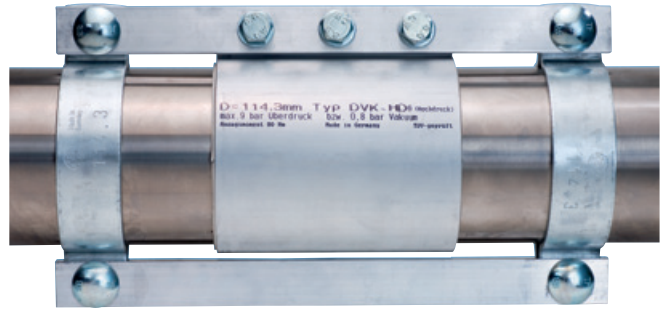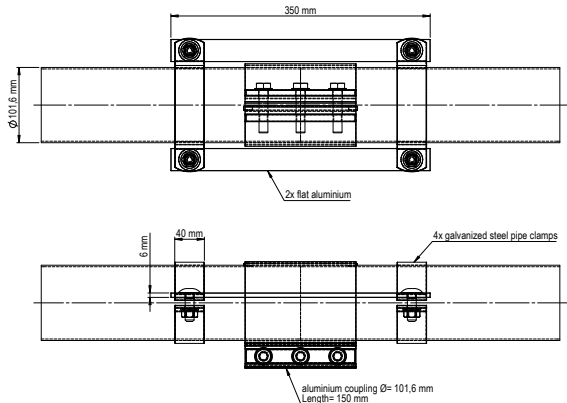

Pipe couplings DVK HD® Nitrile – traction relief, length 150 mm – 3 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Article number
60.3 mm	150 mm	Nitrile white	0.8 bar	16.0 bar	406038H66
70.0 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	407038H66
76.1 mm	150 mm	Nitrile white	0.8 bar	18.0 bar	407638H66
80.0 mm	150 mm	Nitrile white	0.8 bar	16.0 bar	408038H66
84.0 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	408438H66
88.9 mm	150 mm	Nitrile white	0.8 bar	12.0 bar	408838H66
100.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	410038H66
101.6 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	410138H66
104.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	410438H66
108.0 mm	150 mm	Nitrile white	0.8 bar	10.0 bar	410838H66
114.3 mm	150 mm	Nitrile white	0.8 bar	9.0 bar	411438H66
125.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	412538H66
127.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	412738H66
129.0 mm	150 mm	Nitrile white	0.8 bar	4.0 bar	412938H66
133.0 mm	150 mm	Nitrile white	0.8 bar	3.0 bar	413338H66
139.7 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	413938H66
154.0 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	415438H66
168.0 mm	150 mm	Nitrile white	0.8 bar	2.5 bar	416838H66
204.0 mm	150 mm	Nitrile white	0.8 bar	at request	420438H66
206.0 mm	150 mm	Nitrile white	0.8 bar	at request	420638H66

○ = no stock article | available at short notice

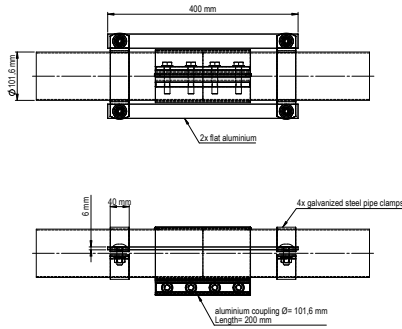

Pipe couplings DVK-HD® with traction-relief

Pipe coupling DVK-HD® Nitrile – traction-relief, length 200 mm – 4 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Article number	
60.3 mm	200 mm	Nitrile white	0.8 bar	20.0 bar	406038H67	○
70.0 mm	200 mm	Nitrile white	0.8 bar	20.0 bar	407038H67	○
76.1 mm	200 mm	Nitrile white	0.8 bar	22.0 bar	407638H67	○
80.0 mm	200 mm	Nitrile white	0.8 bar	18.0 bar	408038H67	○
84.0 mm	200 mm	Nitrile white	0.8 bar	14.0 bar	408438H67	○
88.9 mm	200 mm	Nitrile white	0.8 bar	14.0 bar	408838H67	○
100.0 mm	200 mm	Nitrile white	0.8 bar	11.0 bar	410038H67	○
101.6 mm	200 mm	Nitrile white	0.8 bar	11.0 bar	410138H67	○
104.0 mm	200 mm	Nitrile white	0.8 bar	11.0 bar	410438H67	○
108.0 mm	200 mm	Nitrile white	0.8 bar	11.0 bar	410838H67	○
114.3 mm	200 mm	Nitrile white	0.8 bar	10.0 bar	411438H67	○
125.0 mm	200 mm	Nitrile white	0.8 bar	5.0 bar	412538H67	○
127.0 mm	200 mm	Nitrile white	0.8 bar	5.0 bar	412738H67	○
129.0 mm	200 mm	Nitrile white	0.8 bar	5.0 bar	412938H67	○
133.0 mm	200 mm	Nitrile white	0.8 bar	4.5 bar	413338H67	○
139.7 mm	200 mm	Nitrile white	0.8 bar	4.0 bar	413938H67	○
154.0 mm	200 mm	Nitrile white	0.8 bar	4.0 bar	415438H67	○
168.0 mm	200 mm	Nitrile white	0.8 bar	4.0 bar	416838H67	○
204.0 mm	200 mm	Nitrile white	0.8 bar	at request	420438H67	○
206.0 mm	200 mm	Nitrile white	0.8 bar	at request	420638H67	○

Pipe couplings DVK-HD® EPDM – traction relief

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Article number	
85.0 mm	150 mm	EPDM white	0.8 bar	12.0 bar	408538H06	○
85.0 mm	200 mm	EPDM white	0.8 bar	14.0 bar	408538H07	○
90.0 mm	150 mm	EPDM white	0.8 bar	9.0 bar	409038H06	○
90.0 mm	200 mm	EPDM white	0.8 bar	10.0 bar	409038H07	○
106.0 mm	150 mm	EPDM white	0.8 bar	8.0 bar	410638H06	○
106.0 mm	200 mm	EPDM white	0.8 bar	9.0 bar	410638H07	○
110.0 mm	150 mm	EPDM white	0.8 bar	8.0 bar	411038H06	○
110.0 mm	200 mm	EPDM white	0.8 bar	9.0 bar	411038H07	○

no stock article | available at short notice = ○

Pipe couplings DVK 6 for suction conveying (light version)



Our pipe couplings have an ideal price-performance ratio and are particularly easy to install.

DVK 6

- For outer pipe diameters from 33.7 to 110.0 mm
- Length 100, 150 mm or longer
- Vacuum-resistant to 0.6 bar – pressure-resistant to max. 6 bar
- **Standard: black natural rubber gasket from -20 °C to + 60 °C**
- **Alternatively: white EPDM-gasket from -30 °C to + 120 °C**
- **Special gaskets on request: nitrile gasket / silicone / viton**
- All standard-diameters immediately available from stock
- Anodized version with stainless steel screws also available at request



Pipe couplings DVK 6

Gasket: Natural black rubber

Pipe couplings DVK 6 Natural rubber, length 100 mm – 2 screws						
Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
38.0 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	403835H01
40.0 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	404035H01
45.0 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	404535H01
48.3 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	404835H01
50.0 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	405035H01
50.8 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	405135H01
54.0 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.3 kg	405435H01
60.3 mm	100 mm	Natural black rubber	0.6 bar	6.0 bar	0.4 kg	406035H01
63.5 mm	100 mm	Natural black rubber	0.5 bar	5.0 bar	0.4 kg	406335H01
65.0 mm	100 mm	Natural black rubber	0.5 bar	4.0 bar	0.4 kg	406535H01
70.0 mm	100 mm	Natural black rubber	0.5 bar	3.5 bar	0.4 kg	407035H01
76.1 mm	100 mm	Natural black rubber	0.5 bar	1.5 bar	0.6 kg	407635H01
80.0 mm	100 mm	Natural black rubber	0.5 bar	1.5 bar	0.5 kg	408035H01
84.0 mm	100 mm	Natural black rubber	0.5 bar	1.5 bar	0.5 kg	408435H01
88.9 mm	100 mm	Natural black rubber	0.5 bar	1.0 bar	0.5 kg	408835H01
100.0 mm	100 mm	Natural black rubber	0.5 bar	0.5 bar	0.6 kg	410035H01
101.6 mm	100 mm	Natural black rubber	0.5 bar	0.5 bar	0.5 kg	410135H01
104.0 mm	100 mm	Natural black rubber	0.5 bar	0.5 bar	0.6 kg	410435H01
108.0 mm	100 mm	Natural black rubber	0.5 bar	0.5 bar	0.6 kg	410835H01
110.0 mm	100 mm	Natural black rubber	0.5 bar	0.5 bar	0.6 kg	411035H01

Pipe couplings DVK 6

Gasket: Natural black rubber



Pipe couplings DVK 6 Natural rubber, length 150 mm – 3 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
38.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.4 kg	403835H02
40.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.4 kg	404035H02
45.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	404535H02
48.3 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	404835H02
50.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	405035H02
50.8 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	405135H02
54.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	405435H02
60.3 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.5 kg	406035H02
63.5 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.6 kg	406335H02
65.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.6 kg	406535H02
70.0 mm	150 mm	Natural black rubber	0.6 bar	6.0 bar	0.6 kg	407035H02
76.1 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.7 kg	407635H02
80.0 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.7 kg	408035H02
84.0 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.7 kg	408435H02
88.9 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.8 kg	408835H02
100.0 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.9 kg	410035H02
101.6 mm	150 mm	Natural black rubber	0.5 bar	1.5 bar	0.8 kg	410135H02
104.0 mm	150 mm	Natural black rubber	0.5 bar	1.0 bar	0.9 kg	410435H02
108.0 mm	150 mm	Natural black rubber	0.5 bar	1.0 bar	1.0 kg	410835H02
110.0 mm	150 mm	Natural black rubber	0.5 bar	1.0 bar	0.9 kg	411035H02



Pipe couplings DVK 6

Gasket: EPDM white

Pipe couplings DVK 6 EPDM, length 100 mm – 2 screws						
Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
38.0 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	403835H05
40.0 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	404035H05
45.0 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	404535H05
48.3 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	404835H05
50.0 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	405035H05
50.8 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	405135H05
54.0 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.3 kg	405435H05
60.3 mm	100 mm	EPDM white	0.6 bar	6.0 bar	0.4 kg	406035H05
63.5 mm	100 mm	EPDM white	0.5 bar	5.0 bar	0.5 kg	406335H05
65.0 mm	100 mm	EPDM white	0.5 bar	4.0 bar	0.4 kg	406535H05
70.0 mm	100 mm	EPDM white	0.5 bar	3.5 bar	0.4 kg	407035H05
76.1 mm	100 mm	EPDM white	0.5 bar	1.5 bar	0.5 kg	407635H05
80.0 mm	100 mm	EPDM white	0.5 bar	1.5 bar	0.5 kg	408035H05
84.0 mm	100 mm	EPDM white	0.5 bar	1.5 bar	0.5 kg	408435H05
88.9 mm	100 mm	EPDM white	0.5 bar	1.0 bar	0.5 kg	408835H05
100.0 mm	100 mm	EPDM white	0.5 bar	0.5 bar	0.5 kg	410035H05
101.6 mm	100 mm	EPDM white	0.5 bar	0.5 bar	0.5 kg	410135H05
104.0 mm	100 mm	EPDM white	0.5 bar	0.5 bar	0.6 kg	410435H05
108.0 mm	100 mm	EPDM white	0.5 bar	0.5 bar	0.6 kg	410835H05
110.0 mm	100 mm	EPDM white	0.5 bar	0.5 bar	0.6 kg	411035H05

Pipe couplings DVK 6 EPDM, length 150 mm – 3 screws

Diameter	Length	Gasket	Vacuum-resistant	Pressure-resistant	Weight	Article number
38.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.4 kg	403835H06
40.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	404035H06
45.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	404535H06
48.3 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	404835H06
50.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	405035H06
50.8 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	405135H06
54.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	405435H06
60.3 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	406035H06
63.5 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.5 kg	406335H06
65.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.6 kg	406535H06
70.0 mm	150 mm	EPDM white	0.6 bar	6.0 bar	0.6 kg	407035H06
76.1 mm	150 mm	EPDM white	0.5 bar	1.5 bar	0.7 kg	407635H06
80.0 mm	150 mm	EPDM white	0.7 bar	1.5 bar	0.7 kg	408035H06
84.0 mm	150 mm	EPDM white	0.5 bar	1.5 bar	0.7 kg	408435H06
88.9 mm	150 mm	EPDM white	0.5 bar	1.5 bar	0.8 kg	408835H06
100.0 mm	150 mm	EPDM white	0.5 bar	1.5 bar	0.9 kg	410035H06
101.6 mm	150 mm	EPDM white	0.5 bar	1.5 bar	0.8 kg	410135H06
104.0 mm	150 mm	EPDM white	0.5 bar	1.0 bar	0.9 kg	410435H06
108.0 mm	150 mm	EPDM white	0.5 bar	1.0 bar	1.0 kg	410835H06
110.0 mm	150 mm	EPDM white	0.5 bar	1.0 bar	1.0 kg	411035H06

Pipe couplings DVK 6 - Quick closure

DVK-6 pipe couplings with quick closure accelerate mounting in suction conveying with constant safety. The clamping lever can be locked in any position desired by a simple upward pull.

A high clamping force develops due to optimal length of lever.



available at request

- For outer pipe diameter from 33.7 to 110.0 mm
- Length: 150 mm or longer
- Easy to use and timesaving quick closure
- Vacuum-resistant up to max. 0.4 bar
- Pressure-resistant up to max. 2 bar
- Double secured massive aluminium clamps
- Black natural gasket (- 20°C to + 60°C)
- White EPDM gasket (food safe and temperature-resistant from - 30°C to + 120°C)
- Optionally with silicone gasket (- 60°C to + 200°C)