


FRAME FOOT™ MINI


FRAME FOOT MINI

Anti-vibration frames designed for non-invasive installation of outdoor units on the ground or flat roofs with a maximum slope of up to 5%.




FF-COMPACT

Dimensions:
Length: 450–755 mm
Width: 115–375 mm
Height: 300–323 mm
Load capacity: 300 kg/unit

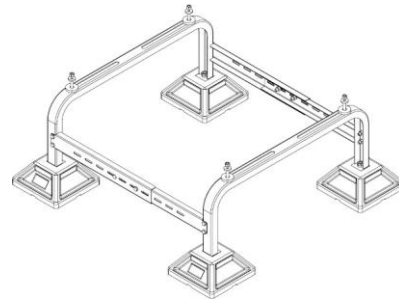


FF-755

Dimensions:
Length: 450–755 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 360 kg/unit

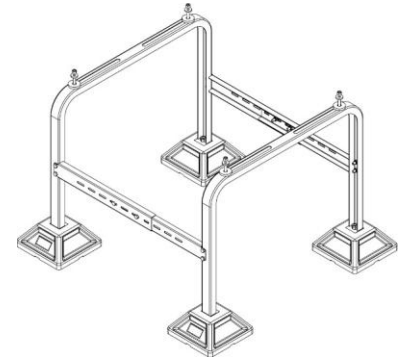


FF-755 DTU

Dimensions:
Length: 450–755 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 360 kg/unit

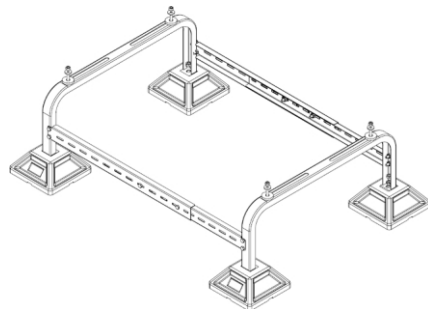


FF-1250-MONO

Dimensions:
Length: 690–1250 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 450 kg/unit

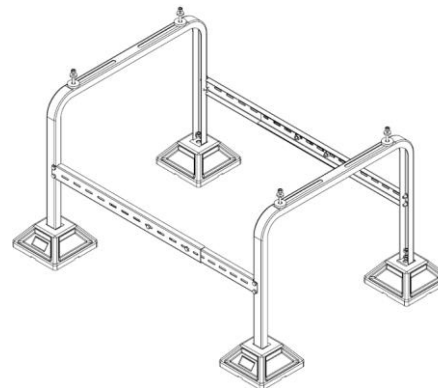


FF-1250-MONO DTU

Dimensions:
Length: 690–1250 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 450 kg/unit

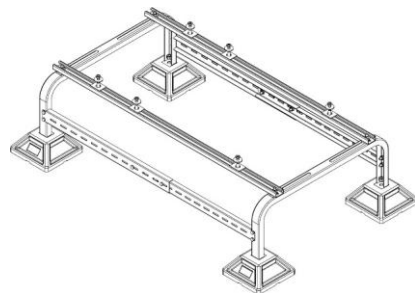


FF-1200-MONO-3D

Dimensions:
Length: 690–1130 mm
Width: 120–520 mm
Height: 330–370 mm
Load capacity: 360 kg/unit

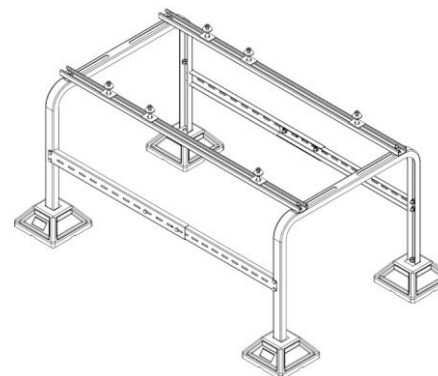

FF-1200-MONO-3D DTU

Dimensions:
Length: 690–1130 mm
Width: 120–520 mm
Height: 600–640 mm
Load capacity: 360 kg/unit

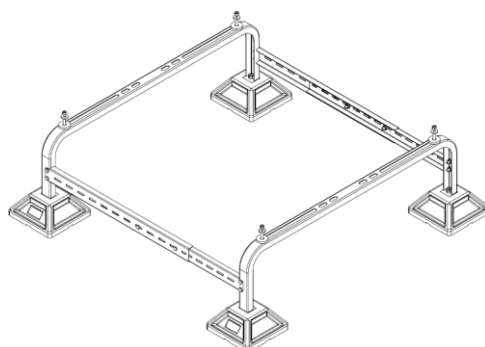


FF-1250-VR

Dimensions:
Length: 690–1250 mm
Width: 120–820 mm
Height: 330–370 mm
Load capacity: 450 kg/unit

FRAME FOOT™


FRAME FOOT

Modular frame kits for large units. Designed for non-invasive installation on flat roofs and on the ground. Individually configured for any unit dimensions.

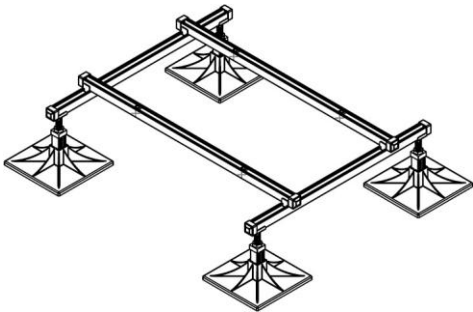


FF4

Dimensions*:
Length: max. 1121/912** mm
Width: max. 912/1121** mm
Height: 295-415 mm
Load capacity: 500 (500 kg/m²)

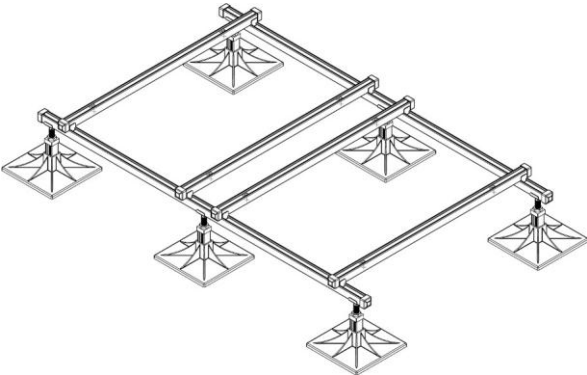


FF6

Dimensions*:
Length: max. 1808 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 1040 (520 kg/m²)

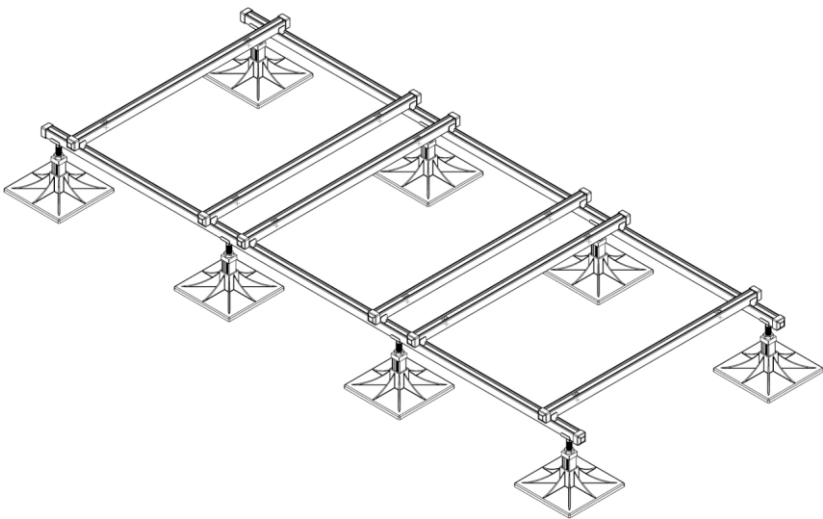


FF8

Dimensions*:
Length: max. 2757 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 1620 (540 kg/m²)

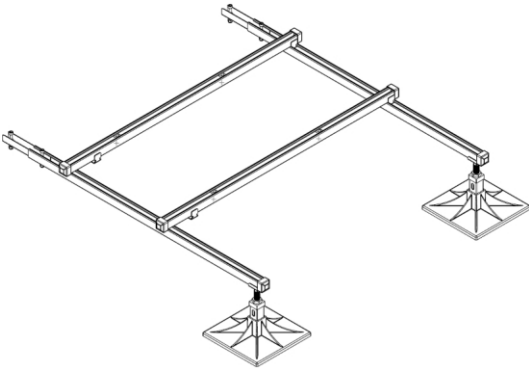

FF2-EXT


Dimensions*:
Length: max. 912 mm
Width: max. 1121 mm
Height: 295-415 mm
Load capacity: 500 (500 kg/m²)

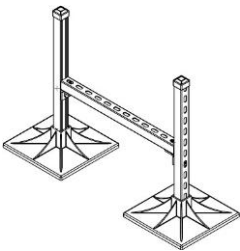

HF-600


Dimensions*:
Width: max 600 mm
Height: 240-415 mm
Load capacity: 500 (500 kg/m²)

* Dimensions of device mounting points
** Inverted layout

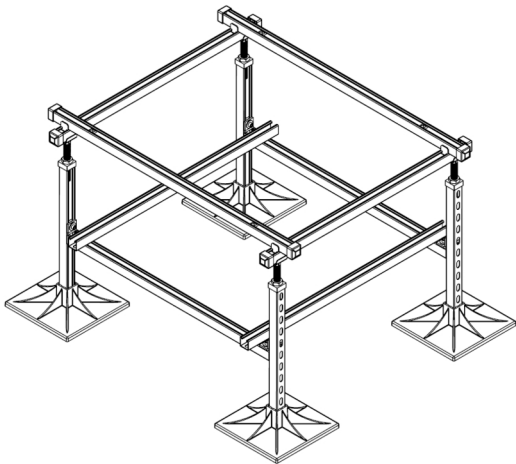


FF4-DTU-R

Dimensions*:
Length: max. 1121/912** mm
Width: max. 912/1121** mm
Height: 745-865 mm
Load capacity: 500 (500 kg/m²)

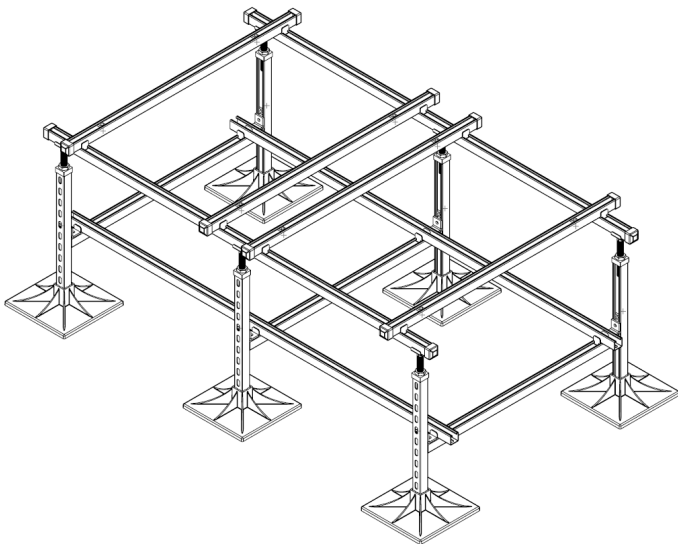


FF6-DTU-R

Dimensions*:
Length: max. 1808 mm
Width: max. 1121 mm
Height: 745-865 mm
Load capacity: 1040 (520 kg/m²)

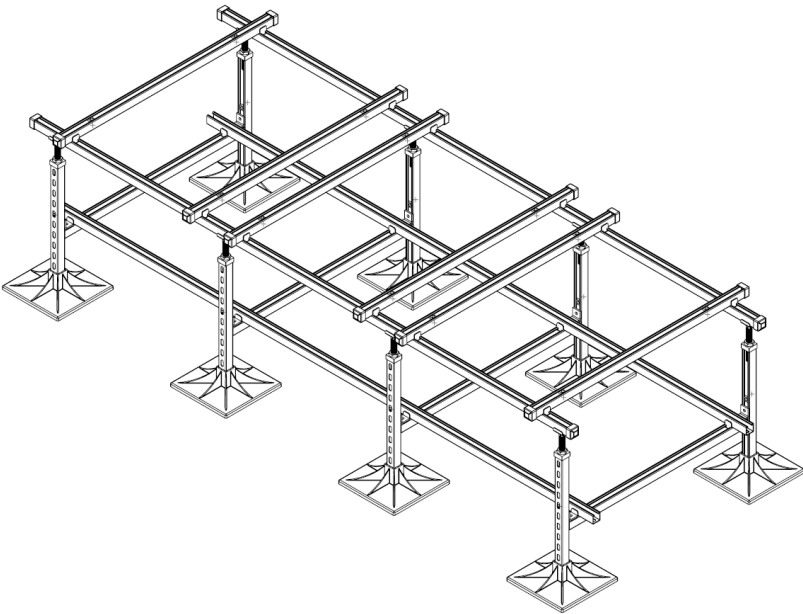

FF8-DTU-R

Dimensions*:
Length: max. 2757 mm
Width: max. 1121 mm
Height: 745-865 mm
Load capacity: 1620 (540 kg/m²)

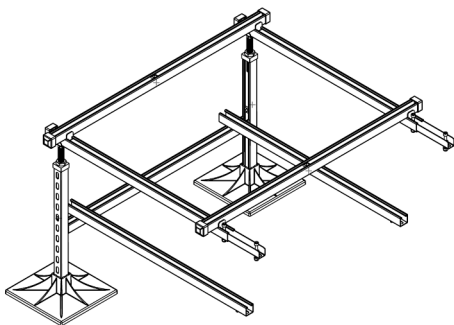


FF2-EXT-DTU-R

Dimensions*:
Length: max. 912 mm
Width: max. 1121 mm
Height: 745-865 mm
Load capacity: 500 (500 kg/m²)

* Dimensions of device mounting points
** Inverted layout


RUBBER BLOCK

RUBBER BLOCK
Effectively dampen vibrations emitted by equipment.
Resistant to weather conditions and chemicals.
Ensure stability of equipment and safety of its use.
Designed for installation of: refrigeration equipment, ventilation equipment, heat pumps and installation lines.




RB250/130

Length: 250 mm
Width: 130 mm
Height: 95 mm
Load capacity: 120 kg/unit




RB400/130

Length: 400 mm
Width: 130 mm
Height: 95 mm
Load capacity: 180 kg/unit

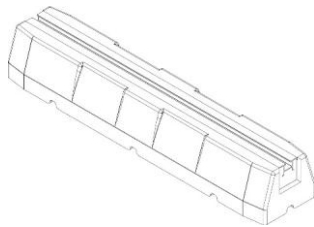


RB600/130

Length: 600 mm
Width: 130 mm
Height: 95 mm
Load capacity: 300 kg/unit

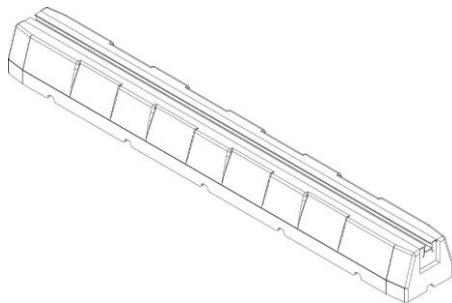


RB1000/130

Length: 1000 mm
Width: 130 mm
Height: 95 mm
Load capacity: 350 kg/unit




RB250/180

Length: 250 mm
Width: 180 mm
Height: 95 mm
Load capacity: 120 kg/unit

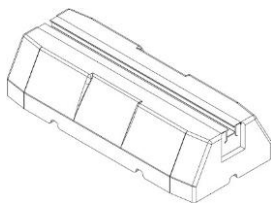


RB400/180

Length: 400 mm
Width: 180 mm
Height: 95 mm
Load capacity: 180 kg/unit

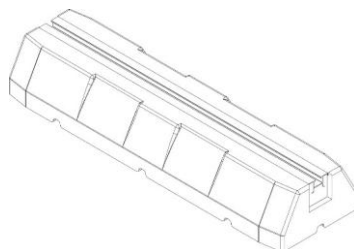


RB600/180

Length: 600 mm
Width: 180 mm
Height: 95 mm
Load capacity: 300 kg/unit

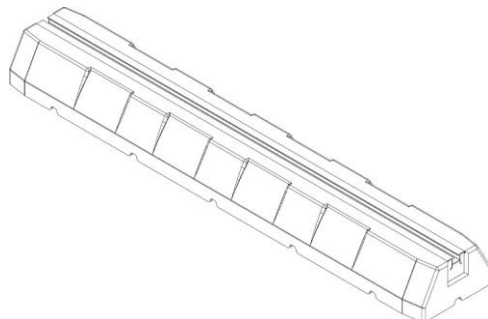


RB1000/180

Length: 1000 mm
Width: 180 mm
Height: 95 mm
Load capacity: 350 kg/unit

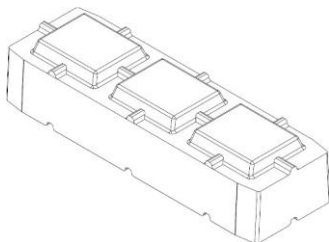


RISER600/180

Length: 600 mm
Width: 190 mm
Height: 130 mm
Load capacity: 300 kg/unit

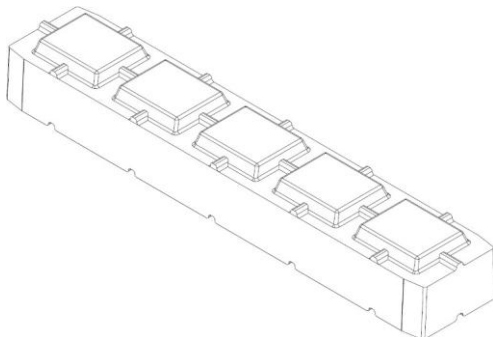


RISER1000/180

Length: 1000 mm
Width: 190 mm
Height: 130 mm
Load capacity: 350 kg/unit

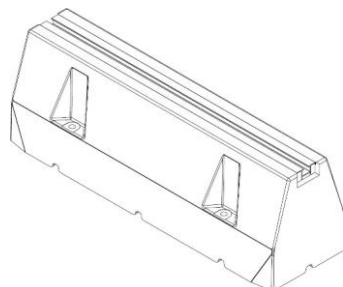


RB600/180/H200

Length: 600 mm
Width: 180 mm
Height: 200 mm
Load capacity: 350 kg/unit




RB250/MINI

Length: 250 mm
Width: 130 mm
Height: 50 mm
Load capacity: 120 kg/unit

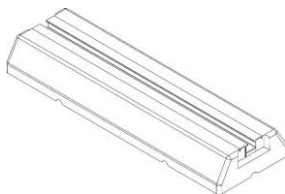


RB400/MINI

Length: 400 mm
Width: 130 mm
Height: 50 mm
Load capacity: 180 kg/unit

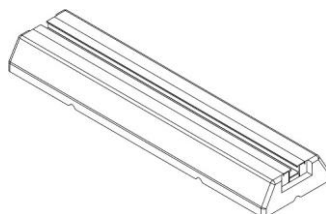

RB500/MINI

Length: 600 mm
Width: 130 mm
Height: 50 mm
Load capacity: 250 kg/unit

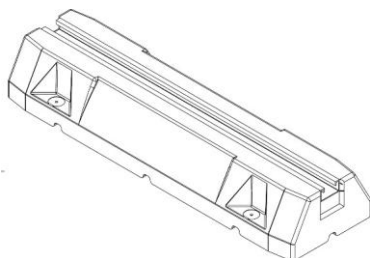

RB600/180H

Length: 600 mm
Width: 180 mm
Height: 95 mm
Load capacity: 300 kg/unit