

GREENHOOD FILM

PRODUCT SHEET

Experience GreenHood: Stretch-hood film of next generation with PCR. Ultimate fusion of strength, reliability, and environmental responsibility – all ready for forthcoming EU packaging regulation (PPWR) of 2030.

Meticulously engineered to meet and exceed the rigorous demands of modern logistics, all while taking a giant leap forward in reducing your carbon footprint.

Greenhood film delivers high performance, is tailored to meet the evolving needs of our clients, allowing them to maintain a competitive edge. Unleash the power of eco-friendly packaging with Greenhood – make a choice that matters.

Why select Green-Hood?

PROPERTIES	GREEN-HOOD	VIRGIN SH
STRENGTH (MPa)	● ● ● ● ●	● ● ● ● ●
ELONGATION (%)	● ● ● ● ●	● ● ● ● ●
SECANT MODULUS 1% (MPa)	● ● ● ● ●	● ● ● ● ●
SUSTAINABILITY	● ● ● ● ●	● ● ● ● ●

* Film properties measured of 110 micron SH film at PETRIO, a.s.
Actual properties may vary depending upon operating conditions and additive package.

DO YOU HAVE A QUESTION? CONTACT US! WE ARE HERE FOR YOU.



Mgr. Jozef Budovský

Sales Manager

+421 915 254 163

jozef.budovsky@petrio.sk



Mgr. Jurij Kazmiruk

Sales Manager

+421 911 629 672

kazmiruk@petrio.sk



PETRIO, a.s.

Vinárska cesta 1113


951 41 Lužianky, Slovakia

Business ID: 35823437

TAX ID: 2020225130

VAT no.: SK2020225130

Stretch-Hood Film
of Next Generation with **PCR**

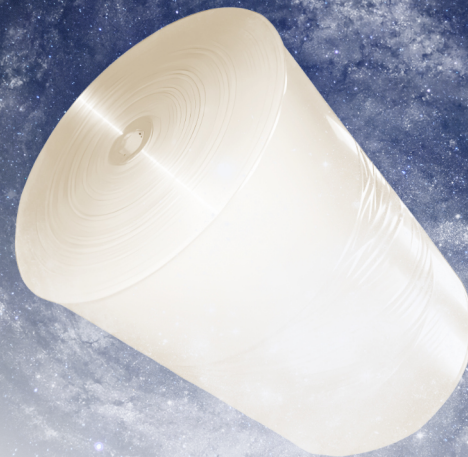

FEATURES

- ✓ innovative formula incorporating Post-Consumer Recycled (PCR) content
- ✓ solid durability: experience exceptional tear and puncture resistance
- ✓ reliable processability – high speed operability at your packing lines
- ✓ efficient holding force guaranteeing maximum load stability
- ✓ ready for the EU's 2030 packaging regulation
- ✓ 100% recyclability

APPLICATION

- › insulating materials
- › bricks, roof tiles
- › blocks
- › tiles
- › bags of bulk materials
- › white and black appliances
- › glass and paper products

PRODUCT TYPE

- › stretch-hood film

DESIGN

- › tube
- › possibility of production with or without gussets

DIMENSIONS

width:	800 – 5200 mm (with gussets)
thickness:	65 – 200 µm
roll weight:	maximum 1000 kg
outside diameter of roll:	up to 1200 mm
inner core diameter:	76 mm and 152 mm

MODIFICATIONS

- › transparent
- › coloured – varying degrees of opacity
- › UV stabilised (6 – 24 months)
- › antistatic
- › slip-resistant or non-slip
- › ionised
- › printed (maximum 6 colours)

BIC (SWIFT): OBKLSKBAXXX

IBAN: SK10 8370 0000 0061 6110 9282

www.petrio.sk