


SMARTLIFT

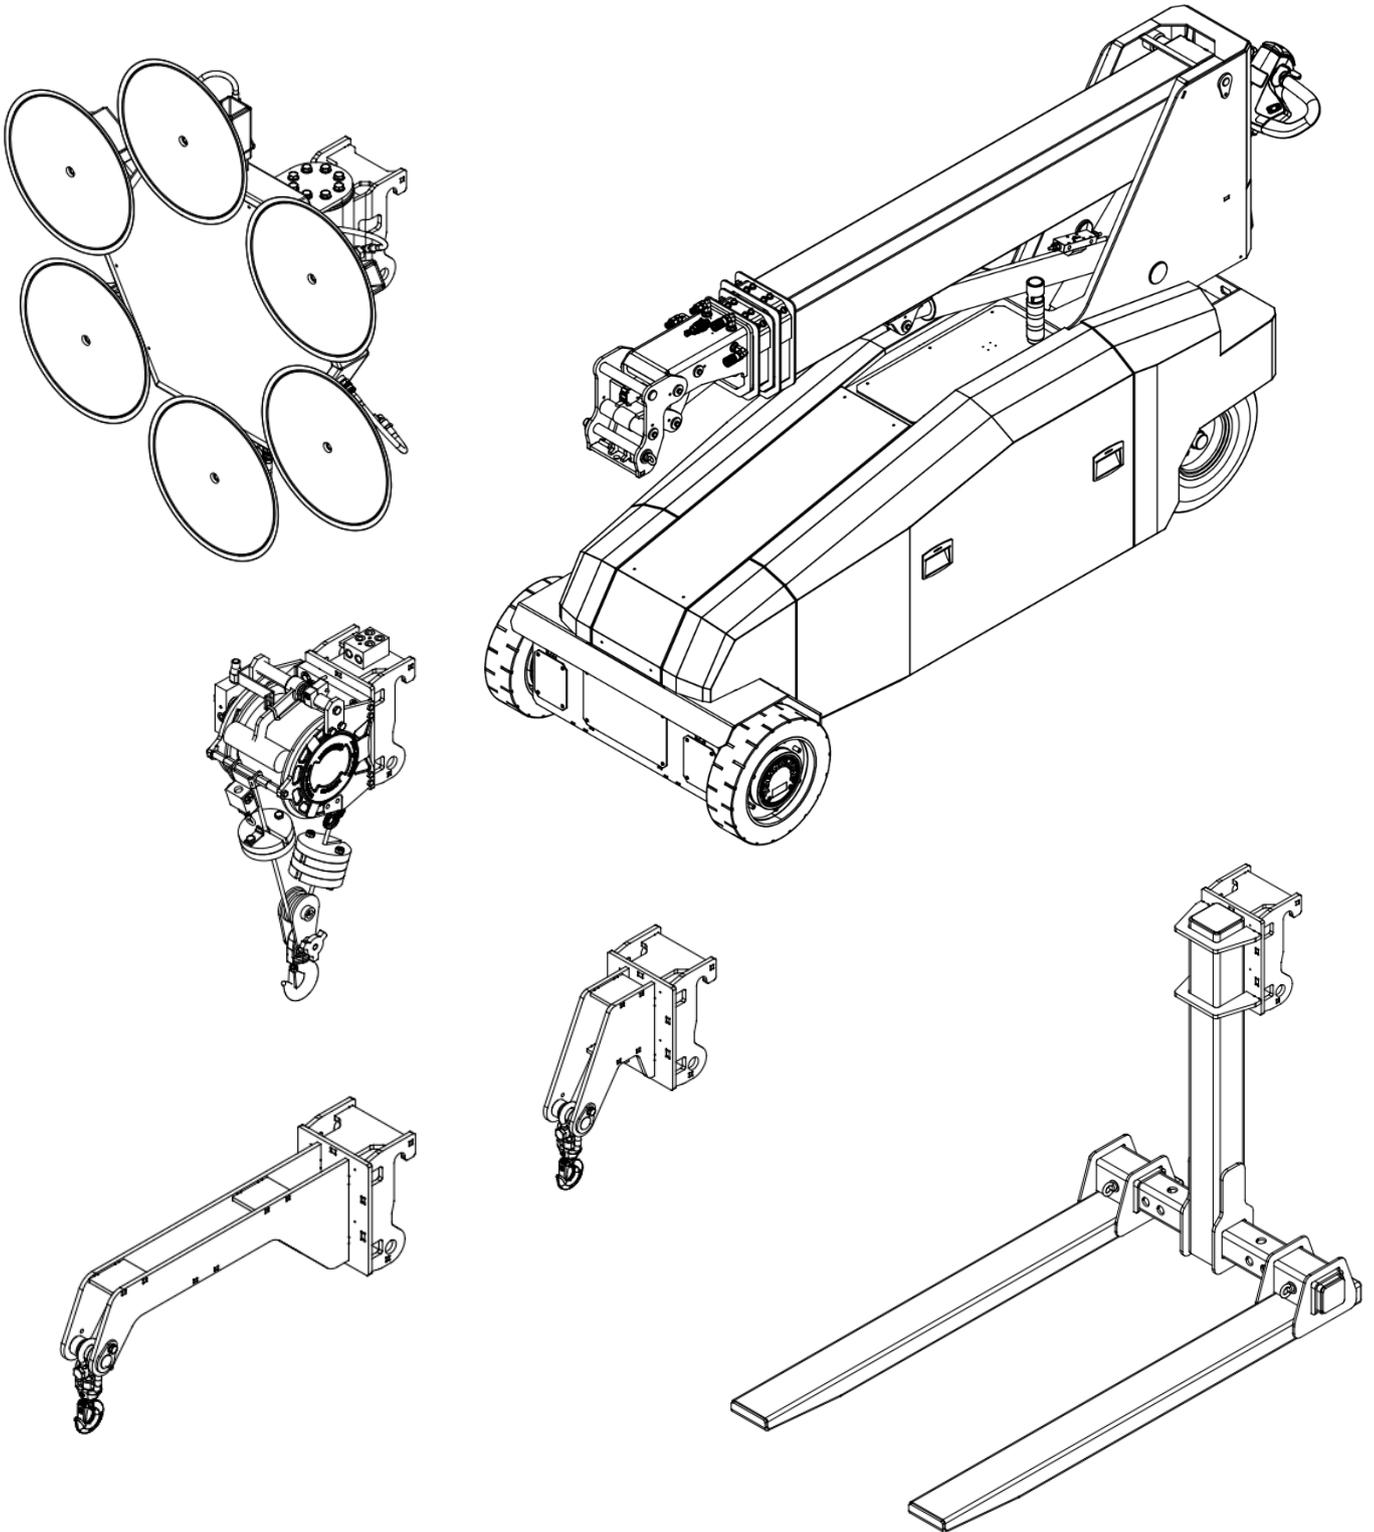

SLX 2000

Issued by:	Date:	Approved by:	Document name.:
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02

Table of Contents

1 SLX 2000	1
2 Attachments and accessories	2
2.1 Attachment – Vacuum yoke	2
2.1.1 Load chart – Vacuum yoke.....	3
2.1.2 Accessory – Extender – Vacuum yoke.....	4
2.1.3 Accessory – Trolley – Vacuum yoke and extenders	5
2.2 Attachment – Hydraulic winch	6
2.2.1 Load chart – Hydraulic winch	7
2.2.2 Accessory – Hydraulic winch – Hook block	8
2.2.3 Accessory – Trolley – Hydraulic winch	9
2.3 Attachment – Lifting hook	10
2.3.1 Load chart – Lifting hook.....	11
2.4 Attachment – Fly-Jib	12
2.4.1 Load Chart – Fly-Jib.....	13
2.5 Attachment – Pallet fork	14
2.5.1 Load chart – Pallet fork	15
2.6 Accessoires – Twin wheels	16

Issued by:	Date:	Approved by:	Document name.:
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02



1 SLX 2000

Technical specifications

Lifting height*	5,25m / 17.22ft
Extension of arm	2x 1150mm / 2x 3.77ft
Tilt	65° back / 98° fwd
Side shift	100mm / 4in
Charging voltage	230V / 110V
Charging time**	Approx. 8 hrs.
Running period**	Up to 10 hrs.
Front-wheel drive	2x1500W
Width	1,01m / 3.31ft
Curb weight (w/o tool)	1.750kg / 3860lb

*Depending on attachment

**Depending on battery option

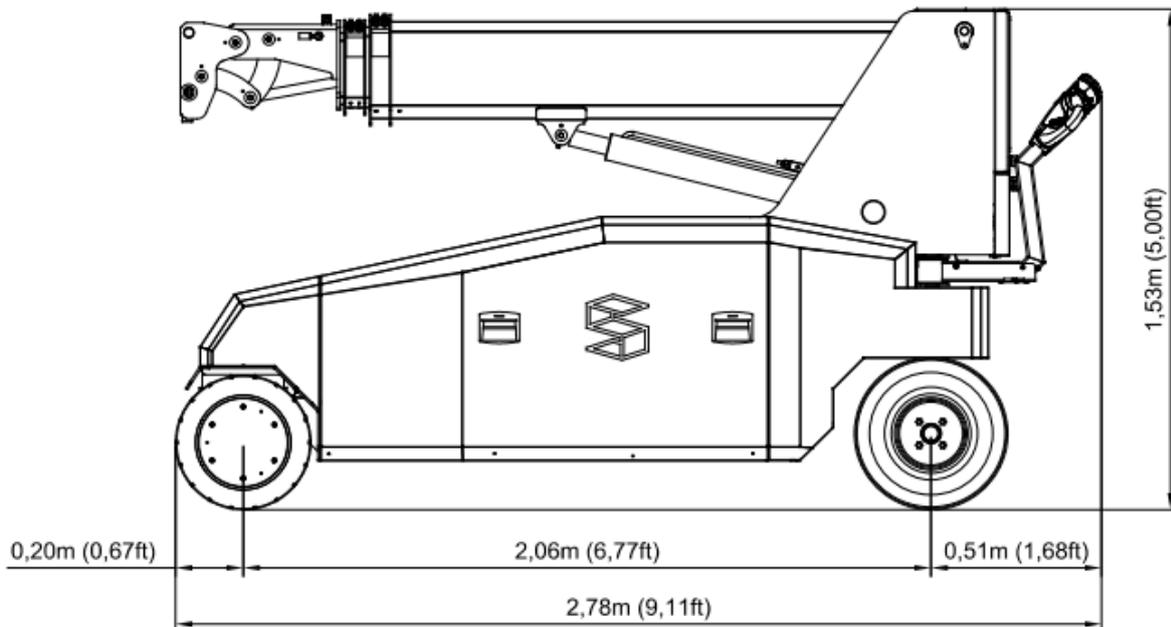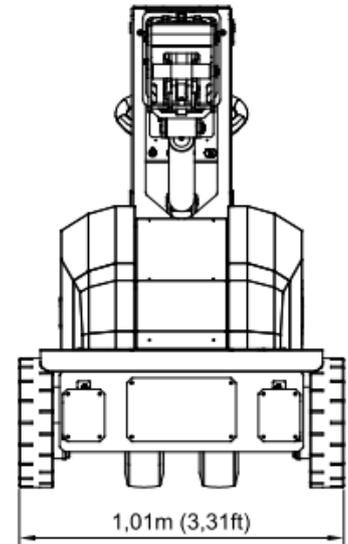

Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	1 of 16





2 Attachments and accessories

2.1 Attachment – Vacuum yoke

Item no. 3720100050


Technical specifications

Max. lifting capacity	1000kg / 2200lb
Lifting height	5,85m / 19.19ft
Horizontal reach	2,70m / 8.85ft
Rotation	Endless
Turn	88°
Suction cups	6 pcs.
Suction cup size	400mm / 16in
Attachment weight	150kg / 330lb

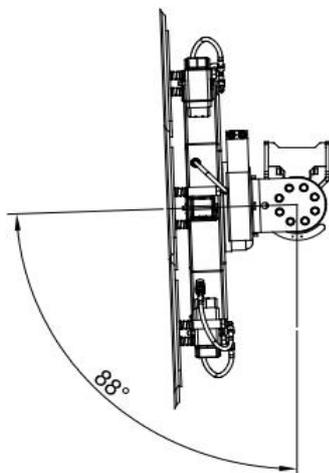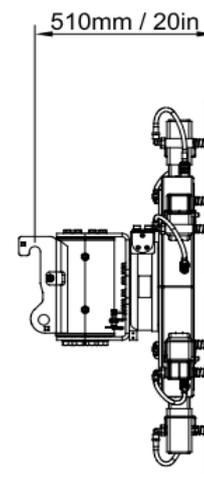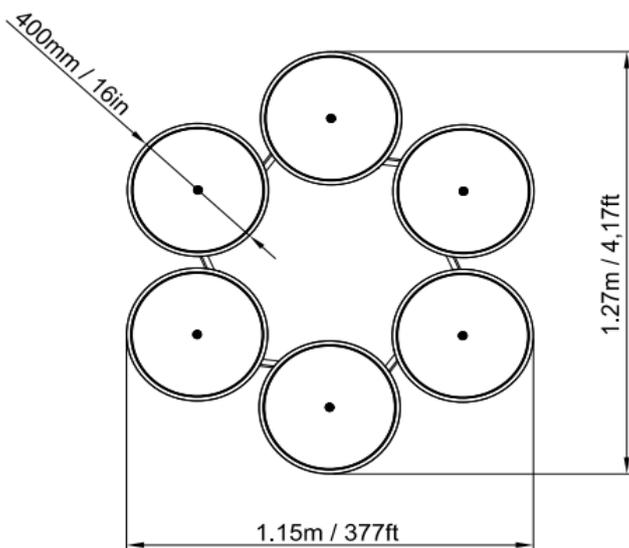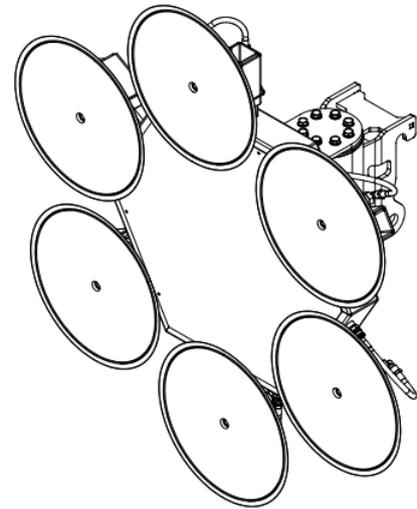

Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	2 of 16

2.1.1 Load chart – Vacuum yoke

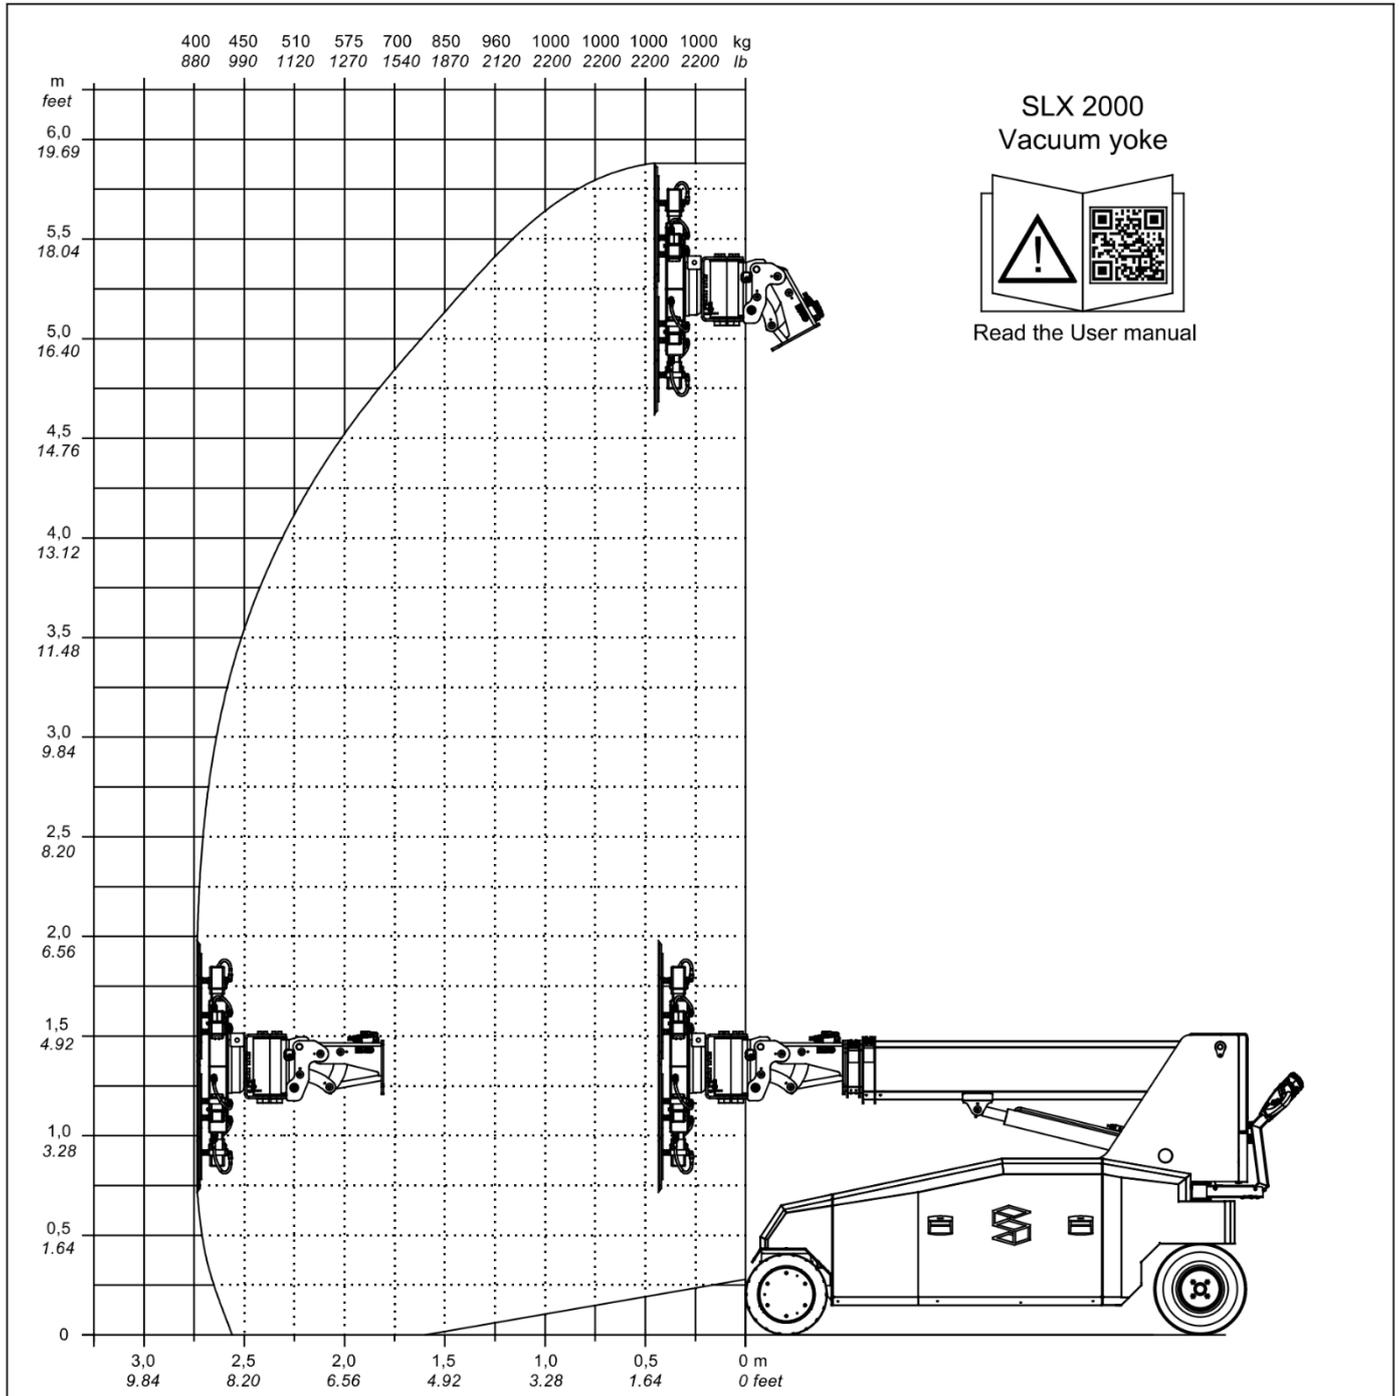




Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	3 of 16

2.1.2 Accessory – Extender – Vacuum yoke

Item no. 3720100250

Technical specifications

Total Length	690mm / 27in
Effective length	500mm / 20in
Positions for suction cup holder	5 pcs.
Distance between positions	100mm / 4in
Accessory weight	6kg / 13lb

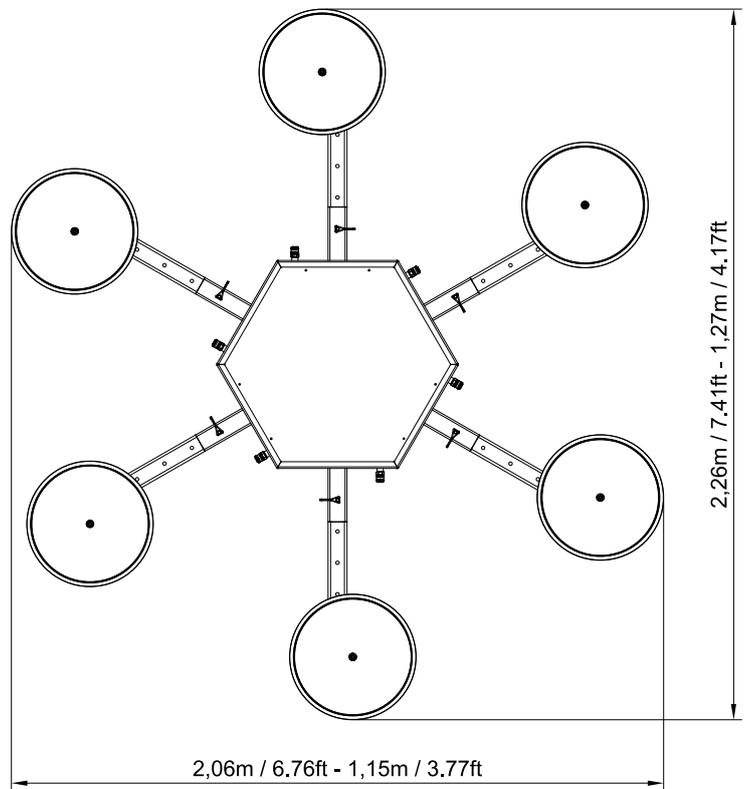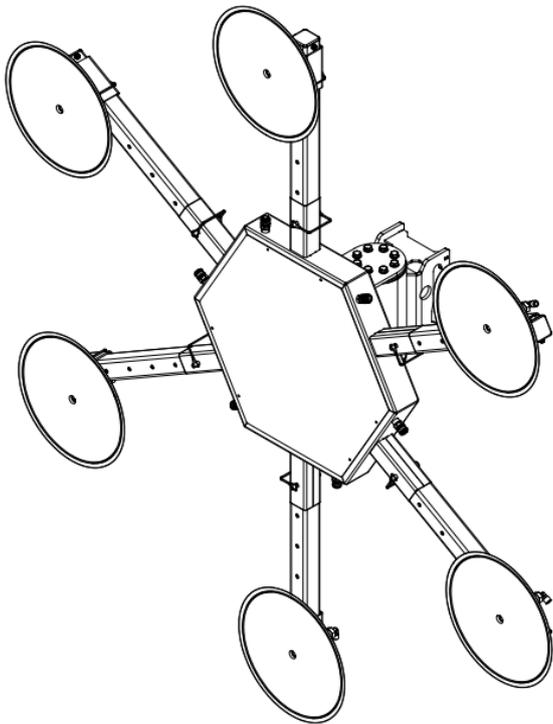
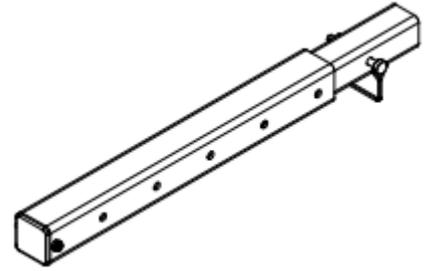


2.1.3 Accessory – Trolley – Vacuum yoke and extenders

Item no. 3720100450

Technical specifications

Capacity	1 Yoke and 6 extenders
Width	680mm / 27in
Length	810mm / 32in
Height	585mm / 23in
Industrial swivel caster with brake	2 pcs.
Industrial swivel caster	2 pcs.
Accessory weight	28kg / 62lb

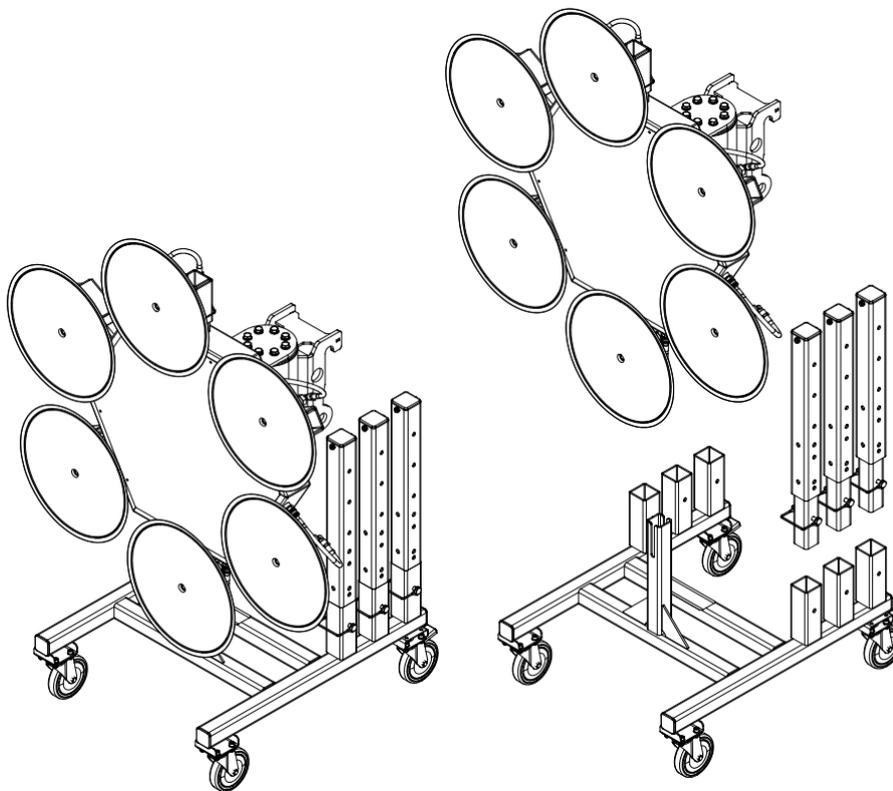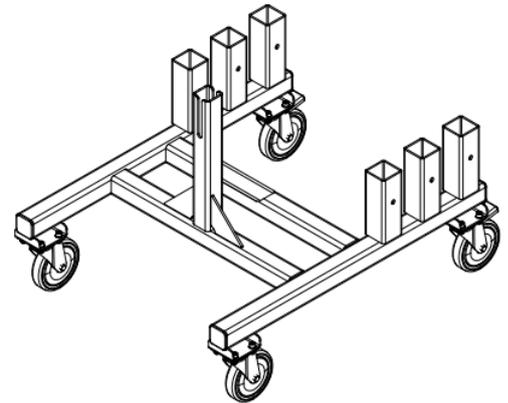


2.2 Attachment – Hydraulic winch

Item no. 3720100100

Technical specifications – Single line configuration

Max. lifting capacity	800kg / 1760lb
Lifting height	4,50m / 14.76ft
Horizontal reach	2,60m / 8.53ft
Wire rope, non-rotating	50m / 54.68yd
Wire rope diameter	8mm / 5/16in
Attachment weight	70kg / 154lb

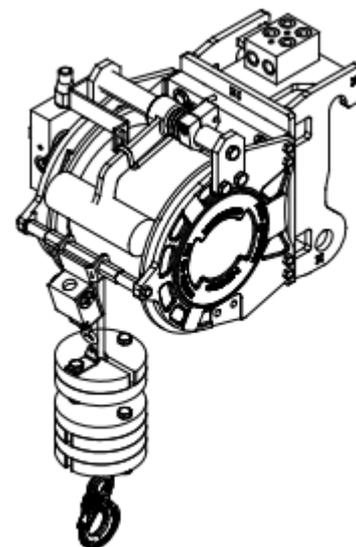



Item no. 3720100100+014111

Technical specifications – Dual line configuration

Max. lifting capacity	1500kg / 3300lb
Lifting height	4,30m / 14.10ft
Horizontal reach	2,60m / 8.53ft
Wire rope, non-rotating*	50m / 54.68yd*
Wire rope diameter	8mm / 5/16in
Attachment weight	75kg / 165lb

* Dual wire and therefore effective span 25m / 27.34yd

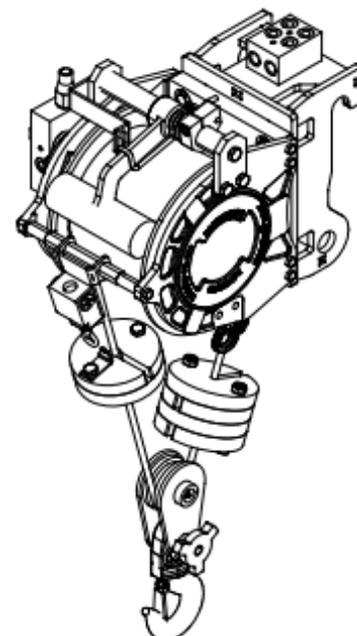


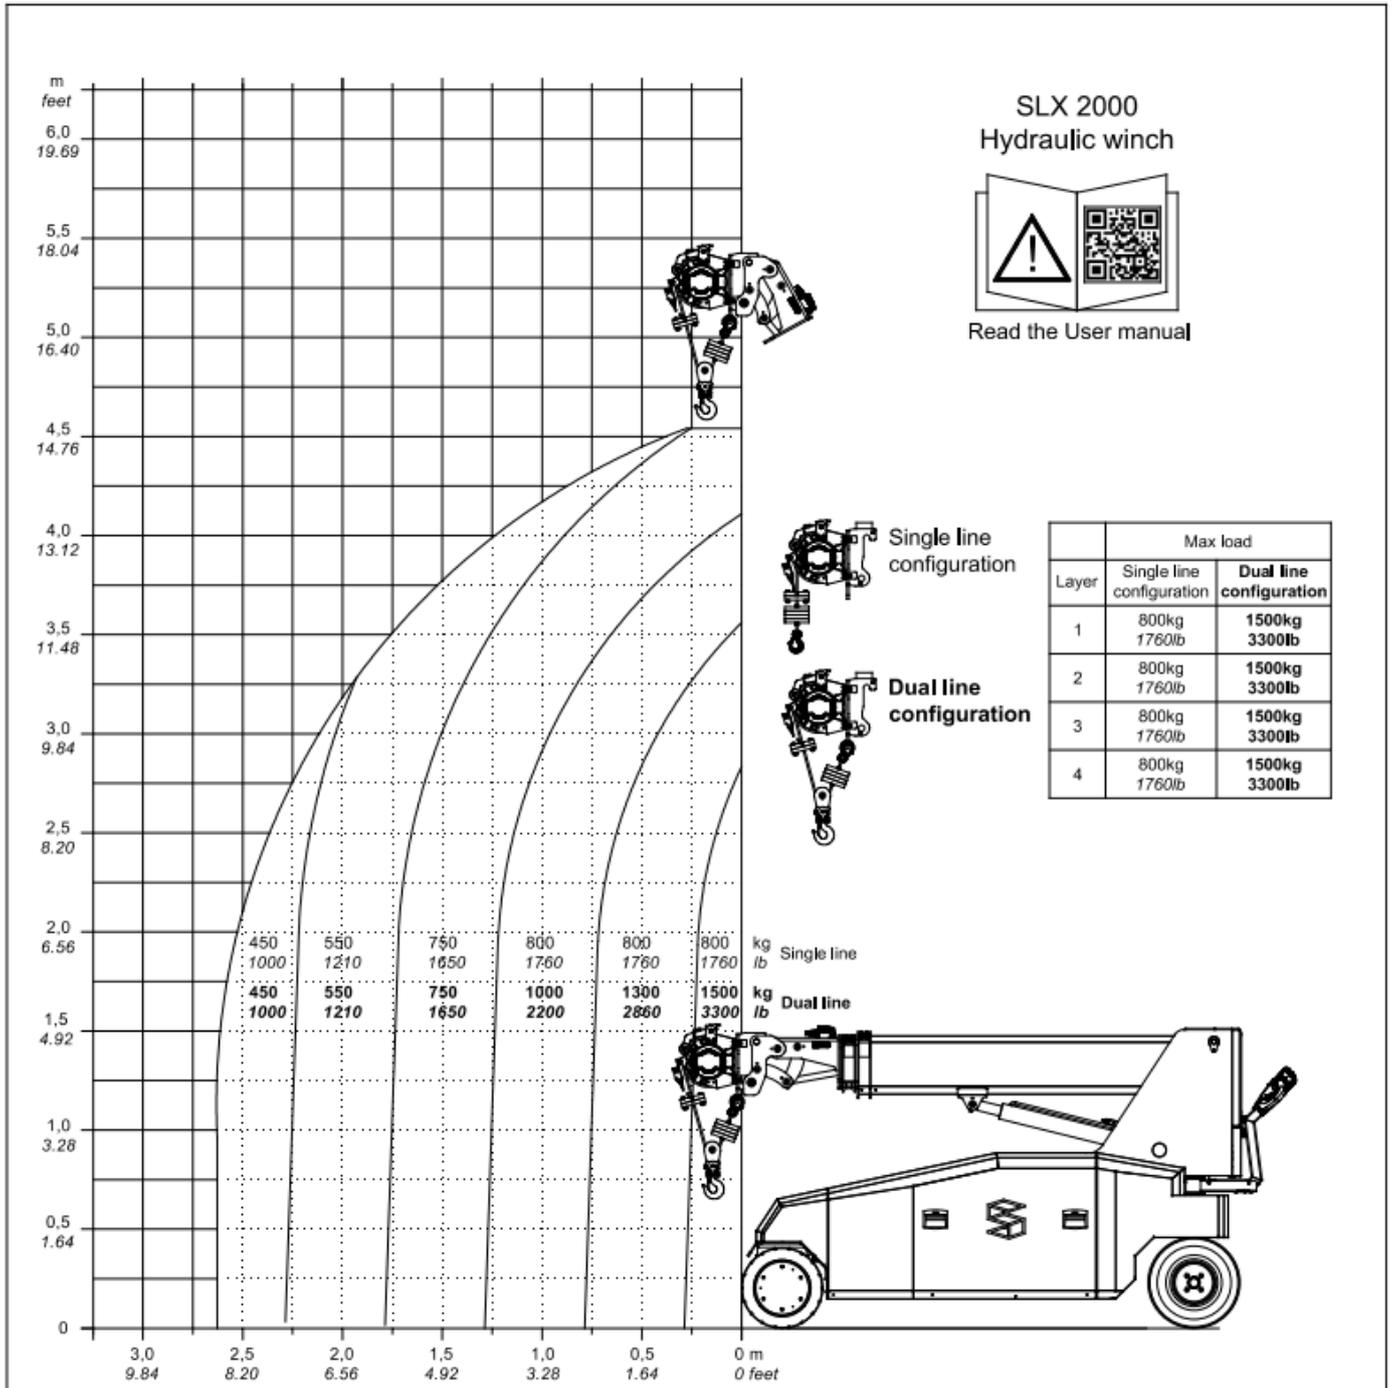
2.2.1 Load chart – Hydraulic winch


2.2.2 Accessory – Hydraulic winch – Hook block

Item no. 014111

Technical specifications

For wire cable diameter	7-10mm / 5/16in - 25/64in
Accessory weight	4kg / 9lb

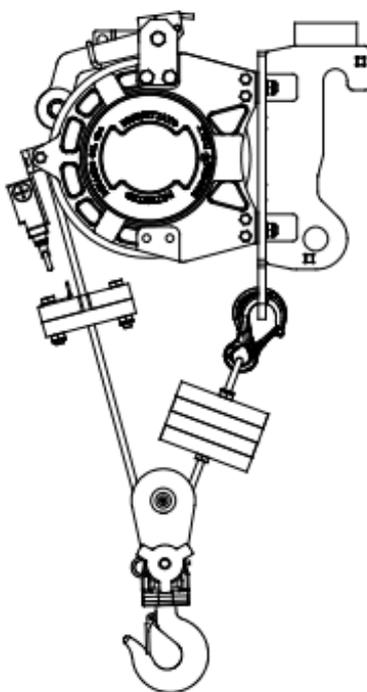
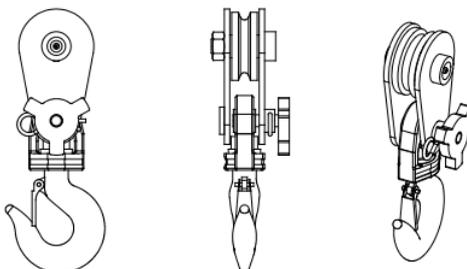


2.2.3 Accessory – Trolley – Hydraulic winch

Item no. 3720100500

Technical specifications

Capacity	1 Hydraulic winch
Width	570mm / 23in
Length	530mm / 21in
Height	790mm / 31in
Industrial swivel caster with brake	2 pcs.
Industrial swivel caster	2 pcs.
Accessory weight	15kg / 33lb

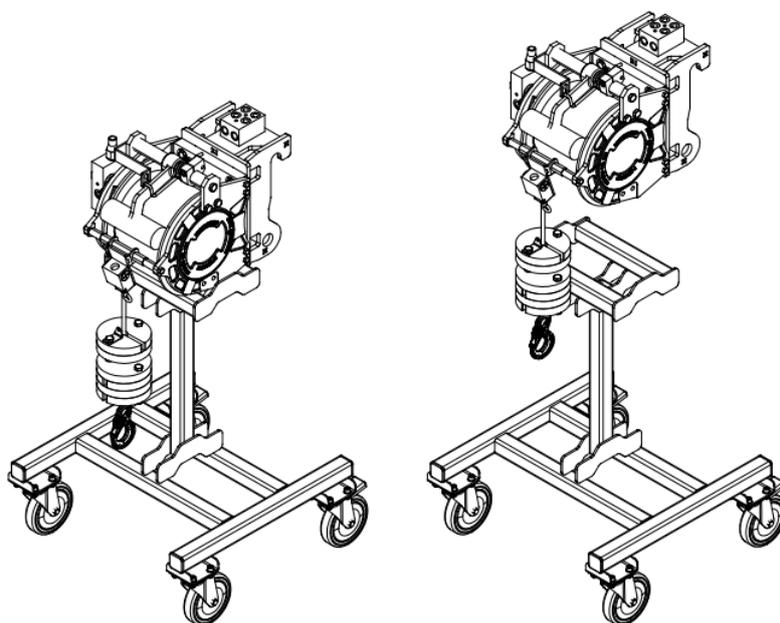
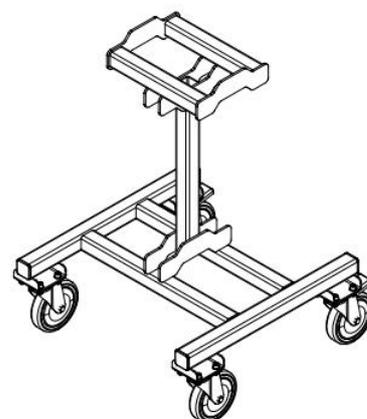


2.3 Attachment – Lifting hook


Item no. 3720100150

Technical specifications

Max. lifting capacity	1400kg / 3085lb
Lifting height	5,35m / 17.55ft
Horizontal reach	2,50m / 8.20ft
Effective length	320mm / 12.60in
Attachment weight	20kg / 44lb

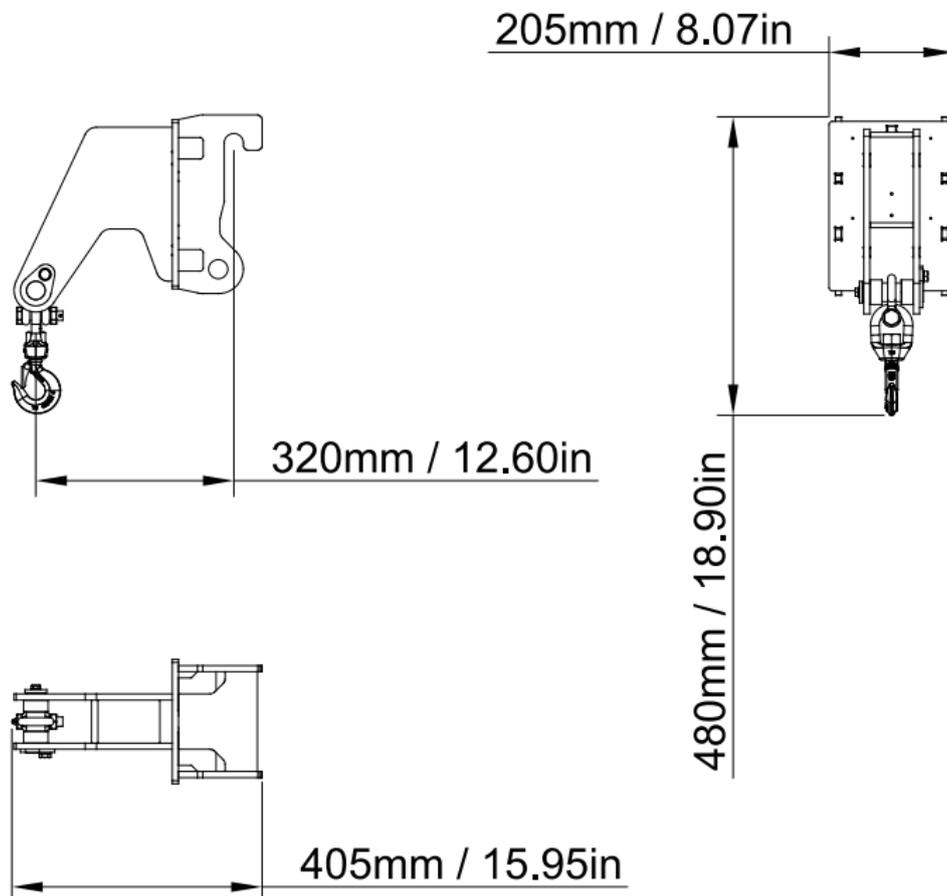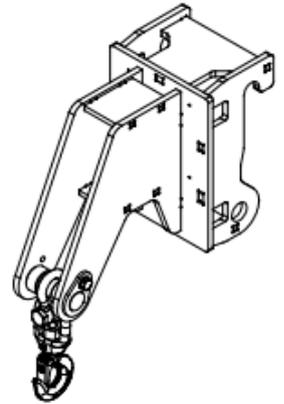

2.3.1 Load chart – Lifting hook


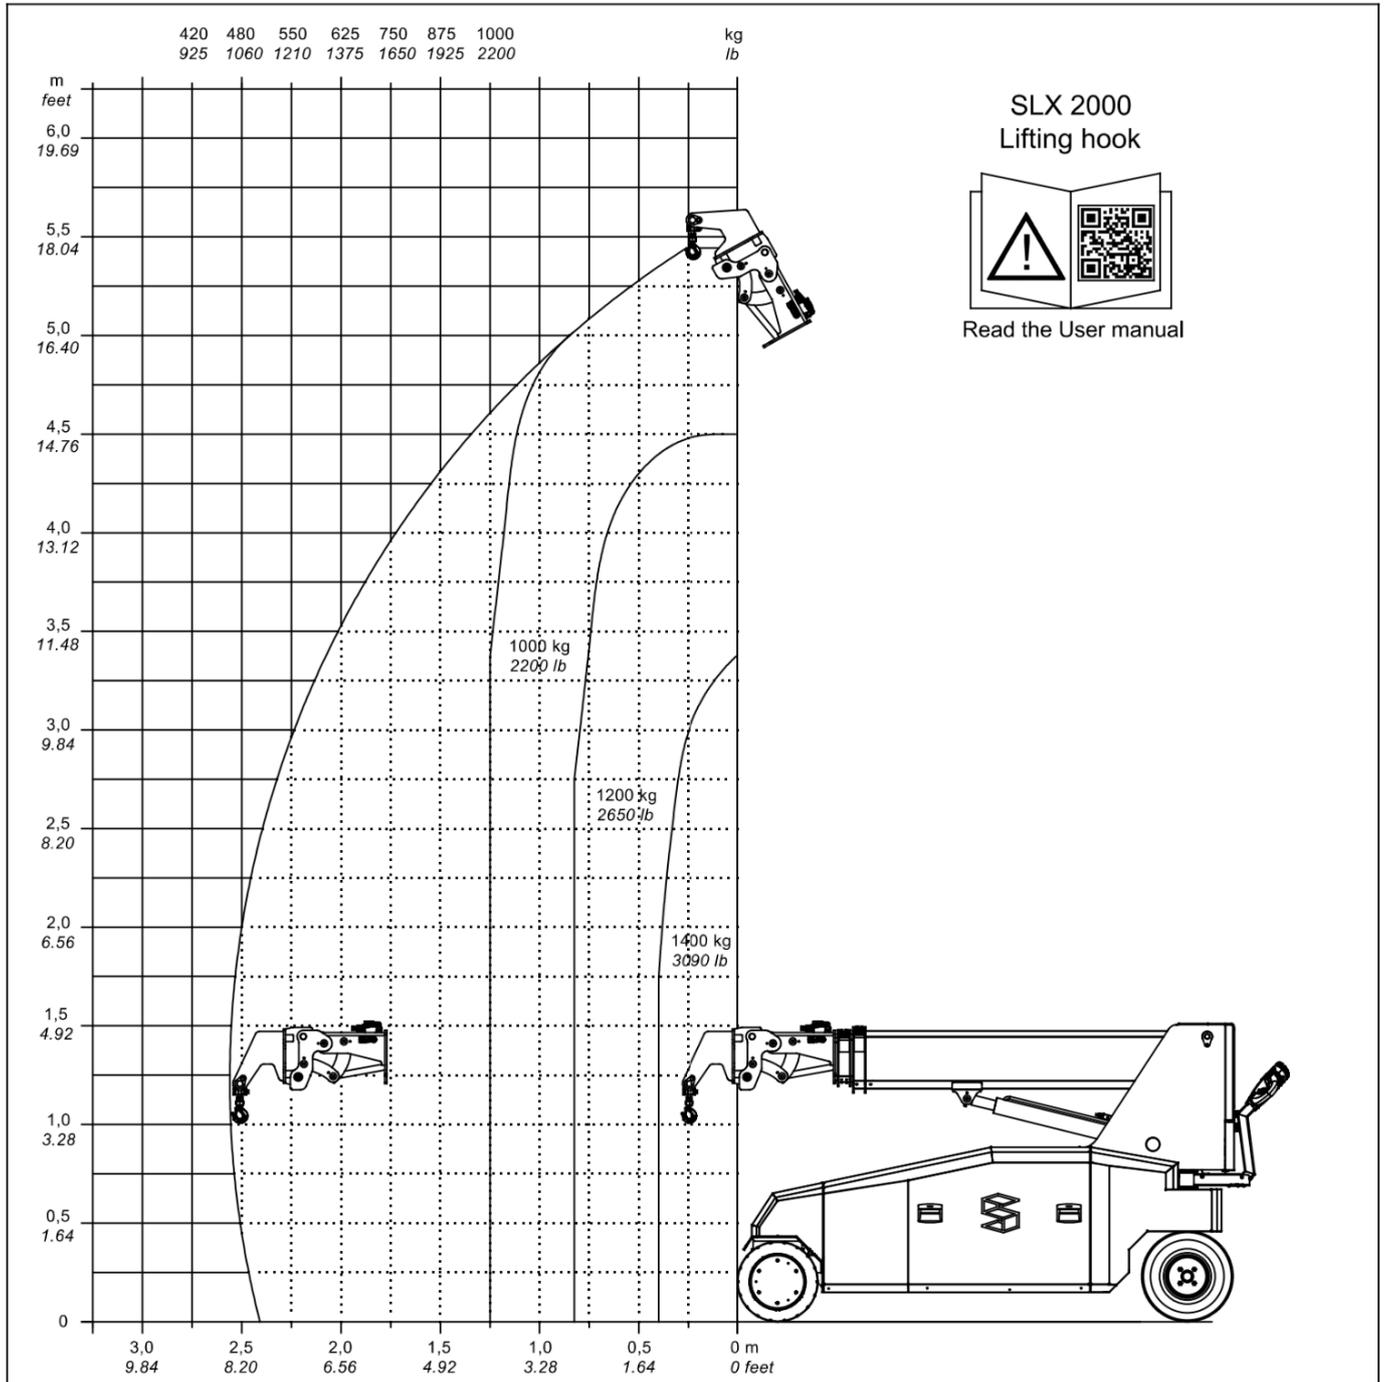


2.4 Attachment – Fly-Jib

Item no. 3720100300


Technical specifications

Max. lifting capacity	800kg / 1760lb
Lifting height	5,85m / 19.19ft
Horizontal reach	3,00m / 9.85ft
Effective length	800mm / 2.62ft
Attachment weight	30kg / 66lb

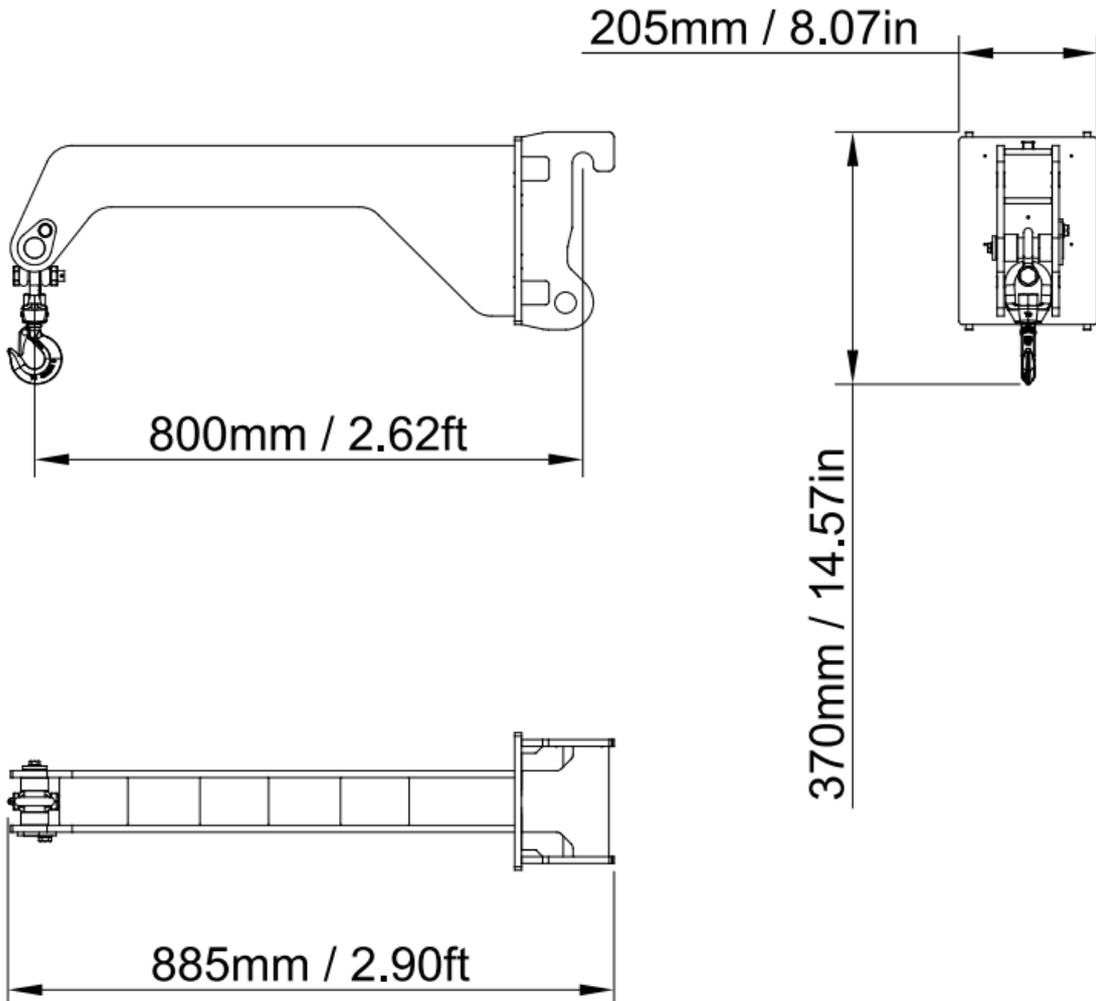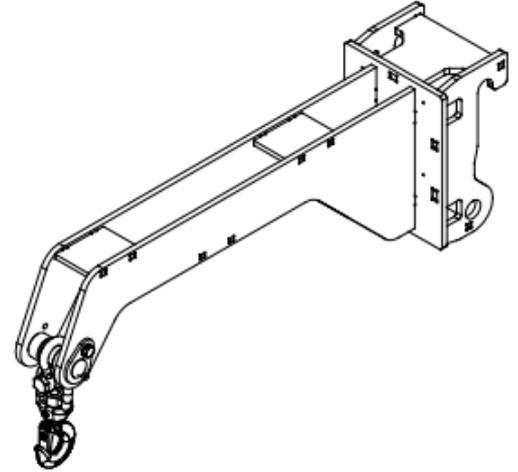



2.4.1 Load Chart – Fly-Jib

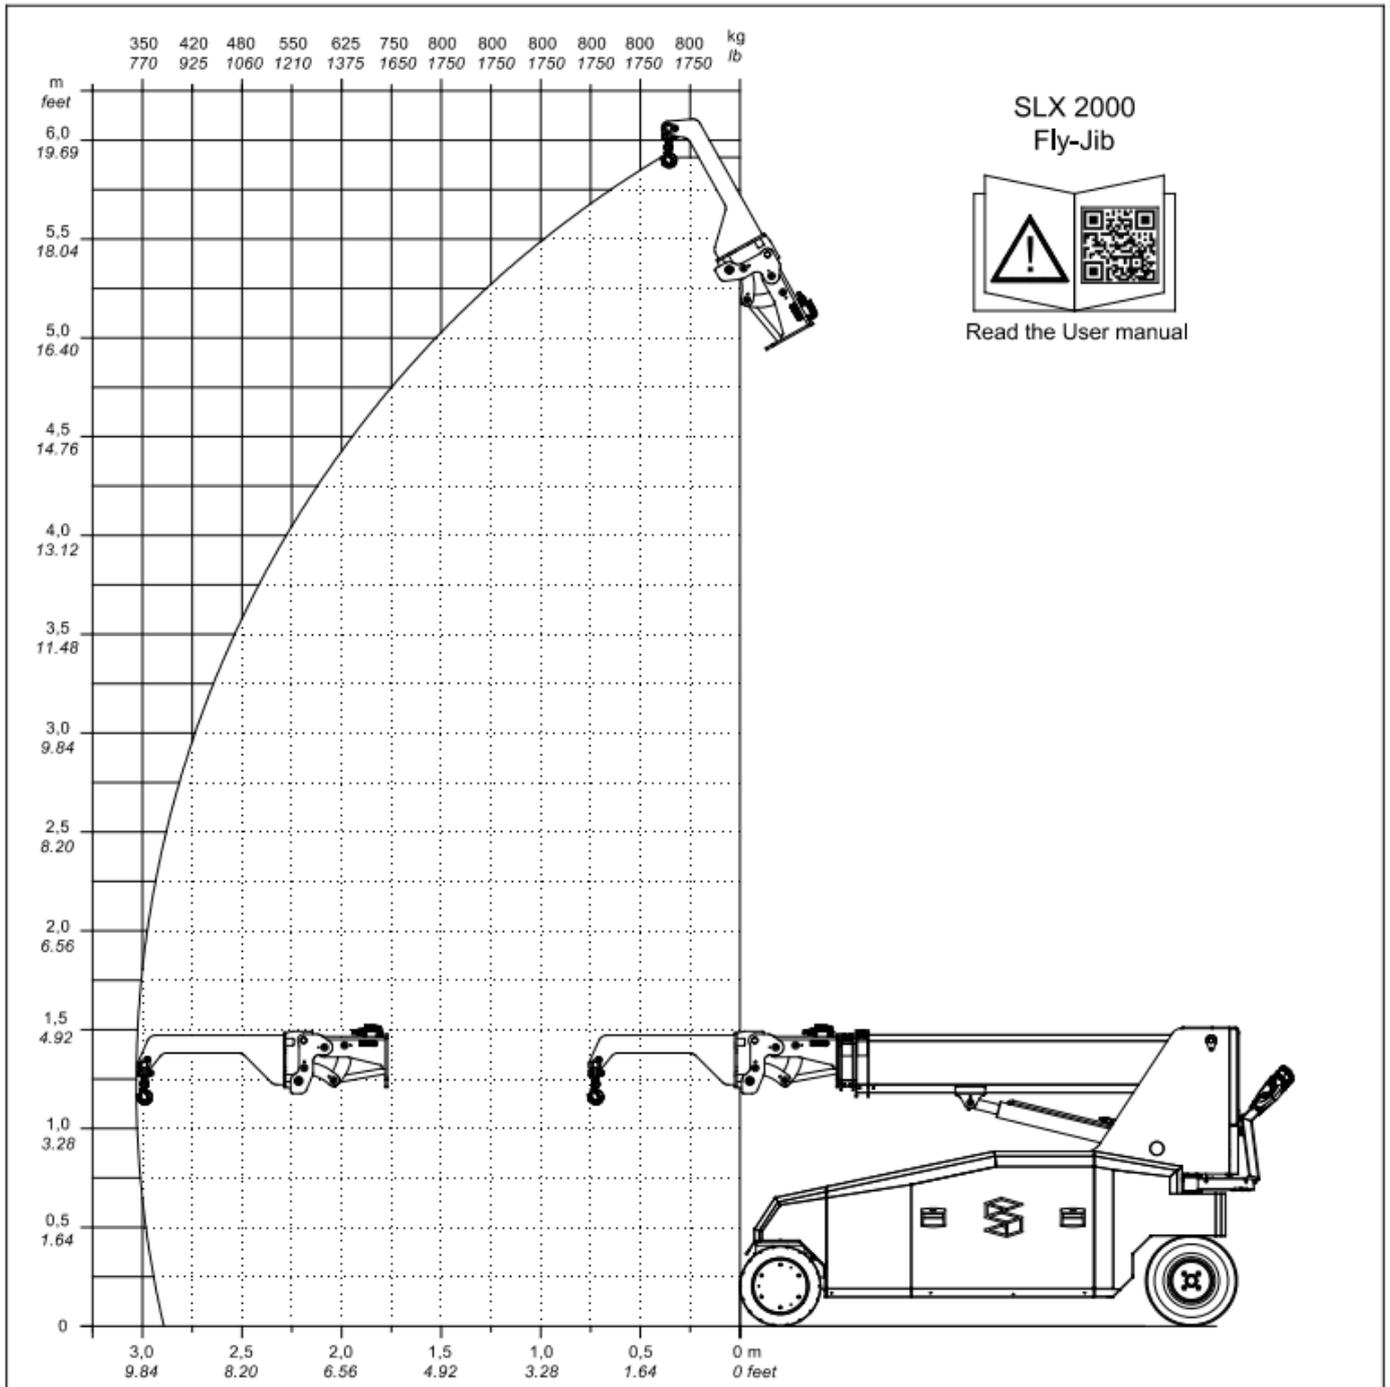






Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	13 of 16

2.5 Attachment – Pallet fork

Item no. 3720100200


Technical specifications

Max. lifting capacity	800kg / 1760lb
Lifting height	4,35m / 14.27ft
Horizontal reach	3,00m / 9.85ft
Fork length	1,20m / 3.94ft
Fork width	0,79m / 2.60ft
Transport length	1,41m / 4.64ft
Transport height	300mm / 11.80in
Attachment weight	80kg / 176lb

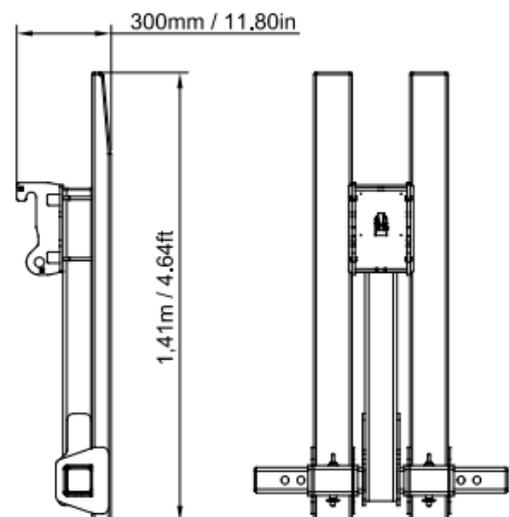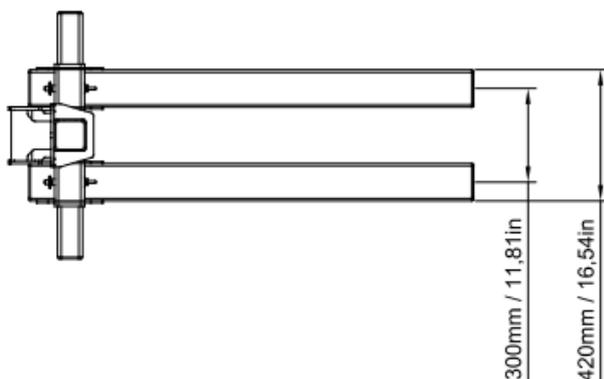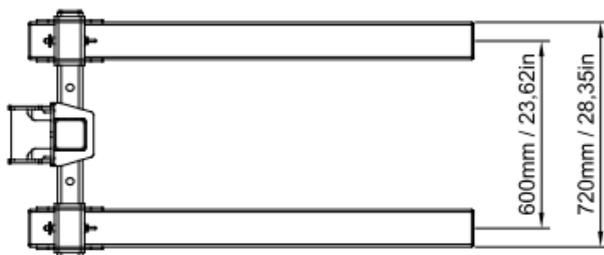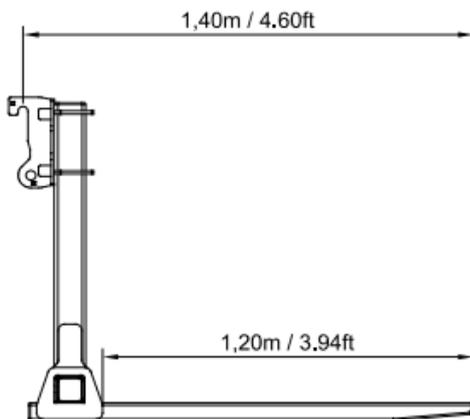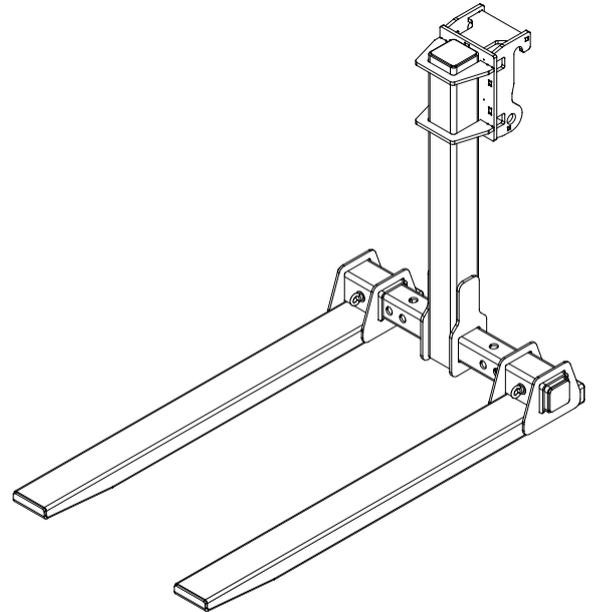

Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	14 of 16

2.5.1 Load chart – Pallet fork

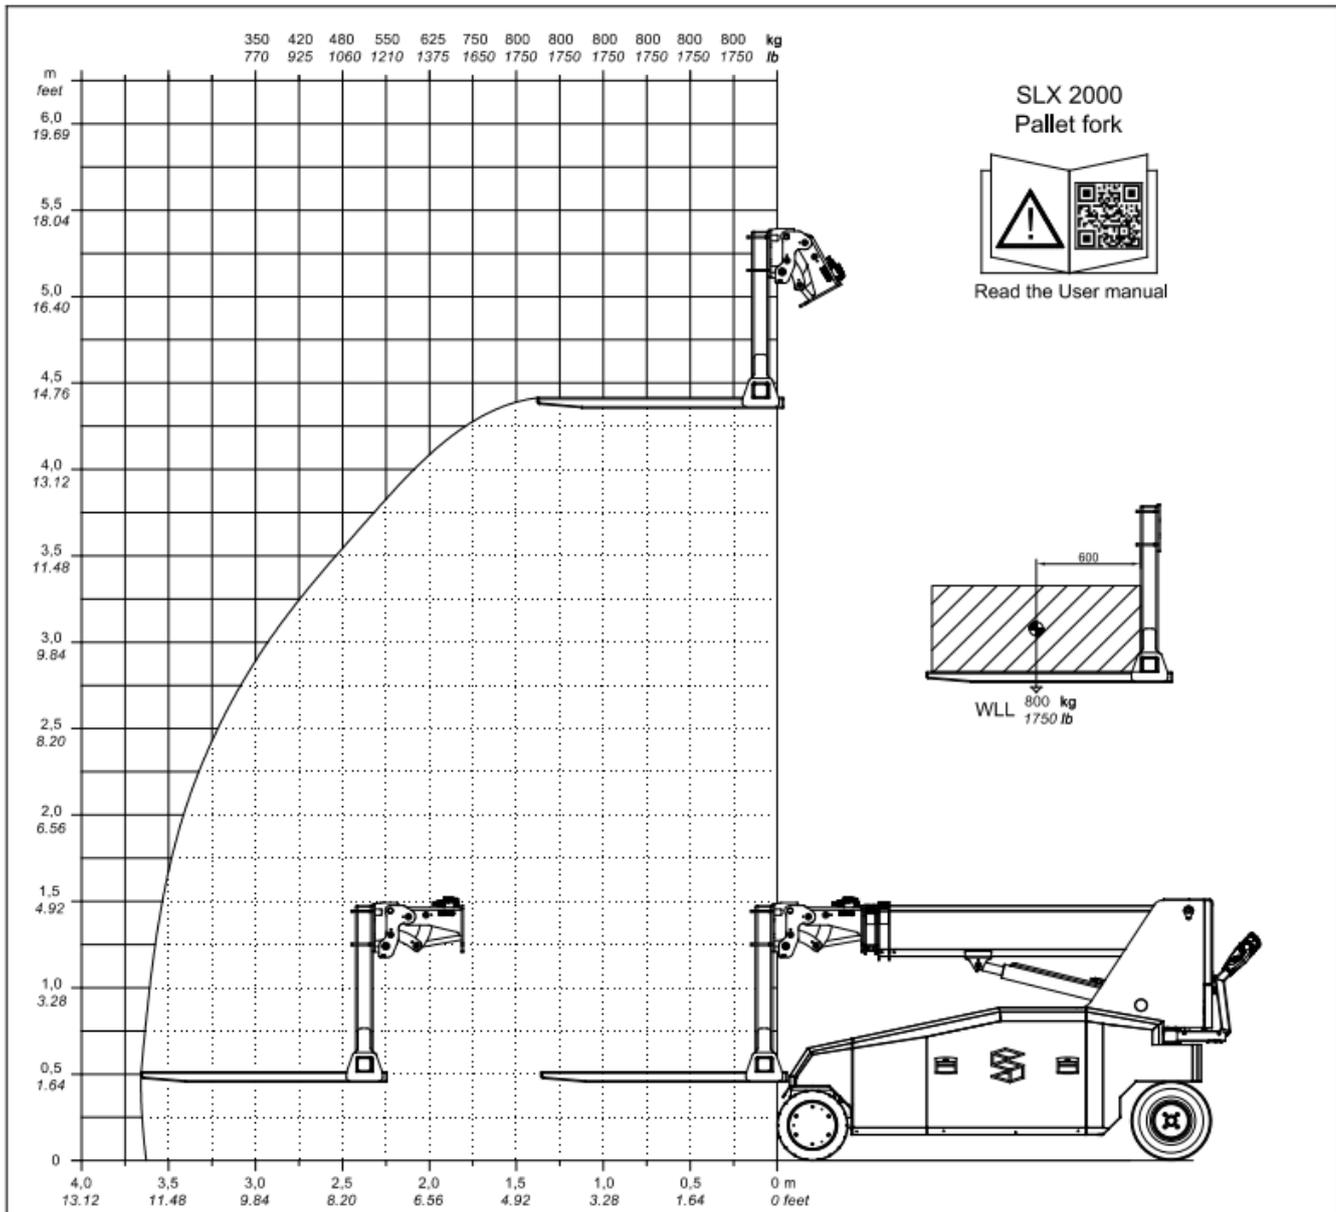



Issued by:	Date:	Approved by:	Document name.:	Page
TST	26-01-2026	MR	DATA SHEET - SLX 2000 EN 02	15 of 16


2.6 Accessoires – Twin wheels

Item no. 3720100600

Technical specifications

Machine Width	1,24m / 4.07ft
Wheel Width	220mm / 8.66in
Accessory weight	46kg / 100lb

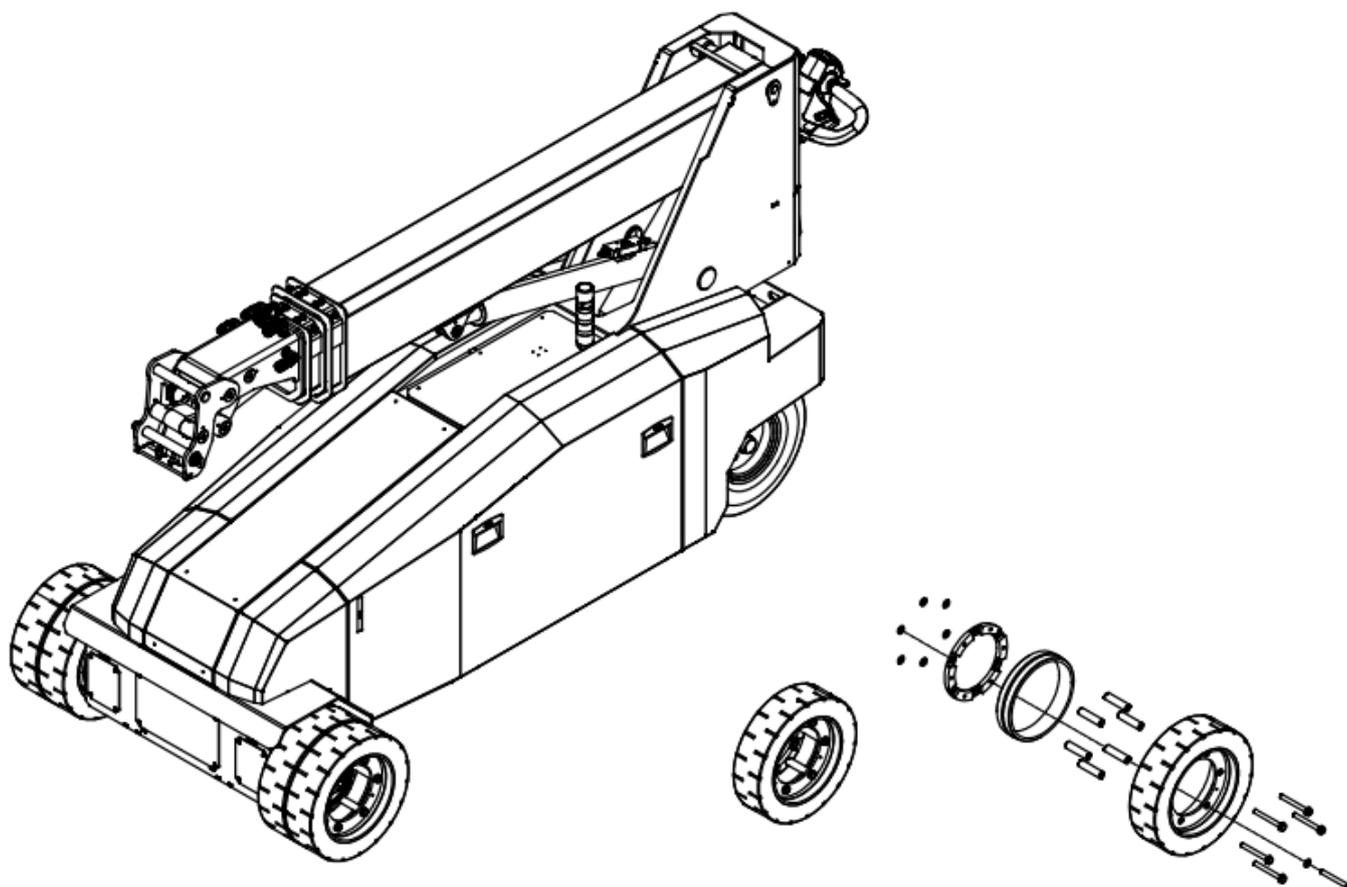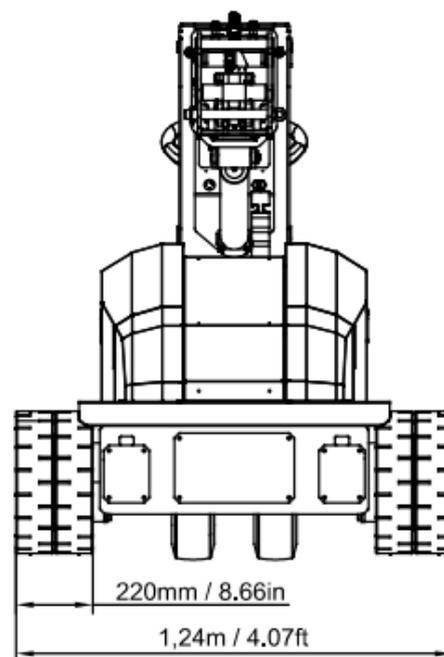



SMARTLIFT[®]

N.A. Christensensvej 39,
DK-7900 Nykøbing Mors
Tel.: +45 97 72 29 11

E-Mail: smart@smartlift.com
www.smartlift.com