

FOR INDOORS, OUTDOORS, TOP AND BOTTOM ...

THE PRODUCT OVERVIEW FROM JORDAN LACKE 2025/2026



SHOW WHAT YOU ARE ABLE TO DO!
WWW.JORDANLACKE.DE

JORDAN Lacke is a brand of PLANTAG Coatings GmbH. Based on the strong alliance of this group, we have a very good network of subsidiaries and distributors as well as our own innovative laboratories. We ensure short ways to our customers on the one hand, but also a broad expertise and innovative surface solutions using the most modern raw materials.

Based on this, we have been developing high-quality products for over 125 years. In all those years, we have established a firm place for ourselves with joineries and are proud of a variety of satisfied and long-standing partners.

After all, you are at the centre of everything we do. For carpenters, there are a multitude of application areas and uses for our products in everyday life. And so our new application-oriented product overview is designed to help you in practice to quickly find the perfect surface solution.

Discover on the next pages what has impressed our customers and partners for over 125 years. Find new trends and show what you can do with the JORDAN Lacke product world.



DISCOVER JORDAN LACKE AND OUR WIDE RANGE OF PRODUCTS FOR ALL APPLICATIONS

Quick
overview
from
page 86



FOR FURNITURE

18 – 35

For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, oils and stains.

FURNITURE

FOR KITCHENS & BATHROOMS

36 – 45

Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.

KITCHEN
& BATH

FOR PARQUET & STAIRS

46 – 53

To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

PARQUET
& STAIRS

FOR DOORS

54 – 63

Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

DOORS

FOR INTERIOR FITTINGS

64 – 73

For a healthy indoor climate - with our decopaint-compliant lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.

INTERIOR
FITTINGS

FOR OUTDOOR USE

74 – 77

Our biocide- and pesticide-free wood preservative for exterior use not only protects wood surfaces, but also the environment: effective against animal and plant pests.

OUTDOOR

FOR CARE & CLEANING

78 – 83

Whether by hand or machine: with our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

CARE &
CLEANING

ADDITIONAL PRODUCTS

84 – 85

Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

ADDITIONAL
PRODUCTS

COMPETENCE IN LACQUER LOCALLY PRESENT

JORDAN LACKE - YOUR EXPERT
IN TERMS OF COATINGS

1 COMPETENCE IN LACQUER FOR
ROBUST SURFACES AND HIGHEST RESISTANCE.
THE PERFECT PROTECTION

2 COMPETENCE IN LACQUER FOR
FINE AND HIGH-QUALITY SURFACES.
THE PERFECT FINISH

3 COMPETENCE IN LACQUER FOR
A VARIETY OF DESIGN POSSIBILITIES.
THE PERFECT DESIGN

4 COMPETENCE IN LACQUER FOR
FUNCTIONAL SURFACES.
THE PERFECT FUNCTION

5 COMPETENCE FOR THE ENVIRONMENT
CONSCIOUS ACTION
BEYOND THE SURFACE

Because it is important what you put on top:
The PCG helmet is the sign of highest quality regarding
surfaces. Protection, finish, design, and function - our
helmet serves as a symbol for all these features.

In our company you will always find your direct
contact person, be it inhouse or among our field staff.
We offer commercial and technical customer service.
Our international experts support you worldwide.

Discover our customer service at jordanlacke.de/en/
and quickly find assistance in your vicinity.

OUR FIELD STAFF IS:

- + always quickly available locally
- + working for you at all times
- + competent and friendly
- + always professionally up to date





A STRONG GROUP WORLDWIDE

CONCENTRATED COMPETENCE FOR
A VERSATILE PRODUCT PORTFOLIO

OUR INTERNATIONAL SUBSIDIARIES:

- **BENELUX** PLANTAG COATINGS GROEP B.V.
- **BRASIL** PLANTAG DO BRASIL Ltda
- **INDIA** PLANTAG COATINGS INDIA Pvt. Ltd.
- **POLAND** PLANTAG Sp. z o.o.
- **SWITZERLAND** PLANTAG SCHWEIZ GMBH
- **TÜRKEİ** PLANTAG ENDÜSTRİYEL BOYA
VERNİK SANAYİ VE TİC. LTD. ŞTİ


OUR ADVANTAGES AT A GLANCE:

- ✚ MODERN COATING SYSTEMS
- ✚ GOOD PRICE-PERFORMANCE RATIO
- ✚ CERTIFIED QUALITY
- ✚ CONSULTING AND TECHNICAL SUPPORT LOCALLY
- ✚ DEVELOPMENT IN COOPERATION WITH THE CUSTOMER
- ✚ SYSTEM SUPPLIER WITH OWN LABORATORIES
- ✚ FAST DELIVERIES WORLDWIDE



FROM DETMOLD TO THE WHOLE WORLD

EXPERIENCE AS A BASIS FOR INNOVATION

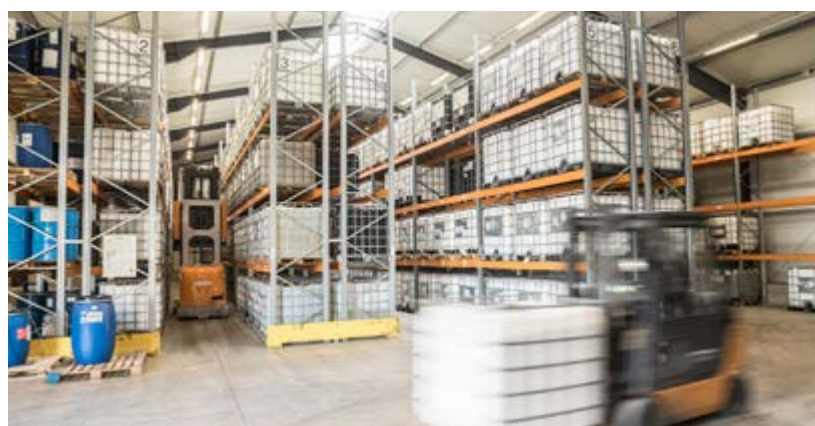



WILHELM BAUMANN

LACKFABRIKATION · SEIT 1953

Lacke für die Holzoberflächenbehandlung

VARNISHES FOR WOOD SURFACE TREATMENT SINCE 1953

Since 1953 we have consequently developed from a small medium-sized company to a company group acting worldwide. Today the family-owned company is managed already by the third generation. Thanks to our international network of subsidiaries, dealers and production sites we ensure short ways. We know the local markets and conditions.

As a manufacturer of coatings the PCG Group is a specialist for surface technology. We always have the matching innovative solutions for your product portfolio and your individual production-related conditions. We distinguish ourselves by our experience and commitment for quite special things. Worldwide customers from many different sectors have been our satisfied partners for many years. With in-depth knowledge, service-orientated actions and futuristic products we continuously achieve added value for our customers.

We are strong in coatings – you may rely on this.



STATE-OF-THE-ART PRODUCTION

Sophisticated production sites and efficient processes enable us to manufacture the high-quality coatings, stains and patinating systems. Our wide production range comprises nitro, SH, PUR, UV, and water-based coating systems.

At two German sites we annually manufacture over 15,000 tonnes of coatings and stains and sell them worldwide.

THE SITE AS A QUALITY PROMISE:

„MADE IN GERMANY“

Our production sites have been certified by the TÜV NORD and comply with highest standards. The certification acc. to DIN ISO 9001 verifies our high quality standard and innovative capabilities.


WE MANUFACTURE COATINGS FOR:

- + FURNITURE SURFACES
- + FLOOR SURFACES
- + FINISH FOILS AND EDGES
- + HARD FIBRE AND MDF SURFACES
- + GLASS, METAL AND PLASTIC SURFACES
- + SPECIAL APPLICATIONS





**STRONG REPERTOIRE,
STRONG IN COATINGS**
EVERYTHING FOR THE PERFECT FINISH

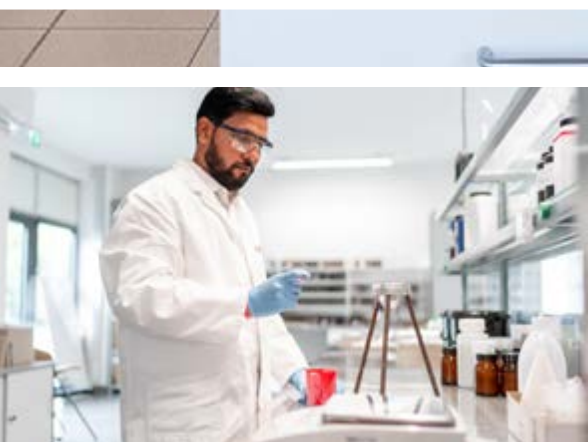

We consider ourselves as a reliable partner regarding the manufacture and sale of coatings, paints, stains, patinating systems as well as waxes and oils. Three companies are managed under the PCG Group's roof that distinguish themselves and complement each other by various core competences:



PRODUCTS FOR INDUSTRY

Your innovative partner in the field of industrial coating of wood and wood materials. Individual product solutions in the sector of UV curing, solvent-based as well as aqueous coating systems are some of PLANTAG Coatings' core competences. In our own laboratories we continuously develop new products and supervise them up to their marketability.



PRODUCTS FOR CRAFTSMEN

Our subsidiary's core competence is the development of application-optimized products for innovative joinery and carpentry. JORDAN Lacke can look back on over 125 years of successful history and has belonged to the PCG Group since 2013.



COATING OF FINISH FOILS AND EDGES

As a development and production company BLC Lack Chemie has been for many years an absolute specialist for the development of coatings for finish foils and edges. The products developed and manufactured by BLC are sold by PLANTAG Coatings.

PLANTAG® TESTED QUALITY

Quality assurance at the highest level. E.g. the test possibilities comprise testing of classic wear effects, ball drop tests, identification of several scratch resistance grades such as those based on the Martindale process, adhesion tests, substrate coating behaviour influenced by the climate as well as many other processes.



When we introduce a product onto the market we know what we are talking about and give it our seal „PCG PLANTAG Tested Quality“

PLANTAG® LABORATORIES

In several laboratories over 30 trained employees develop new surface materials or adapt existing coating systems to the customers' specifications. We take our staff's training in our own hands to warrant our professional competence also in the future. The PCG Group's future employees are qualified by ourselves – from technical laboratory to commercial vocational training. This makes us **STRONG IN COATINGS** also in the future.

OUR STRENGTH IS TO FIND SOLUTIONS

For over half a century we have developed high-quality products and supported our customers' production processes. We manufacture acc. to the certification standard DIN ISO 9001 and thus verify our high quality standard and innovative capabilities. Thanks to the AEO C safety certificate "Customs simplifications" which allows approved economic operators simplified customs clearance, the main customs office certifies that we do our international business in a safe and reliable way.



JORDAN LACKE

A PARTNER WITH OVER 125 YEARS OF EXPERIENCE AND TRADITION

**PRODUCTS AND SOLUTIONS
FOR THE CARPENTER**



JORDAN Lacke has always stood for exceptionally high product quality. Carpenters choose JORDAN coatings as with these products they can simply show what they are capable of. According to the motto - show what you can do!

JORDAN Lacke was founded as early as on September 1, 1891 by Heinrich JORDAN, a very appreciated wood expert in Würzburg (Germany). This means that they look back on over 125 years of experience and tradition.

In 2013 JORDAN Lacke became part of the PCG Group. In the year 2016 JORDAN Lacke celebrated their 125th company anniversary. Right in time for this the brand image had been completely revised.

1900: Relocation of the works - which had been transformed into a paint factory a long time ago - to the premises of „Schneiderkeller“ in Schweinfurter Strasse.



For more than 125 years JORDAN Lacke have developed products and solutions for carpentry.



1967: The premises in Schweinfurter Strasse became too restricted.

At the right time on the 75th company anniversary the totally rearranged works were inaugurated.



THE NEW PLANTAG COATINGS TECHNOLOGY CENTRE

A PLACE FOR TESTING, DEVELOPMENT AND INNOVATION



The new technology centre is not only a location for testing and development, but also a place for collaboration and innovation in surface technology. It offers ideal conditions for developing and optimizing innovative products together with customers from the furniture, flooring and panel industry and trade.

The relocation from the old to the new site took place in the last quarter of 2023 and the 1,000 m² technology centre has been in operation since the end of January. It is used by both our technical field service and our development laboratories. The proximity to the development laboratories ensures short distances and optimal communication between the departments. Customer visits are always welcome, whether for demonstrations, training or joint developments.

The equipment:

- Surface sanding machine (calibration-, longitudinal-, cross sanding belt, brush)
- Machine for industrial spray coating
- Filler and putty machine
- 3 Roller coaters
- 2 Laboratory roller coaters with distributor unit
- 2 UV dryers (gallium, mercury)
- Jet dryer
- Paint booth for manual application (high and low pressure process)
- EBM system (electron beam hardening)
- UV dryer (inert gas - nitrogen)
- LED & excimer UV dryer (inert gas - nitrogen)
- 4 Laboratory drying ovens
- Testing laboratory
- Woodworking machines

In the PCG Group's technology centre in Detmold we continuously develop the best solutions for our demanding customers.



With our machinery we can simulate our customer's production conditions and develop our customized surface systems.

OWL University of Applied Sciences and Arts



Cooperation with the OWL University

Successful coating concepts require extensive know-how about pre-treatments and material properties of the material to be coated. For this reason the PCG Group cooperates closely with the OWL University in the study programmes Wood Technology and Industrial Engineering regarding different research projects.

In exchange students are given a detailed insight into the world of coating technology through events in the PCG Group's technology centre.

AQUALINE	NEW PRODUCT DESIGNATION	OLD PRODUCT DESIGNATION	CLASSICLINE	NEW PRODUCT DESIGNATION	OLD PRODUCT DESIGNATION
	1C AQUA-MAGIC-BASE JB7163-00001	1C AQUA-MAGIC-BASE JB7163-0001		1C TEMPOFIX-MULTI-COAT JM1017	1C TEMPOFIX-SCHICHTER SG 17-X
	1C AQUA-MAGIC-FILLER JB7430	1C AQUA-FILLER AF 430		2C PUR-MULTI-COAT JM2136	2C PUR-SCHICHTER H 136X
	1C AQUA-MAGIC-COLOR JK7462	1C AQUA-MAGIC-COLOR AMC 462		2C HIGH-SOLID-CLEAR JM2400	2C HIGH-SOLID-SCHICHTER H 400X
	1C AQUA-MAGIC-CLEAR JM7475	1C AQUA-CLEAR AC 475-X		2C CLASSIC-EXTREME-RESIST JM2894	2C CLASSIC-EXTREME-RESIST CE 894-X
	1C AQUA-MAGIC-CLEAR JM7477	1C AQUA-CLEAR AC 477-X		2C GIESS-COLORLUX JM2370	2C GIESS-COLORLUX H 37X
	1C+2C AQUA-STEP JM7490-4-001	1C+2C AQUASTEP AS 490-5		2C JORA-ULTRA-MATT-RESIST JF2492-1-001	2C JORA-ULTRA-MATT-RESIST JF2492-0000
DECOLINE	2C AQUA-NATURAL-EFFECT JM8420-1-001	2C AQUA-NATUREFFEXT AN 420	STAINLINE	2C JOCOPAN-ROHHOLZEFFEKTACK JM2186-1-001	2C JOCOPAN-ROHHOLZEFFEKTACK H 1861
	1C DECO-OIL-COLOR JW1630	1C DECO-OIL-COLOR DO 630		HYDROSTAIN-MODULAR JC73X0	
	1C DECO-OIL-CLEAR JW1640-3-001	1C DECO-OIL DO 640C	NATURELINE	CLASSICSTAIN JC1731 - JC1833	CLASSICSTAIN CS 731-833
	1C+2C DECO-OIL-ECO JW1660-3-001	1C+2C DECO-OIL DO 660		JORDAN NATURE-PUR JM7200-3-001	JORDAN NATURE-PUR 200
	1C DECO-OIL-BRIGHT JW1640-30001	1C DECO-OBJECT-OIL DO 670		JORDAN NATURE FIRE-PROTECT JM7210-3-001	JORDAN NATURE FIRE-PROTECT 210
	1C DECO-OIL-NATURAL-WAX JW1680-3-001	1C DECO-NATURWACHS-OIL DO 680		JORDAN NATURE-COLOR JK7203	JORDAN NATURE-COLOR 203
CLASSICLINE	1C DECO-OIL-HARD-WAX JW1610	1C ECO-HARTWACHS-FINISH EHF 570		JORDAN NATURE-PUR PLUS PRO JZ7202-0-001	JORDAN NATURE-PUR PLUS PRO 202
	2C PUR-FILLER JB2338	2C PUR-FILLER F 1338	CARELINE	JORA-CARE-BASIC-CLEANER JZ7920-0-001	JORA-CLEAN BASIC CLEANER JCG 920
	2C ACRYPUR-BASE JM2310-0-001	2C ACRYPUR-BASE COAT H 23100		JORA-CARE-MAINTENANCE-AGENT JZ7930-0-001	JORA-CARE-MAINTENANCE-AGENT JCW 930
	2C JOCOPHEN-BASE JB2010-0-001	2C JOCOPHEN-BASE COAT H 2010		JORA-CARE-WAX-POLISH JW1940-0-001	JORA-CARE WAX POLISH JCW 940
	2C HIGH-SOLID-BASE JB2450-0-001	2C HIGH-SOLID-BASE COAT H 4500		JORA-CARE-MAINTENANCE-OIL JW1950-0-001	JORA-CARE MAINTENANCE OIL JCP 950
	1C CLASSIC-BASE-METAL JB1820	1C CLASSICBASE CBM 820		JORA-CARE-MAINTENANCE-OIL JW7955-0-001	JORA-CARE MAINTENANCE OIL JCP 955
	1C CLASSIC-BASE-GLASS JB1823-0-001	1C CLASSICBASE CB 823	ADDITIVES	JORA-CARE-PLASTIC-CLEANER JZ9960-0-001	JORA-CLEAN PLASTIC CLEANER JCK 960
	2C JORA-BRILLIANT-COLOR JK2855	2C JORA-BRILLANT-COLOR JBC 855		SPECIAL-THINNER JT1313-0-001	SPECIAL-THINNER V 1313
	2C JORA-BRILLIANT JF2875-7-001	2C JORA-BRILLANT JB 875		NITRO-THINNER JT1415-0-001	NITRO-THINNER V 1415
	2C HIGH-SOLID-COLOR JK2600	2C HIGH-SOLID-COLOR H 600X		DD-THINNER JT1244-0-001	DD-THINNER V 2244
	2C JORA-COLOR JK2150	2C JORA-COLOR JC 150		BRILLIANT-THINNER JT1083-0-001	THINNER HG V 2083
	2C COLORLUX-METALLIC JK2378	2C COLORLUX-METALLIC H 378		UNI-CLEAN JT1803-0-001	UNI-WASHING-SOLVENT V 803

ADDITIVES	NEW PRODUCT DESIGNATION	OLD PRODUCT DESIGNATION
	AQUA-CLEAN JZ9460-0-001	AQUA-CLEAN AC 460
	RETARDER JT1019-0-001	RETARDER V19
	CLASSIC-COLOR-CONCENTRATE JC1900	CLASSIC-COLOR-CONCENTRATE CCC 1000 - 1009
	CLASSIC-PRO-RING-PROTECT JA1802-0-001	CLASSIC-METALMARKING- CONCENTRATE CR 802
	CLASSIC-PRO-UV-PROTECT JA9045-0-001	LIGHT GUARD CONCENTRATE LK 45
	GLASS-HARDENER JH2135-0-001	GLAS HARDENER GH 135
	AQUA-CROSSLINKER JH8413-0-001	
	AQUA-PRO-FLOW JA7403-0-001	
	LIMED-OAK-PASTE JZ1669-0-001	LIMED-OAK PASTE P 1669
	DECO-PRO-MATT JA9620-0-001	DECOMATTPASTE DM 621
	DECO-PRO-MATT JA9620-0-002	DECOMATTPASTE DM 622
	DECO-PRO-STRUCTURE JA9600-0-001 (GROB)	DECOSTRUCTURE DS 604 (COARSE)
	DECO-PRO-STRUCTUE JA9600-0-002 (FEIN)	DECOSTRUCTURE DS 605 (FINE)
	PRO-STRUCTURE JA9048-0-001	
HARDENER	CLASSIC-HARDENER JH2132-0-001	HARDENER H 132
	JOCOPHEN-HARDENER JH2242-0-001	HARDENER H 2242

HARDENER	NEW PRODUCT DESIGNATION	OLD PRODUCT DESIGNATION
	HIGH-SOLID-HARDENER JH2023-0-001	HARDENER H 4002
	HIGH-SOLID-HARDENER JH2022-0-001	HARDENER H 6002
	BRILLIANT-HARDENER JH2870-0-001	
	PUR-HARDENER JH2136-0-001	HARDENER H 1362
	AQUA-HARDENER JH8410-0-001	AQUAHARDENER AH 410
	JOCOPAN-HARDENER JH2186-0-001	HARDENER H 1862
	DECO-OIL-HARDENER JH2613-0-001	DECO-OIL-HARDENER DH 613



ONCE UPON A TIME
NEW AND OLD
PRODUCT DESIGNATIONS
IN THE OVERVIEW

OVERVIEW NEW GLOSS-LEVELS

GLOSS-LEVEL	CLASSIFICATION	GU
1	natural effect	<5 GU 60°
2	deep matt	5-10 GU 60°
3	matt	11-20 GU 60°
4	semi-matt	21-35 GU 60°
5	semi-gloss	36-60 GU 60°
6	glossy	61-90 GU 60°
7	high gloss	>90 GU 60°

2C HIGH-SOLID-COLOR JK2600

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JK2600-5 (SEMI-GLOSS)	H 6000 MATT
JK2600-3 (MATT)	H 6007 SPECIAL MATT

2C PUR-MULTI-COAT JM2136

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM2136-5-001 (SEMI-GLOSS)	H 1363 (SEMI-MATT)
JM2136-4-001 (SEMI-MATT)	H 1365 (MATT)
JM2136-3-001 (MATT)	H 1367 (SPECIAL MATT)
JM2136-2-001 (DEEP MATT)	H 1366 (DEEP MATT)

2C GIESS-COLORLUX JM2370

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM2370-6-001 (GLOSSY)	H 371 (GLOSSY)
JM2370-5-001 (SEMI-GLOSS)	H 373 (SEMI-MATT)
JM2370-4-001 (SEMI-MATT)	H 375 (MATT)
JM2370-3-001 (MATT)	H 377 (SPECIAL MATT)
JM2370-2-001 (DEEP MATT)	H 376 (DEEP MATT)
JM2370-1-001 (NATURAL EFFECT)	H 376-S2 (SUPER MATT)

1C TEMPOFIX-MULTI-COAT JM1017

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM1017-5-001 (SEMI-GLOSS)	SG 17-3 G (SEMI-MATT)
JM1017-4-001 (SEMI-MATT)	SG 17-5 G (MATT)

2C HIGH-SOLID-CLEAR J2400

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM2400-6-001 (GLOSSY)	H 4001 (GLOSSY)
JM2400-3-001 (MATT)	H 4005 (MATT)
JM2400-2-001 (DEEP MATT)	H 4007 (SPECIAL MATT)

1C AQUA-MAGIC-CLEAR JM7475/JM7477

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM7475-4-001 (SEMI-MATT)	AC 475-30 (SEMI-MATT)
JM7477-4-001 (SEMI-MATT)	AC 477-30 (SEMI-MATT)
JM7475-3-001 (MATT)	AC 475-20 (MATT)
JM7477-3-001 (MATT)	AC 477-20 (MATT)
JM7475-2-001 (DEEP MATT)	AC 475-10 (DEEP MATT)
JM7477-2-001 (DEEP MATT)	AC 477-10 (DEEP MATT)

2C CLASSIC-EXTREME-RESIST JM2894

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JM2894-2-001 (DEEP MATT)	MATT (CE 894-5)
JM2894-1-001 (NATURAL EFFECT)	DEEP MATT (CE 894-6)


1C DECO-OIL-HARD-WAX JW1610

NEW GLOSS-LEVELS	OLD GLOSS-LEVELS
JW1610-5-001 (SEMI-GLOSS)	MATT (EHF 570)
JW1610-3-001 (MATT)	NEW



FROM OLD TO NEW
NEW AND OLD GLOSS-LEVELS
AT A GLANCE

For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, stains and oils.



CHANGES START SMALL


Did you know that we deployed our first all-electric company vehicle back in 2012?

PCG – Beyond the surface



SURFACES WITH STYLE

LACQUERS AND OILS FOR FURNITURE



18 – 35

1C AQUA-MAGIC-BASE JB7163-00001
 1C AQUA-MAGIC-FILLER JB7430
 1C AQUA-MAGIC-COLOR JK7462
 1C AQUA-MAGIC-CLEAR JM7475
 1C AQUA-MAGIC-CLEAR JM7477
 1C+2C AQUA-STEP JM7490-4-001
 2C AQUA-NATURAL-EFFECT JM8420-1-001

2C PUR-FILLER JB2338
 2C ACRYPUR-BASE JM2310-0-001
 2C JOCOPHEN-BASE JB2010-0-001
 2C HIGH-SOLID-BASE JB2450-0-001
 1C CLASSIC-BASE-METAL JB1820
 1C CLASSIC-BASE-GLASS JB1823-0-001
 2C JORA-BRILLIANT-COLOR JK2855
 2C HIGH-SOLID-COLOR JK2600
 2C JORA-COLOR JK2150
 2C COLORLUX-METALLIC JK2378
 1C TEMPOFIX-MULTI-COAT JM1017
 2C PUR-MULTI-COAT JM2136
 2C HIGH-SOLID-CLEAR JM2400
 2C CLASSIC-EXTREME-RESIST JM2894
 2C GIESS-COLORLUX JM2370
 2C JORA-ULTRA-MATT-RESIST JF2492-1-001
 2C JORA-BRILLIANT JF2875-7-001
 2C JOCOPAN-ROHHOLZEFFEKT LACK JM2186-1-001

1C DECO-OIL-COLOR JW1630
 1C DECO-OIL-CLEAR JW1640-3-001
 1C+2C DECO-OIL-ECO JW1660-3-001
 1C DECO-OIL-BRIGHT JW1640-30001
 1C DECO-OIL-NATURAL-WAX JW1680-3-001
 1C DECO-OIL-HARD-WAX JW1610

HYDROSTAIN-MODULAR JC73X0
 CLASSICSTAIN JC1731 - JC1833



1C AQUA-MAGIC-BASE JB7163-00001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES

7 and 15 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430 1C AQUA-FILLER AF 430*

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-00001 (white)

JB7430-09001 (black)

DELIVERY BATCHES

7 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-COLOR JK7462

1C AQUA-MAGIC-COLOR AMC 462*

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-CLEAR JM7475)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Hinweis: Rezepturen im Colormix abrufbar



1C AQUA-MAGIC-CLEAR JM7475

1C AQUA-CLEAR AC 475-X*

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2-001 (deep matt)
JM7475-3-001 (matt)
JM7475-4-001 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-CLEAR JM7477

1C AQUA-CLEAR AC 477-X*

**Water-based 1-component clear lacquer
for coating off porous woods**

GLOSS LEVEL

JM7477-2-001 (deep matt)

JM7477-3-001 (matt)

JM7477-4-001 (semi-matt)

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + modified variant of JM7475 especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUA-STEP JM7490-4-001

1C+2C AQUASTEP AS490-5*

**Transparent, water-based stair lacquer
can be used as 1C and 2C lacquer**

GLOSS LEVEL

semi-matt

MIXING RATIO

10:1 by volume with

AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C AQUA-NATURAL-EFFECT JM8420-1-001

2C AQUA-NATUREFFEKT AN 420*

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL
natural effect

MIXING RATIO
10:1 by volume with
AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES
5 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C PUR-FILLER JB2338

2C PUR-FILLER F 1338*

Solvent-based, 2-component universal filler

PUR-FILLER JB2338-00001 (white)
PUR-FILLER JB2338-09001 (black)

MIXING RATIO
10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES
5, 15 and 25 kg

ADDITIONALS
Thinner: JT1244-0-001 | JT1313-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with JORA-COLOR JK2150 and GIESS-COLORLUX JM2370)
- + EN ISO 2409-GT 0 adhesive strength

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C ACRYPUR-BASE JM2310-0-001

2C ACRYPUR-BASE COAT H 23100*

Solvent-based, transparent 2-component primer on a polyurethane base

MIXING RATIO

10:1 by volume with CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

10 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + easy handling
- + very good filling power
- + excellent sanding

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JOCOPHEN-BASE JB2010-0-001

2C JOCOPHEN-BASE COAT H 2010*

Solvent-based 2-component primer as well as a sealing primer for ingredient-rich woods

MIXING RATIO

2:1 by volume with hardener

JOCOPHEN-HARDENER JH2242-0-001

DELIVERY BATCHES

5 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + Due to very good sealing properties against wood ingredients, the material is excellently suited for coating exotic woods

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C HIGH-SOLID-BASE JB2450-0-001

2C HIGH-SOLID-BASE COAT H 4500*

Solvent-based 2-component polyurethane system with high solids content

MIXING RATIO

2:1 by volume with

HIGH-SOLID-HARDENER JH2023-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + high filling power
- + very good sanding
- + used as base coat for buffable high gloss coatings
- + very good accentuation of the grain

STANDARDS AND TESTS

- + DIN 4102-B1 low flammability
(in combination with JORA-BRILLIANT JF2875)

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C CLASSIC-BASE-METAL JB1820

1C CLASSICBASE CBM 820*

Solvent-based adhesive primer for metal

CLASSIC-BASE-METAL JB1820-0-001 (transparent)

CLASSIC-BASE-METAL JB1820-07001 (grey)

DELIVERY BATCHES

0,9 and 4,5 kg

ADDITIONALS

Thinner: JT1244-0-001

Cleaning: JT1415-0-001 | JT1244-0-001

PRODUCT PROPERTIES

- + excellent adhesion properties on most metal substrates (such as iron, steel, aluminium, copper, etc.)

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C CLASSIC-BASE-GLASS JB1823-0-001

1C CLASSICBASE CB 823*

Solvent-based adhesive primer for glass

DELIVERY BATCHES

1 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + high mechanical bonding with the glass surface
- + low application quantity ensures economical use

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLIANT-COLOR JK2855

2C JORA-BRILLIANT-COLOR JBC 855*

Solvent-based 2-component high-gloss lacquer with brilliant colours

GLOSS LEVEL
high gloss

MIXING RATIO
2:1 by volume with
BRILLIANT-HARDENER JH2870-0-001

DELIVERY BATCHES
1, 5 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: JT1083-0-001
Cleaning: JT1244-0-001 | JT1803-0-001 | JT1083-0-001

PRODUCT PROPERTIES

- + coloured, brilliant high-gloss coating
- + excellent chemical and mechanical resistance
- + can be buffed and polished after overnight drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-COLOR JK2600

2C HIGH-SOLID-COLOR H 600X*

Solvent-based 2-component coloured lacquer system with high filling power

GLOSS LEVEL
JK2600-5 semi-glossy (old: H 6000 matt)
JK2600-3 matt (old: H 6007 special matt)

MIXING RATIO
2:1 by volume with
HIGH-SOLID-HARDENER JH2022-0-001

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



2C JORA-COLOR JK2150

2C JORA-COLOR JC 150*

Solvent-based, matt 2-component PUR acrylate coloured lacquer free of aromatic substances

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + good sanding marks coverage
- + easy handling
- + lightfast
- + free of aromatic substances
- + excellent levelling properties
- + very good adhesion on difficult surfaces
- + good chemical and mechanical resistance
- + suitable for children's toys

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
(in combination with PUR-FILLER JB2338-09001
and Classic-Hardener JH2132-0-001)
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in Colormix



2C COLORLUX-METALLIC JK2378

2C COLORLUX-METALLIC H 378*

Solvent-based 2-component lacquer with a decorative metal effect

MIXING RATIO
10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available as special adjustments

ADDITIONALS
Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Metallic shades for furniture surfaces can be self-mixed with JORA-COLOR JK2150



1C TEMPOFIX-MULTI-COAT JM1017

1C TEMPOFIX-SCHICHTER SG 17-X*

Solvent-based 1-component NC multi-layer coating, usable as primer and top coat

GLOSS LEVEL

JM1017-5-001 semi-glossy (old: SG 17-3G semi-matt)
JM1017-4-001 semi-matt (old: SG 17-5G matt)

DELIVERY BATCHES

5 and 30 litre

ADDITIONALS

Thinner: JT1415-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + high filling capacity
- + fast drying
- + very good sandability
- + easy processing in spraying and curtain coating applications
- + beautiful surface with smooth touch

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C PUR-MULTI-COAT JM2136

2C PUR-SCHICHTER H 136X*

Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat

GLOSS LEVEL

JM2136-5-001 semi-glossy (old: H 1363 semi-matt),
JM2136-4-001 semi-matt (old: H 1365 matt)
JM2136-3-001 matt (old: H 1367 special matt),
JM2136-2-001 deep-matt (old: H 1366 deep matt),

MIXING RATIO

10:1 by volume with PUR-HARDENER JH2136-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + suitable as primer and top coat
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C HIGH-SOLID-CLEAR JM2400

2C HIGH-SOLID-SCHICHTER H 400X*

Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat

GLOSS LEVEL

JM2400-6-001 glossy (old: H 4001 glossy)

JM2400-3-001 matt (old: H 4005 matt),

JM2400-2-001 deep matt (old: H 4007 special matt)

MIXING RATIO

2:1 by volume with

HIGH-SOLID-HARDENER JH203-0-001

DELIVERY BATCHES

10 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + fast drying
- + excellent filling power
- + excellent sandability
- + creates a closed porous structure within one day
- + high-gloss finishes can be achieved with JM2400-6-001 (glossy)

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C CLASSIC-EXTREME-RESIST JM2894

2C CLASSIC-EXTREME-RESIST CE 894-X*

Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses

GLOSS LEVEL

JM2894-2-001 deep-matt (old: CE 894-5 matt)

JM2894-1-001 natural effect (old: CE 894-6 deep matt)

MIXING RATIO

10:1 by volume with

CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE JB2450-0-001
- + suitable for coating surfaces primed with JOCOPHEN-BASE JB2010-0-001
- + suitable for coating surfaces that have been coated with JORA-COLOR JK2150
- + fast drying
- + easy handling

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C GIESS-COLORLUX JM2370

2C GIESS-COLORLUX H 37X*

Solvent-based 2-component clear lacquer with excellent transparency and high light fastness

GLOSS LEVEL

JM2370-6-001 glossy (old: H 371 glossy),
JM2370-5-001 semi-glossy (old: H 373 semi-matt),
JM2370-4-001 semi-matt (old: H 375 matt),
JM2370-3-001 matt (old: H 377 special-matt),
JM2370-2-001 deep-matt (old: H 376 deep-matt)
JM2370-1-001 natural effect (old: H 376-S2 super-matt)

MIXING RATIO

10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre (JM2370-6-001 only in 10 litre batches)

ADDITIONALS

Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 - 3 days)
- + recommended for application as a top coat for JORA-COLOR JK2150


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JORA-ULTRA-MATT-RESIST JF2492-1-001

2C JORA-ULTRA-MATT-RESIST JF2492-0000*

Solvent-based, ultra-matt 2-component clear lacquer / top coat with very good gloss stability

GLOSS LEVEL

natural effect

MIXING RATIO

100:15 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX JM2370-3-001 and JM2370-2-001
- + for light coloured surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLIANT JF2875-7-001

2C JORA-BRILLIANT JB 875*

PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

Solvent-based 2-component high-gloss lacquer with brilliant transparency

GLOSS LEVEL

high gloss

MIXING RATIO

2:1 by volume with

BRILLIANT-HARDENER JH2870-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1083-0-001

Cleaning: JT1083-0-001 | JT1244-0-001 |

JT1803-0-001

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JOCOPAN-ROHHOLZEFFEKTLACK

JM2186-1-001

2C JOCOPAN-ROHHOLZEFFEKTLACK H 1861*

PRODUCT PROPERTIES

- + light inherent colour
- + dries up with a natural effect
- + achieves a smooth to touch surface with high resistance properties

Solvent-based 2-component special lacquer with natural effect

GLOSS LEVEL

natural effect

MIXING RATIO

2:1 by volume with

JOCOPAN-HARDENER JH2186-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1244-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-COLOR JW1630

1C DECO-OIL-COLOR DO 630*

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 and 5 Liter

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL-CLEAR JW1640-3-001

1C DECO-OIL DO 640C*

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL-ECO JW1660-3-001

1C+2C DECO-OIL DO 660*

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
Deco-Oil-Hardener JH2613-0-001

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10+
- + DGNB criteria for quality level 4
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OIL-BRIGHT JW1640-30001

1C DECO-OBJECT-OIL DO 670*

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-NATURAL-WAX JW1680-3-001

1C DECO-NATURWACHS-OIL DO 680*

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-HARD-WAX JW1610

1C ECO-HARTWACHS-FINISH EHF 570*

1-component wax oil for surface treatment of parquet floors and stair components in living areas

GLOSS LEVEL
JW1610-5-001 (semi-gloss)
JW1610-3-001 (matt)

DELIVERY BATCHES
1 and 3 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



HYDROSTAIN-MODULAR JC73X0

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320 (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330 (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340 (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in Colormix



CLASSICSTAIN JC1731 - JC1833

CLASSICSTAIN CS 731-833*

Solvent-based stain for spraying and wiping

DELIVERY BATCHES

Basic shades 1, 3 and 10 litre

Card shades 1, 3 and 10 litre

Special shades 1, 3, 10 and 25 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + all shades can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener JC1927-0-001
- + can be used as a fast drying spraying stain with the brightener JC1928-0-001

AVAILABLE AS

- + CLASSICSTAIN JC1731 in 6 basic shades
- + CLASSICSTAIN JC1732 in 12 card shades
- + CLASSICSTAIN JC1733 for all special shades
- + CLASSICSTAIN JC1832 in 9 card shades
- + CLASSICSTAIN JC1833 for all special shades
- + available as starter set

SCOPE OF APPLICATION



TYPE OF APPLICATION



Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.




2C PUR-FILLER JB2338
2C ACRYPUR-BASE JM2310-0-001
2C JOCOPHEN-BASE JB2010-0-001
2C HIGH-SOLID-COLOR JK2600
2C COLORLUX-METALLIC JK2378
2C PUR-MULTI-COAT JM2136
2C GIESS-COLORLUX JM2370
2C CLASSIC-EXTREME-RESIST JM2894
2C JORA-ULTRA-MATT-RESIST JF2492-1-001
2C JORA-BRILLIANT JF2875-7-001

36 – 45

1C DECO-OIL-CLEAR JW1640-3-001
1C+2C DECO-OIL-ECO JW1660-3-001
1C DECO-OIL-BRIGHT JW1640-30001
1C DECO-OIL-NATURAL-WAX JW1680-3-001

CLASSICSTAIN JC1731 - JC1833

* To make it easier for you to switch to the new article descriptions, we have listed the old product names and article numbers in the 2nd line.

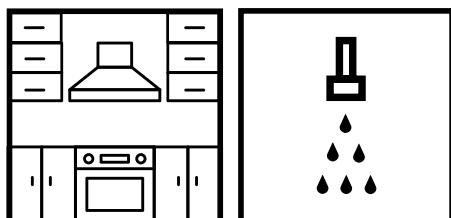

**NO PROBLEM
WITH HUMIDITY**
SURFACES FOR KITCHEN AND BATHROOM



2C PUR-FILLER JB2338

2C PUR-FILLER F 1338*

Solvent-based, 2-component universal filler

PUR-FILLER JB2338-00001 (white)

PUR-FILLER JB2338-09001 (black)

MIXING RATIO

10:1 by volume with

CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5, 15 and 25 kg

ADDITIONALS

Thinner: JT1244-0-001 | JT1313-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with JORA-COLOR JK2150 and GIESS-COLORLUX JM2370)
- + EN ISO 2409-GT 0 adhesive strength

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C ACRYPUR-BASE JM2310-0-001

2C ACRYPUR-BASE COAT H 23100*

Solvent-based, transparent 2-component primer on a polyurethane base

MIXING RATIO

10:1 by volume with CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

10 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + easy handling
- + very good filling power
- + excellent sanding

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JOCOPHEN-BASE JB2010-0-001

2C JOCOPHEN-BASE COAT H 2010*

Solvent-based 2-component primer as well as a sealing primer for ingredient-rich woods

MIXING RATIO

2:1 by volume with hardener

JOCOPHEN-HARDENER JH2242-0-001

DELIVERY BATCHES

5 litre

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + Due to very good sealing properties against wood ingredients, the material is excellently suited for coating exotic woods

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-COLOR JK2600

2C HIGH-SOLID-COLOR H 600X*

Solvent-based 2-component coloured lacquer system with high filling power

GLOSS LEVEL

JK2600-5 semi-glossy (old: H 6000 matt)

JK2600-3 matt (old: H 6007 special matt)

MIXING RATIO

2:1 by volume with

HIGH-SOLID-HARDENER JH2022-0-001

DELIVERY BATCHES

1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS

Thinner: JT1244-0-001

Retarder: JT1019-0-001

Cleaning: JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



2C COLORLUX-METALLIC JK2378

2C COLORLUX-METALLIC H 378*

**Solvent-based 2-component lacquer
with a decorative metal effect**

MIXING RATIO
10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available as special adjustments

ADDITIONALS
Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Metallic shades for furniture surfaces can be self-mixed
with JORA-COLOR JK2150



2C PUR-MULTI-COAT JM2136

2C PUR-SCHICHTER H 136X*

**Solvent-based 2-component clear lacquer on a
polyurethane base, usable as primer and topcoat**

GLOSS LEVEL
JM2136-5-001 semi-glossy (old: H 1363 semi-matt),
JM2136-4-001 semi-matt (old: H 1365 matt)
JM2136-3-001 matt (old: H 1367 special matt),
JM2136-2-001 deep-matt (old: H 1366 deep matt),

MIXING RATIO
10:1 by volume with PUR-HARDENER JH2136-0-001

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + suitable as primer and top coat
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C GIESS-COLORLUX JM2370

2C GIESS-COLORLUX H 37X*

Solvent-based 2-component clear lacquer with excellent transparency and high light fastness

GLOSS LEVEL

JM2370-6-001 glossy (old: H 371 glossy),
JM2370-5-001 semi-glossy (old: H 373 semi-matt),
JM2370-4-001 semi-matt (old: H 375 matt),
JM2370-3-001 matt (old: H 377 special-matt),
JM2370-2-001 deep-matt (old: H 376 deep-matt)
JM2370-1-001 natural effect (old: H 376-S2 super-matt)

MIXING RATIO

10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre (JM2370-6-001 only in 10 litre batches)

ADDITIONALS

Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 - 3 days)
- + recommended for application as a top coat for JORA-COLOR JK2150


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C CLASSIC-EXTREME-RESIST JM2894

2C CLASSIC-EXTREME-RESIST CE 894-X*

Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses

GLOSS LEVEL

JM2894-2-001 deep-matt (old: CE 894-5 matt)
JM2894-1-001 natural effect (old: CE 894-6 deep matt)

MIXING RATIO

10:1 by volume with
CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1244-0-001
Retarder: JT1019-0-001
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE JB2450-0-001
- + suitable for coating surfaces primed with JOCOPHEN-BASE JB2010-0-001
- + suitable for coating surfaces that have been coated with JORA-COLOR JK2150
- + fast drying
- + easy handling

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLIANT JF2875-7-001

2C JORA-BRILLIANT JB 875*

PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

Solvent-based 2-component high-gloss lacquer with brilliant transparency

GLOSS LEVEL

high gloss

MIXING RATIO

2:1 by volume with

BRILLIANT-HARDENER JH2870-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: JT1083-0-001

Cleaning: JT1083-0-001 | JT1244-0-001 |

JT1803-0-001

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JORA-ULTRA-MATT-RESIST

JF2492-1-001

2C JORA-ULTRA-MATT-RESIST JF2492-0000*

PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX JM2370-3-001 and JM2370-2-001
- + for light coloured surfaces

Solvent-based, ultra-matt 2-component clear lacquer / top coat with very good gloss stability

GLOSS LEVEL

natural effect

MIXING RATIO

100:15 by volume with

CLASSIC-HARDENER JH2132-0-001

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-CLEAR JW1640-3-001

1C DECO-OIL DO 640C*

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

KITCHEN
& BATH



1C+2C DECO-OIL-ECO JW1660-3-001

1C+2C DECO-OIL DO 660*

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
Deco-Oil-Hardener JH2613-0-001

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10+
- + DGNB criteria for quality level 4
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

A 2-component application is recommended for parquet and stairs.

VOC-FREE



1C DECO-OIL-BRIGHT JW1640-30001

1C DECO-OBJECT-OIL DO 670*

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-NATURAL-WAX JW1680-3-001

1C DECO-NATURWACHS-OIL DO 680*

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



CLASSICSTAIN JC1731 - JC1833

CLASSICSTAIN CS 731-833*

Solvent-based stain for spraying and wiping

DELIVERY BATCHES

Basic shades 1, 3 and 10 litre

Card shades 1, 3 and 10 litre

Special shades 1, 3, 10 and 25 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001

PRODUCT PROPERTIES

- + all shades can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener JC1927-0-001
- + can be used as a fast drying spraying stain with the brightener JC1928-0-001

AVAILABLE AS

- + CLASSICSTAIN JC1731 in 6 basic shades
- + CLASSICSTAIN JC1732 in 12 card shades
- + CLASSICSTAIN JC1733 for all special shades
- + CLASSICSTAIN JC1832 in 9 card shades
- + CLASSICSTAIN JC1833 for all special shades
- + available as starter set

SCOPE OF APPLICATION



TYPE OF APPLICATION





To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

CHANGES START SMALL

Did you know that we have been generating electricity with our own photovoltaic system since 2010?

PCG – Beyond the surface

STEP BY STEP



PRODUCTS FOR PARQUET AND STAIRS

1C AQUA-MAGIC-BASE JB7163-00001
1C+2C AQUA-STEP JM7490-4-001

46 – 53

1C DECO-OIL-HARD-WAX JW1610
1C DECO-OIL-COLOR JW1630
1C DECO-OIL-CLEAR JW1640-3-001
1C+2C DECO-OIL-ECO JW1660-3-001
1C DECO-OIL-BRIGHT JW1640-30001
1C DECO-OIL-NATURAL-WAX JW1680-3-001

HYDROSTAIN-MODULAR JC73X0





1C AQUA-MAGIC-BASE JB7163-00001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES

7 and 15 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUA-STEP JM7490-4-001 1C+2C AQUASTEP AS490-5*

Transparent, water-based stair lacquer can be used as 1C and 2C lacquer

GLOSS LEVEL

semi-matt

MIXING RATIO

10:1 by volume with

AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-HARD-WAX JW1610

1C ECO-HARTWACHS-FINISH EHF 570*

1-component wax oil for surface treatment of parquet floors and stair components in living areas

GLOSS LEVEL

JW1610-5-001 (semi-gloss)

JW1610-3-001 (matt)

DELIVERY BATCHES

1 and 3 litre

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-COLOR JW1630

1C DECO-OIL-COLOR DO 630*

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL

matt

DELIVERY BATCHES

0,25, 1 and 5 Liter

ADDITIONALS

Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-CLEAR JW1640-3-001

1C DECO-OIL DO 640C*

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL-ECO JW1660-3-001

1C+2C DECO-OIL DO 660*

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
Deco-Oil-Hardener JH2613-0-001

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10+
- + DGNB criteria for quality level 4
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

A 2-component application is recommended for parquet and stairs.



1C DECO-OIL-BRIGHT JW1640-30001

1C DECO-OBJECT-OIL DO 670*

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-NATURAL-WAX JW1680-3-001

1C DECO-NATURWACHS-OIL DO 680*

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



HYDROSTAIN-MODULAR JC73X0

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320 (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330 (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340 (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in Colormix



INTERIOR DESIGN MEETS HANDCRAFTED CARPENTRY

SHOWROOM FOR KITCHEN AND BATHROOM



Wohnkultur Müller: Masterful furnishings, exclusive interior design and handcrafted carpentry

In the centre of Schweinfurt you will find the furniture store Wohnkultur Müller. A place where aesthetics meets functionality and every detail has been created with love. With decades of experience in interior design, the company has made a name for itself beyond the region, standing for the highest quality and timeless elegance.

The origins of the company originate in the carpentry trade. For over 30 years, furniture and interior fittings of the highest quality and perfection have been produced in the in-house carpentry manufactory 'Kröner Schreinerei'. With this background of experience, expertise and professional competence, there is a very special focus on furniture, its materials and manufacture. The special thing about the work is the combination of interior design and the roots: the carpentry trade. They not only design furnishings, but also manufacture them with passion and dedication. These customised products are supplemented by furniture from well-known manufacturers from the furniture store. At Wohnkultur Müller it is not just about the furniture - it's about designing living spaces.

For many years, JORDAN Lacke has been supplying the appropriate surface materials such as lacquers, oils and stains that are required for perfect surfaces. Depending on the project, the appropriate materials are selected in consultation with the technical consultant in order to achieve the best possible requirements for the gloss level and the resistance of the surface, for example.

"We chose JORDAN Lacke as our supplier many years ago, because they not only offer comprehensive technical product advice, but they can also provide precisely matched colours for our furniture extensions and additions without any problems and deliver them quickly. This also gives us access to a wide range of products, from water-based paints and metallic colours to stains and parquet sealers, so that we can offer the entire spectrum of products to our end customers. No matter what surface materials are required, we can find the right solution at JORDAN Lacke."

– Norbert Müller (Owner)

Processed by:
Wohnkultur Müller, Schweinfurt
www.wohnkultur-mueller.de



SIMPLY INVITING

SURFACE DIVERSITY FOR DOORS


Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

1C AQUA-MAGIC-BASE JB7163-00001
1C AQUA-MAGIC-FILLER JB7430
1C AQUA-MAGIC-COLOR JK7462
1C AQUA-MAGIC-CLEAR JM7475
1C AQUA-MAGIC-CLEAR JM7477
1C+2C AQUA-STEP JM7490-4-001
2C AQUA-NATURAL-EFFECT JM8420-1-001

1C DECO-OIL-COLOR JW1630
1C DECO-OIL-CLEAR JW1640-3-001
1C+2C DECO-OIL-ECO JW1660-3-001
1C DECO-OIL-BRIGHT JW1640-30001
1C DECO-OIL-NATURAL-WAX JW1680-3-001

HYDROSTAIN-MODULAR JC73X0

54 – 63



* To make it easier for you to switch to the new article descriptions, we have listed the old product names and article numbers in the 2nd line.



1C AQUA-MAGIC-BASE JB7163-00001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES

7 and 15 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430 1C AQUA-FILLER AF 430*

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-00001 (white)

JB7430-09001 (black)

DELIVERY BATCHES

7 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-COLOR JK7462

1C AQUA-MAGIC-COLOR AMC 462*

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-CLEAR JM7475)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Hinweis: Rezepturen im Colormix abrufbar



1C AQUA-MAGIC-CLEAR JM7475

1C AQUA-CLEAR AC 475-X*

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2-001 (deep matt)
JM7475-3-001 (matt)
JM7475-4-001 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-CLEAR JM7477

1C AQUA-CLEAR AC 477-X*

**Water-based 1-component clear lacquer
for coating off porous woods**

GLOSS LEVEL

JM7477-2-001 (deep matt)

JM7477-3-001 (matt)

JM7477-4-001 (semi-matt)

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + modified variant of JM7475 especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUA-STEP JM7490-4-001

1C+2C AQUASTEP AS490-5*

**Transparent, water-based stair lacquer
can be used as 1C and 2C lacquer**

GLOSS LEVEL

semi-matt

MIXING RATIO

10:1 by volume with

AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C AQUA-NATURAL-EFFECT JM8420-1-001

2C AQUA-NATUREFFEKT AN 420*

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL
natural effect

MIXING RATIO
10:1 by volume with
AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES
5 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL-COLOR JW1630

1C DECO-OIL-COLOR DO 630*

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 and 5 Liter

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-CLEAR JW1640-3-001

1C DECO-OIL DO 640C*

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL-ECO JW1660-3-001

1C+2C DECO-OIL DO 660*

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
Deco-Oil-Hardener JH2613-0-001

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10+
- + DGNB criteria for quality level 4
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

A 2-component application is recommended for parquet and stairs.



DOORS



61



HYDROSTAIN-MODULAR JC73X0

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320 (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330 (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340 (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in Colormix


GUITAR DISPLAY




KINDERGARTEN IN FRAUENFELD



MAISONETTE APARTMENT

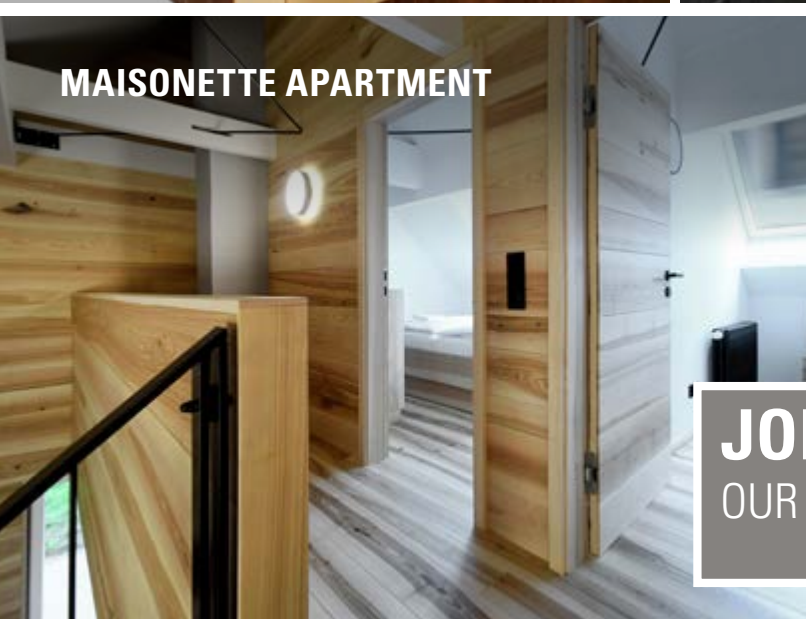

**PARQUET FLOORING IN THE
OMEGA MUSEUM IN BIEL**

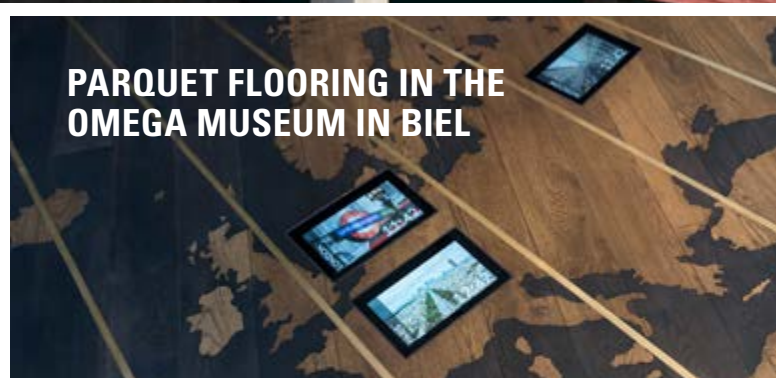

JORDAN LACKE IN ACTION

OUR REFERENCES

**RESTAURANT MUS BAR
& VIEW IN POSEN**



**COUNCIL CHAMBER OF THE ECB
IN FRANKFURT**




PIZZERIA FORNI ROSSI IN POSEN



LOG HOUSE IN THE DISTRICT OF GÜNZBURG

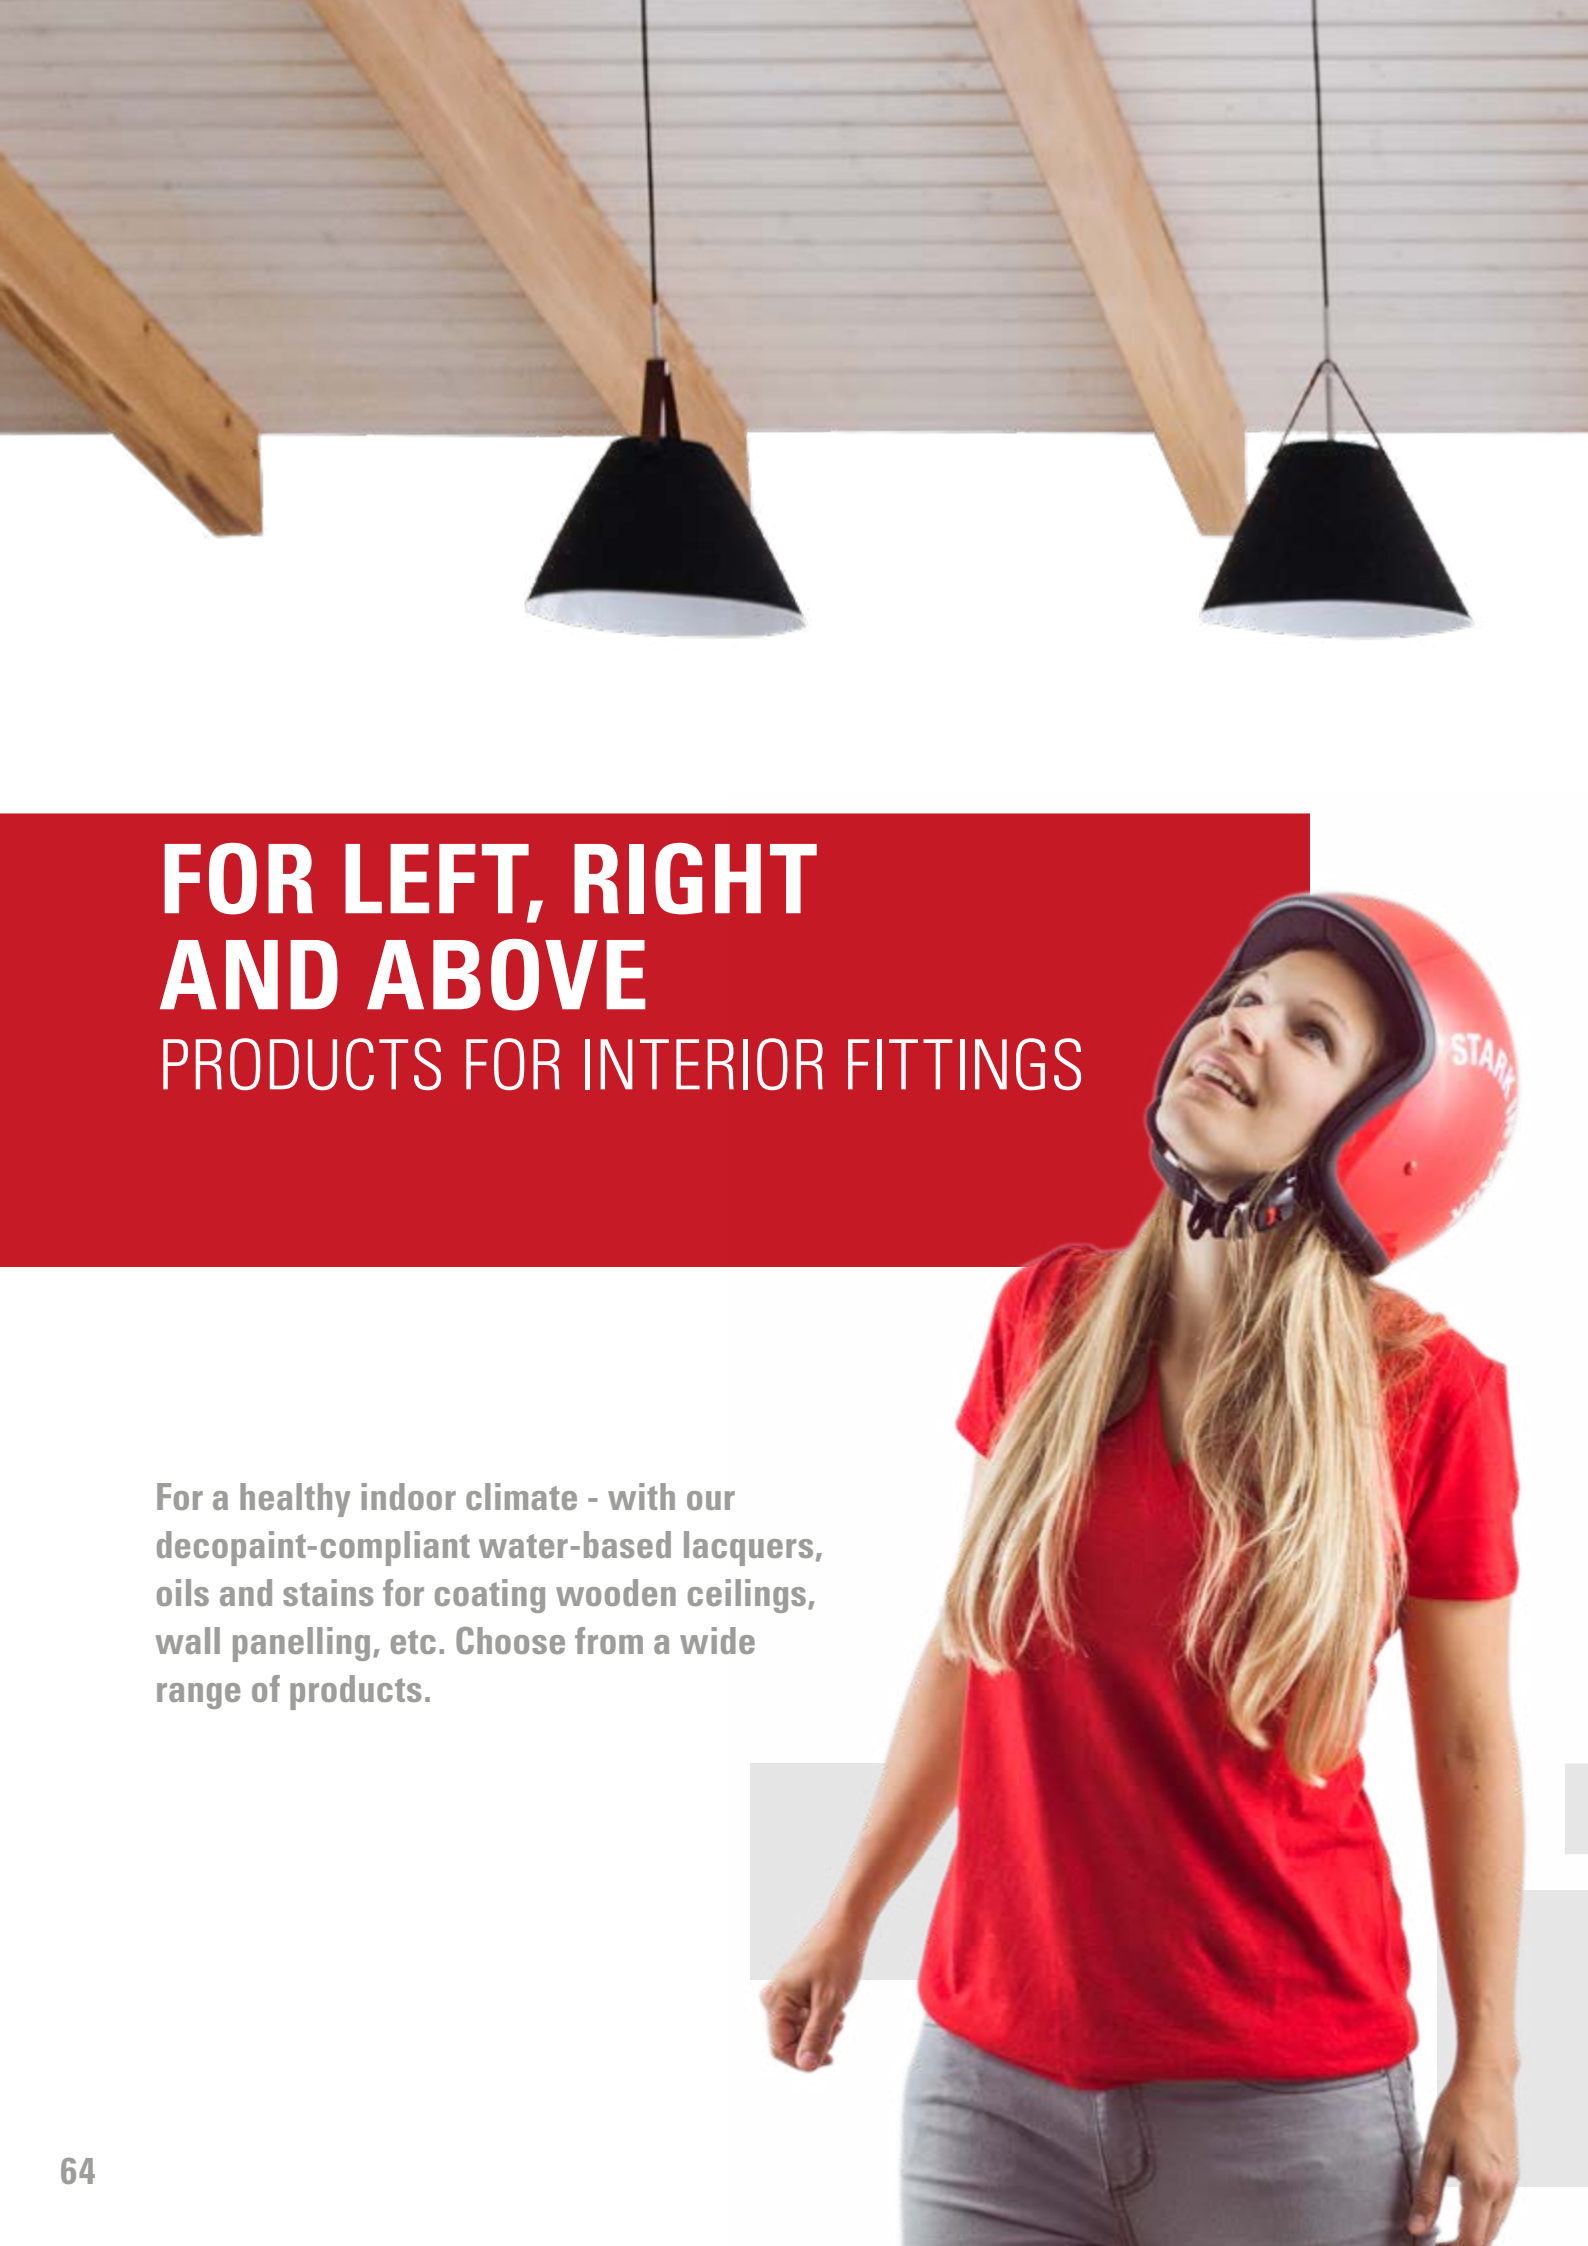


A woman with long blonde hair, wearing a red t-shirt and a red helmet with 'STARK' written on it, is looking up at two black, cone-shaped pendant lights hanging from a wooden ceiling with exposed beams. The scene is brightly lit, and the woman has a slight smile.

FOR LEFT, RIGHT AND ABOVE

PRODUCTS FOR INTERIOR FITTINGS

For a healthy indoor climate - with our decopaint-compliant water-based lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.



1C AQUA-MAGIC-BASE JB7163-00001
1C AQUA-MAGIC-FILLER JB7430
1C AQUA-MAGIC-COLOR JK7462
1C AQUA-MAGIC-CLEAR JM7475
1C AQUA-MAGIC-CLEAR JM7477
1C+2C AQUA-STEP JM7490-4-001
2C AQUA-NATURAL-EFFECT JM8420-1-001

64 – 73

1C DECO-OIL-COLOR JW1630
1C DECO-OIL-CLEAR JW1640-3-001
1C+2C DECO-OIL-ECO JW1660-3-001
1C DECO-OIL-BRIGHT JW1640-30001
1C DECO-OIL-NATURAL-WAX JW1680-3-001

HYDROSTAIN-MODULAR JC73X0

* To make it easier for you to switch to the new article descriptions, we have listed the old product names and article numbers in the 2nd line.



1C AQUA-MAGIC-BASE JB7163-00001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES

7 and 15 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430 1C AQUA-FILLER AF 430*

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-00001 (white)

JB7430-09001 (black)

DELIVERY BATCHES

7 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001

PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-COLOR JK7462

1C AQUA-MAGIC-COLOR AMC 462*

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-CLEAR JM7475)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Hinweis: Rezepturen im Colormix abrufbar



1C AQUA-MAGIC-CLEAR JM7475

1C AQUA-CLEAR AC 475-X*

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2-001 (deep matt)
JM7475-3-001 (matt)
JM7475-4-001 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-CLEAR JM7477

1C AQUA-CLEAR AC 477-X*

**Water-based 1-component clear lacquer
for coating off porous woods**

GLOSS LEVEL

JM7477-2-001 (deep matt)

JM7477-3-001 (matt)

JM7477-4-001 (semi-matt)

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + modified variant of JM7475 especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUA-STEP JM7490-4-001

1C+2C AQUASTEP AS490-5*

**Transparent, water-based stair lacquer
can be used as 1C and 2C lacquer**

GLOSS LEVEL

semi-matt

MIXING RATIO

10:1 by volume with

AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water

Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C AQUA-NATURAL-EFFECT JM8420-1-001

2C AQUA-NATUREFFEKT AN 420*

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL
natural effect

MIXING RATIO
10:1 by volume with
AQUA-HARDENER JH8410-0-001

DELIVERY BATCHES
5 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | JZ9460-0-001


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + DGNB criteria for quality level 4
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL-COLOR JW1630

1C DECO-OIL-COLOR DO 630*

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 and 5 Liter

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 |
JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-CLEAR JW1640-3-001

1C DECO-OIL DO 640C*

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + Slip-resistance class R10
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL-ECO JW1660-3-001

1C+2C DECO-OIL DO 660*

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with
Deco-Oil-Hardener JH2613-0-001

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10+
- + DGNB criteria for quality level 4
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OIL-BRIGHT JW1640-30001

1C DECO-OBJECT-OIL DO 670*

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-OIL-NATURAL-WAX JW1680-3-001

1C DECO-NATURWACHS-OIL DO 680*

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Cleaning: JT1415-0-001 | JT1244-0-001 | JT1803-0-001


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



HYDROSTAIN-MODULAR JC73X0

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320 (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330 (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340 (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION




TYPE OF APPLICATION



Note: Recipes available in Colormix

JORDAN NATURELINE

THE GREEN PROTECTION FOR WOOD AND ENVIRONMENT

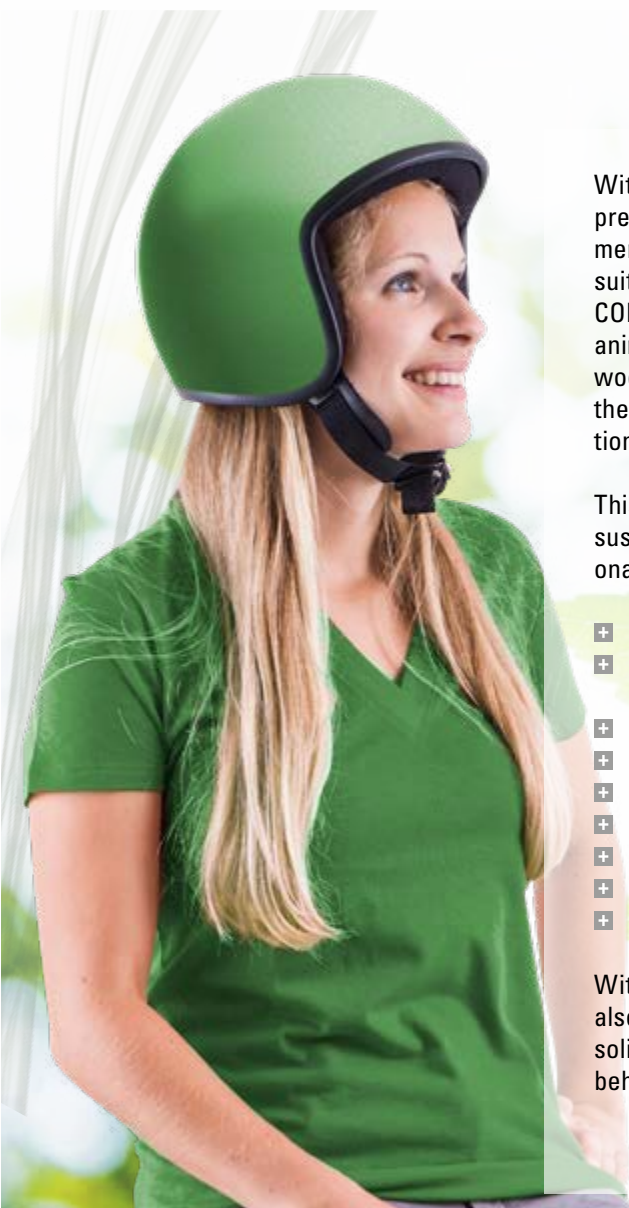

With the JORDAN Natureline, JORDAN Lacke is bringing a highly sustainable wood preservative to the market that not only protects your wood, but also the environment. The ready-to-use coloured and colourless mineral wood preservative is ideally suited for indoor and outdoor use. JORDAN NATURE-PUR and JORDAN NATURE-COLOR not only provide effective protection against fungi (according to EN 113) and animal pests without biocides, but also improve the flame-retardant properties of the wood substrate. Due to the particularly low-emission formulation, on a mineral basis, the products of the JORDAN Natureline meet the strict requirements for the certification of the eco-INSTITUT label.

This is a recognised quality label that confirms the product's pollution prevention and sustainability, and its emission requirements cover the following national & international assessment programmes, including:

- + AgBB Scheme Germany
- + State building regulations / MVV TB Germany: Requirements for structural installations with regard to health protection (ABG)
- + DGNB International (Level 4)
- + QNG-Ready
- + BREEAM
- + WELL International und LEED v4
- + eco-bau Switzerland
- + Belgian VOC Regulation
- + French VOC Regulation A+

With JORDAN NATURE-FIRE-PROTECT JM7210-3-001, JORDAN Lacke has recently also started to offer a biocide and solvent-free fire protection coating with which solid wood components can be coated in order to achieve a classification of fire behaviour according to EN 13501-1 C-s1-d0.





The eco-Institute is one of the most experienced German laboratories for indoor air analysis and has been committed to healthy indoor air for more than 30 years. The tests set the highest requirements for the most common indoor pollutants and only tolerate significantly lower emission limits than many other standards.

The experts of the eco-Institute confirm that our Natureline products not only protect your wood outdoors, but also ensure healthy indoor air. All Natureline products can be used safely in areas where allergy sufferers, people with health problems, small children and animals are present.



**SENTINEL HOLDING
INSTITUT**


The Sentinel Holding Institut (SHI) describes itself as a knowledge and market leader on the subject of healthy living and has set itself the goal of making healthier buildings the norm. On its website www.sentinel-haus.de you will find information on emission-tested products, trained specialists, certified practical examples, and thematic worlds all about healthier building and renovation. Thanks to its many convincing features, our NATURELINE product line is listed on the portal.





JORDAN NATURE-PUR JM7200-3-001
JORDAN NATURE FIRE-PROTECT JM7210-3-001
JORDAN NATURE-COLOR JK7203
JORDAN NATURE-PUR PLUS PRO JZ7202-0-001

74 – 77



Our wood preservatives for outdoor use provide optimum protection for your wooden surfaces in all weathers. We pay attention not only to wood protection but also to the environment. All our products for outdoor use are therefore free of toxins and other harmful ingredients. With us, you can protect your surfaces sustainably - environmentally and health-friendly for humans and animals.

Certified by the eco-Institute and recommended by the Sentinel Holding Institute. It doesn't get any greener than this!

IN ALL WEATHERS
PRODUCTS FOR OUTDOOR USE



JORDAN NATURE-PUR JM7200-3-001

JORDAN NATURE-PUR 200*



Biocide-free wood preservative for indoor and outdoor use

DELIVERY BATCHES

1, 5 and 25 kg

ADDITIONALS

Cleaning: Water



PRODUCT PROPERTIES

- + purely mineral, solvent- and emission-free¹
- + QNG-Ready
- + without pesticides, insecticides and biocides¹
- + free of extractable heavy metals (acc. EN 71, part 3)
- + leaves no harmful substances in nature¹
- + impregnated wood can have contact with the ground without concern
- + vegan
- + suitable for bats, approved for roosts of endangered species²
- + harmless for bees, after drying, insects are not harmed by contact with the treated wood¹
- + climate resistant, protects against harmful environmental influences including weathering³
- + eliminates the breeding ground of wood-destroying fungi and mould (acc. EN 113)⁴
- + protects against animal wood pests such as termites, house longhorn beetles, powderpost beetles, furniture beetles, woodworm, etc.⁵
- + prevents the spread of wood pests after infestation⁵
- + act as a flame-retardant, the spread of fire and the development of smoke are permanently inhibited⁶


LISTED AT:

- + Sentinel Holding Institute – the institute for healthy buildings
- + European Society for Healthy Building and Indoor Hygiene (EGGBI)
- + Swiss Coordination Office for Bat Protection

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORDAN NATURE FIRE-PROTECT JM7210-3-001

JORDAN NATURE FIRE-PROTECT 210*

NEW!

Flame-retardant, biocide-free wood preservative

DELIVERY BATCHES

1, 5 and 25 kg

ADDITIONALS

Cleaning: Water




ADDITIONAL PRODUCT PROPERTIES

- + purely mineral, solvent- and biocide-free flame retardant
- + no harmful substances
- + low flammability and low smoke emission
- + increases the fire resistance of untreated wooden components
- + achieves fire protection class EN 13501-1 C-s1, d0 (flame retardant) in application with CLT cross laminated timber made of spruce⁷

SCOPE OF APPLICATION



TYPE OF APPLICATION





JORDAN NATURE-COLOR JK7203

JORDAN NATURE-COLOR 203*

**Biocide-free, coloured wood preservative
for indoor and outdoor use**

DELIVERY BATCHES
1, 5 and 25 kg

ADDITIONALS
Cleaning: Water

ADDITIONAL PRODUCT PROPERTIES

- + colours based on mineral pigments
- + used for individual colour design
- + card shades can be mixed with each other
- + non-washable and colourfast

SCOPE OF APPLICATION



TYPE OF APPLICATION



Also available as a starter set.



JORDAN NATURE-PUR PLUS PRO

JZ7202-0-001

JORDAN NATURE-PUR PLUS PRO 202*

**Transparent base material for
JORDAN NATURE-COLOR**

DELIVERY BATCHES
1, 5 and 25 kg

ADDITIONALS
Cleaning: Water

ADDITIONAL PRODUCT PROPERTIES

- + additive to dye or lessen the
JORDAN NATURE-COLOR 203 card shades



TESTED BY:

1. ECO Institute (certification no. ID 1016-33690-002)
2. Swiss Coordination Office for Bat Protection
3. EPH, Entwicklungs- und Prüflabor Holztechnologie GmbH (Nr. 2715644)
4. Department for Forest Products, Faculty of Forest Sciences of the Swedish University of Agricultural Sciences (Nr. Nr. 2011-113/84)
5. Forest Products Department, Mississippi State University
6. SP Technical Research Institute of Sweden
7. MPA Dresden GmbH



WELL
BEAU
CARE A



Whether by hand or machine: With our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

**WELL-CARED AND
BEAUTIFUL IN AN INSTANT
WITH OUR CARE AND CLEANING PRODUCTS**

JORA-CARE-BASIC-CLEANER JZ7920-0-001
JORA-CARE-MAINTENANCE-AGENT JZ7930-0-001
JORA-CARE-WAX-POLISH JW1940-0-001
JORA-CARE-MAINTENANCE-OIL JW1950-0-001
JORA-CARE-MAINTENANCE-OIL JW7955-0-001

JORA-CARE-PLASTIC-CLEANER JZ9960-0-001

78 – 83

* To make it easier for you to switch to the new article descriptions, we have listed the old product names and article numbers in the 2nd line.



JORA-CARE-BASIC-CLEANER

JZ7920-0-001

JORA-CLEAN BASIC CLEANER JCG 920*

PRODUCT PROPERTIES

- + cleaning agent for very dirty surfaces (such as floors)
- + suitable for removing old layers of water-based care products
- + suitable for removing stubborn dirt on sealed parquet

Highly effective cleaning agent for surfaces that are very susceptible to soiling

DELIVERY BATCHES
200 ml and 1 litre

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORA-CARE-MAINTENANCE-AGENT

JZ7930-0-001

JORA-CARE-MAINTENANCE-AGENT JCW 930*

PRODUCT PROPERTIES

- + cares on the base of natural jojoba oil
- + suitable for regular maintenance care of oiled surfaces
- + especially suitable for the care of furniture and lightly stressed parquet floors
- + cleans with the power of oranges

Natural care product suitable for regular application

DELIVERY BATCHES
200 ml and 1 litre

SCOPE OF APPLICATION



TYPE OF APPLICATION





JORA-CARE-WAX-POLISH JW1940-0-001

JORA-CARE WAX POLISH JCW 940*

**Wax polish with protecting properties
for sealed surfaces**

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + easy to use
- + liquid wax mixture
- + highly economical, 1 litre is sufficient for approx. 200m²
- + suitable for the care of sealed parquet floors
- + especially suitable for the initial care of parquet floors
- + ensures efficient edge protection
- + ensures a thin protective film on the surface

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORA-CARE-MAINTENANCE-OIL JW1950-0-001

JORA-CARE MAINTENANCE OIL JCP 950*

**Versatile care oil with short drying time
for oiled surfaces**

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + suitable for regular freshening up of oiled surfaces

SCOPE OF APPLICATION



TYPE OF APPLICATION





JORA-CARE-MAINTENANCE-OIL JW7955-0-001

JORA-CARE MAINTENANCE OIL JCP 955*

Versatile, water-based care oil with short drying time for oiled surfaces

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + contains natural carnauba wax
- + free of VOC and cobalt-free
- + suitable for regular freshening up of oiled surfaces

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORA-CARE-PLASTIC-CLEANER JZ9960-0-001

JORA-CLEAN PLASTIC CLEANER JCK 960*

Plastic cleaner for cleaning of plastic surfaces and edges

DELIVERY BATCHES
200 ml, 1, 2,5 and 25 litre

PRODUCT PROPERTIES

- + for the efficient removal of adhesive residues, glue residues, traces of adhesive tape as well as ballpoint pen, pencil and felt-tipped pen lines
- + also suitable for detaching old stickers
- + can be used for nearly all plastic surfaces such as ABS, melamine, PE, PP or PVC
- + suitable for degreasing of surfaces
- + gentle, streak free cleaning

SCOPE OF APPLICATION



TYPE OF APPLICATION






NOBLE MAISONETTE APARTMENT IN CORE ASH SURFACES - NATURAL AND RESISTANT



The interior design of this holiday apartment in the Rhoe region was on the one side to have a smart room layout but mainly to have a comfortable and cosy atmosphere. This was achieved through the thoughtful use of the selected materials. All the furnishings, such as wall and ceiling panelling, kitchen unit, bathroom, bedroom, the interior doors as well as the dining table and the parquet flooring on the upper floor were made of veneered or solid core ash. In order to preserve the natural look of the materials used and at the same time ensure long-lasting surface protection, the choice fell on products from JORDAN Lacke.

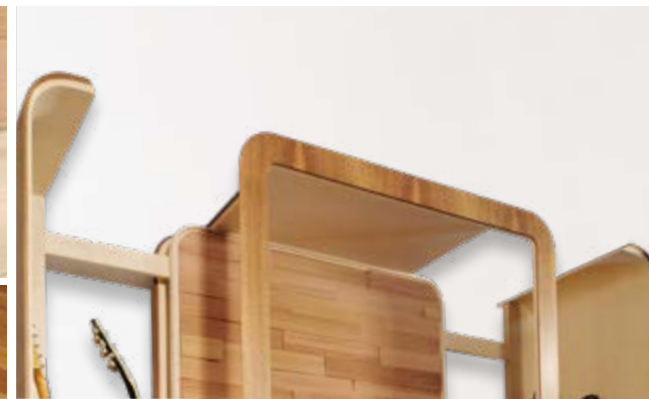

MUSICAL MASTERPIECE IN HIGH CRAFTSMANSHIP

MASTERPIECE REFINED WITH RAW
WOOD EFFECT LACQUER

In this master's examination object, the shape of a guitar should be taken up in design with round contours, but also by the combination of the wood types, maple and walnut. Untreated split wood in the rear panel area is intended to have a climate-balancing effect and create a special atmosphere. In order to be able to install a continuous glass pane at the front, the display case is opened and loaded via pull-out side elements on the left and right. Due to a linear guide it makes it possible to move the sides evenly but also ensures the necessary stability. „The maple in the interior should be protected with a durable coating of JOCOPAN-ROHHOLZEFFEKT LACK JM2186-1-001 from JORDAN Lacke,“ according to Martin Leising.



THINNER AND MACHINE CLEANING

- SPECIAL-THINNER JT1313-0-001
(old: SPECIAL THINNER V 1313)
- NITRO-THINNER JT1415-0-001
(old: NITRO-THINNER V 1415)
- DD-THINNER JT1244-0-001
(old: DD-THINNER V 2244)
- BRILLIANT-THINNER JT1083-0-001
(old: THINNER HG V 2083)
- UNI-CLEAN JT1803-0-001
(old: UNI-WASHING-SOLVENT V 803)
- AQUA-CLEAN JZ9460-0-001
(old: AQUA-CLEAN AC 460)

RETARDER

- RETARDER JT1019-0-001
(old: RETARDER V19)

COLOUR CONCENTRATES

- CLASSIC-COLOR-CONCENTRATE JC1900
(old: CLASSIC-COLOR-CONCENTRATE CCC 1000 - 1009)

ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE

- CLASSIC-PRO-RING-PROTECT JA1802-0-001
(old: CLASSIC-METALMARKING-CONCENTRATE CR 802)

ADDITIVE TO INCREASE THE LIGHT RESISTANCE

- CLASSIC-PRO-UV-PROTECT JA9045-0-001
(old: LIGHT GUARD CONCENTRATE LK 45)

ADDITIVE TO IMPROVE THE ADHESION PROPERTIES

- GLASS-HARDENER JH2135-0-001
(old: GLAS HARDENER GH 135)
- AQUA-CROSSLINKER JH8413-0-001

ADDITIVE TO IMPROVE THE LEVELLING PROPERTIES


- AQUA-PRO-FLOW JA7403-0-001

NEW!

EFFECT PASTES

- LIMED-OAK-PASTE JZ1669-0-001
(old: LIMED-OAK PASTE P 1669)
- DECO-PRO-MATT JA9620-0-001
(old: DECOMATTPASTE DM 621)
- DECO-PRO-MATT JA9620-0-002
(old: DECOMATTPASTE DM 622)
- DECO-PRO-STRUCTURE JA9600-0-001 (coarse)
(old: DECOSTRUCTURE DS 604)
- DECO-PRO-STRUCTURE JA9600-0-002 (fine)
(old: DECOSTRUCTURE DS 605)
- PRO-STRUCTURE JA9048-0-001

THIS AND THAT
PROFESSIONAL ADDITIVES
FOR PERFECT SURFACES

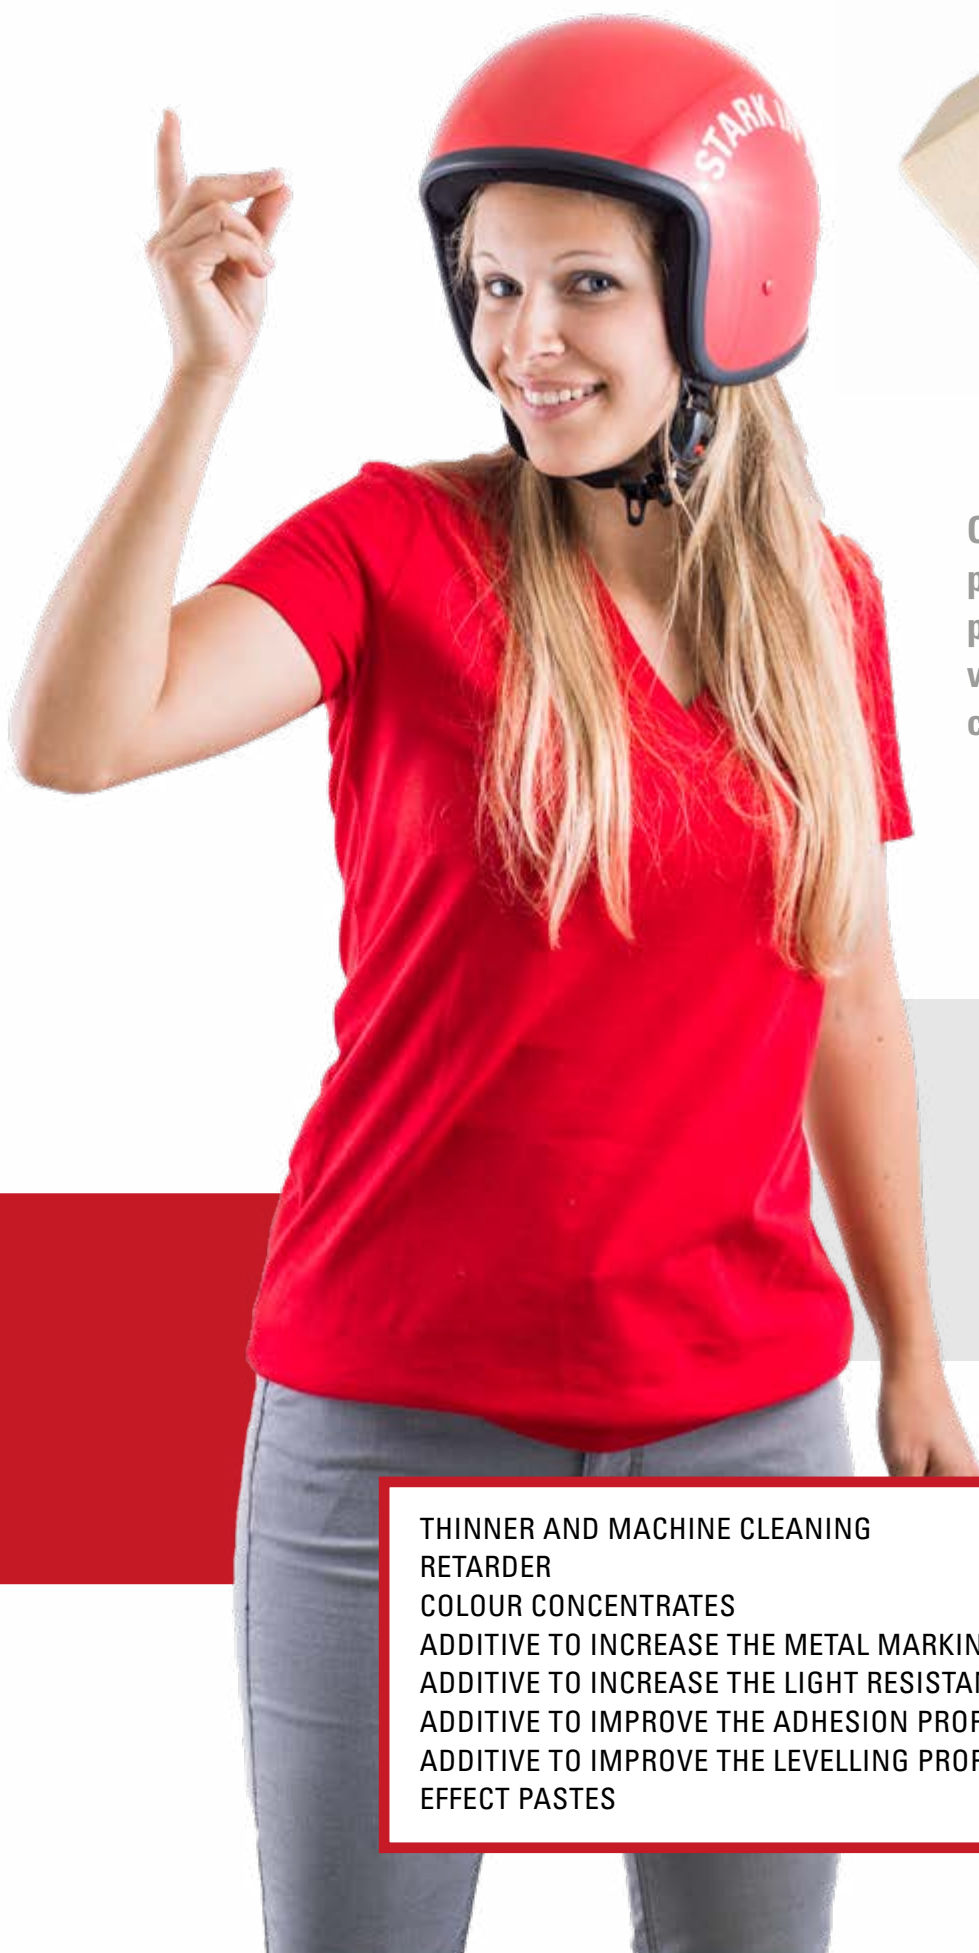

Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

THINNER AND MACHINE CLEANING
RETARDER

COLOUR CONCENTRATES

ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE



ADDITIVE TO INCREASE THE LIGHT RESISTANCE

ADDITIVE TO IMPROVE THE ADHESION PROPERTIES






ADDITIVE TO IMPROVE THE LEVELLING PROPERTIES

EFFECT PASTES






84 – 85

	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
FILLER		AQUA-MAGIC-FILLER JB7430	1C	AQUALINE		excellent filling power and excellent firmness on vertical surfaces
		PUR-FILLER JB2338	2C	CLASSICLINE		pigmented filler with good sealing effect
PRIMER / BASE COATS		AQUA-MAGIC-BASE JB7163-00001	1C	AQUALINE		well sandable and excellent filling power
		CLASSIC-BASE-METAL JB1820	1C	CLASSICLINE		excellent adhesion properties on various metals
		CLASSIC-BASE-GLASS JB1823-0-001	1C	CLASSICLINE		excellent adhesion properties on glass
		JOCOPHEN-BASE JB2010-0-001	2C	CLASSICLINE		very good sealing effect, even with ingredient-rich woods
		HIGH-SOLID-BASE JB2450-0-001	2C	CLASSICLINE		high solid content, ideal as a base coat for buffable high gloss surfaces
		ACRYPUR-BASE JM2310-0-001	2C	CLASSICLINE		transparent base coat with very high filling power
COLOURED LACQUERS		AQUA-MAGIC-COLOR JK7462	1C	AQUALINE		light-stable and environmentally friendly colour lacquer system
		JORA-COLOR JK2150	2C	CLASSICLINE		lightfast colour lacquer system, suitable for the coating of children's toys
		HIGH-SOLID-COLOR JK2600	2C	CLASSICLINE		extremely fast drying, makes it possible to save costs and time
		JORA-BRILLIANT-COLOR JK2855	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance
		COLORLUX-METALLIC JK2378	2C	CLASSICLINE		metallic lacquer system for special adjustments
		JORDAN NATURE-COLOR JK7203	1C	NATURELINE		environmentally friendly, biocide- and pesticide-free colour system
MULTI-LAYER LACQUERS		PUR-MULTI-COAT JM2136	2C	CLASSICLINE		multi-layer lacquer with very high mechanical resistance
		TEMPOFIX-MULTI-COAT JM1017	1C	CLASSICLINE		fast-drying multi-layer lacquer, very easy processing
		HIGH-SOLID-CLEAR JM2400	2C	CLASSICLINE		high solid lacquer, very high filling power and fast drying

GLOSS LEVEL	HARDENER	DIN 4102 B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN-68861-1B/C chemical resistance	OTHERS	PAGE
		yes	yes			DGNB criteria for quality level 4	20, 56, 66
	10:1 by volume with CLASSIC-HARDENER JH2132-0-001	yes	yes				23, 38
			yes			DGNB criteria for quality level 4	20, 48, 56, 66
							25
							25
	2:1 by volume with JOCOPHEN-HARDENER JH2242-0-001		yes				24, 39
	2:1 by volume with HIGH-SOLID-HARDENER JH2023-0-001	yes					25
	10:1 by volume with CLASSIC-HARDENER JH2132-0-001		yes				24, 38
matt		yes	yes	under investigation		DGNB criteria for quality level 4	21, 57, 67
matt	10:1 by volume with CLASSIC-HARDENER JH2132-0-001	yes	yes	yes	1B	Suitability for children's toys	27
semi-gloss (JK2600-5) matt (JK2600-3)	2:1 by volume with HIGH-SOLID-HARDENER JH2022-0-001	yes	yes		1B		26, 39
high gloss	2:1 by volume with BRILLIANT-HARDENER JH2870-0-001	yes	yes		1B		26
matt	10:1 by volume with CLASSIC-HARDENER JH2132-0-001		yes		1B		27, 40
matt							77
semi-gloss (JM2136-5-001) semi-matt (JM2136-4-001) matt (JM2136-3-001) deep-matt (JM2136-2-001)	10:1 by volume with PUR-HARDENER JH2136-0-001		yes	yes	1B		28, 40
semi-gloss (JM1017-5-001) semi-matt (JM1017-4-001)			yes	yes			28
glossy (JM2400-6-001) matt (JM2400-3-001) deep-matt (JM2400-2-001)	2:1 by volume with HIGH-SOLID-HARDENER JH2023-0-001		yes	yes	1B		29

	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
CLEAR LACQUERS		AQUA-MAGIC-CLEAR JM7475	1C	AQUALINE		water-based clear lacquer with high scratch and abrasion resistance
		AQUA-MAGIC-CLEAR JM7477	1C	AQUALINE		elegant appearance for porous woods
		AQUA-STEP JM7490-4-001	1C+2C	AQUALINE		very high light stability and high mechanical resistance
		AQUA-NATURAL-EFFECT JM8420-1-001	2C	AQUALINE		natural raw wood-like surface with good resistance
		JORA-BRILLIANT JF2875-7-001	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance
		JORA-ULTRA-MATT-RESIST JF2492-1-001	2C	CLASSICLINE		ultra matt surface with extremely high gloss stability, anti-fingerprint effect
		CLASSIC-EXTREME-RESIST JM2894	2C	CLASSICLINE		extremely high mechanical and chemical resistance, anti-fingerprint effect
		GIESS-COLORLUX JM2370	2C	CLASSICLINE		lightfast topcoat for curtain coating and spraying
		JOCOPAN-ROHHOLZEFFEKTACK JM2186-1-001	2C	CLASSICLINE		fast drying, resistant natural effect lacquer
		JORDAN NATURE FIRE-PROTECT JM7210-3-001	1C	NATURELINE		increases the flame retardant properties of wood substrates
		JORDAN NATURE-PUR JM7200-3-001	1C	NATURELINE		environmentally friendly, biocide- and pesticide-free wood preservative
WAXES AND OILS		DECO-OIL-COLOR JW1630	1C	DECOLINE		coloured oil in 11 basic shades, all shades can be mixed with each other
		DECO-OIL-CLEAR JW1640-3-001	1C	DECOLINE		water and dirt repellent properties
		DECO-OIL-ECO JW1660-3-001	1C+2C	DECOLINE		very easy processing

GLOSS LEVEL	HARDENER	DIN 4102 B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN-68861-1B/C chemical resistance	OTHERS	PAGE
semi-matt (JM7475-4-001) matt (JM7475-3-001) deep matt (JM7475-2-001)		yes	yes	yes		DGNB criteria for quality level 4	21, 57, 67
semi-matt (JM7477-4-001) matt (JM7477-3-001) deep matt (JM7477-2-001)		yes	yes	yes		DGNB criteria for quality level 4	22, 58, 68
semi-matt	10:1 by volume with AQUA-HARDENER JH8410-0-001	yes	yes	yes	1B	DGNB criteria for quality level 4	22, 48, 58, 68
natural effect	10:1 by volume with AQUA-HARDENER JH8410-0-001		yes	yes	1B	DGNB criteria for quality level 4	23, 59, 69
high gloss	2:1 by volume with BRILLIANT-HARDENER JH2870-0-001	yes	yes	yes	1B		31, 42
natural effect	100:15 by volume with CLASSIC-HARDENER JH2132-0-001		yes	yes	1B		30, 42
deep-matt (JM2894-2-001) natural-effect (JM2894-1-001)	10:1 by volume with CLASSIC-HARDENER JH2132-0-001		yes	yes	1B		29, 41
glossy (JM2370-6-001) semi-gloss (JM2370-5-001) semi-matt (JM2370-4-001) matt (JM2370-3-001) deep-matt (JM2370-2-001) natural effect (JM2370-1-001)	10:1 by volume with CLASSIC-HARDENER JH2132-0-001	yes	yes	yes	1B		30, 41
natural effect	2:1 by volume with JOCOPAN-HARDENER JH2186-0-001		yes	yes	1B		31
matt		yes	yes				76
matt			yes				76
matt					1C	complies GISCODE: Ö60, cobalt-free	32, 49, 59, 69
matt			yes	yes	1C	complies GISCODE: Ö60, cobalt-free	32, 43, 50, 60, 70
matt	10:1 by volume with DECO-OIL-HARDENER JH2613-0-001		yes	yes	1C	complies GISCODE: Ö10+, Ö-Norm C 2380:2021, cobalt-free	33, 43, 50, 60, 70

	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
WAXES AND OILS		DECO-OIL-BRIGHT JW1640-30001	1C	DECOLINE		excellent water resistance
		DECO-OIL-NATURAL-WAX JW1680-3-001	1C	DECOLINE		good penetration behaviour
		DECO-OIL-HARD-WAX JW1610	1C	DECOLINE		extremely good penetration behaviour and easy processing
STAINS		HYDROSTAIN-MODULAR JC73X0	1C	STAINLINE		modular stain system for a wide range of applications
		CLASSICSTAIN JC1731 - JC1833	1C	STAINLINE		mixable base shades for a wide range of creative possibilities
CARE AND CLEANING		JORA-CARE-BASIC-CLEANER JZ7920-0-001		CARELINE		highly effective cleaning agent for heavily soiled surfaces
		JORA-CARE-MAINTENANCE-AGENT JZ7930-0-001		CARELINE		natural cleaning and care product
		JORA-CARE-WAX-POLISH JW1940-0-001		CARELINE		easy to handle polish with protective effect
		JORA-CARE-MAINTENANCE-OIL JW1950-0-001		CARELINE		fast drying care for oiled surfaces
		JORA-CARE-MAINTENANCE-OIL JW7955-0-001		CARELINE		natural, water-based maintenance oil, VOC-free
		JORA-CARE-PLASTIC-CLEANER JZ9960-0-001		CARELINE		effective cleaner for plastic surfaces

LEGEND OF PICTOGRAMS

TYPE OF APPLICATION

	Spray gun		Vacuumcoating
	Dipping		Brushing
	Spatula		Wiping
	Roller		Single-disc machine
	Curtain coating		
	Roller coating		

GLOSS LEVEL	HARDENER	DIN 4102 B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN-68861-1B/C chemical resistance	OTHERS	PAGE
matt			yes	yes	1C	complies GISCODE: Ö 60, cobalt-free	33, 44, 51, 61, 71
semi-matt to matt			yes	yes	1C	complies GISCODE: Ö 60, cobalt-free	34, 44, 51, 61, 71
semi-gloss (JW1610-5-001) matt (JW1610-3-001)			yes	yes	1C	complies GISCODE: Ö 60, cobalt-free	34, 49
							35, 52, 62, 72
							35, 45
							80
							80
							81
							81
							82
							82



SCOPE OF APPLICATION



Indoors/Outdoors



Interior Fittings



Stairs



Furniture



Parquet



Kitchen



Baths



Doors



Metal



Glass



Cleaning



Care

PLANTAG Coatings GmbH

Ohmstraße 8

32758 Detmold

GERMANY

Fon +49 5231 6002 661

E-Mail info@jordanlacke.de

JORDAN Lacke – a brand of PLANTAG Coatings GmbH

