


DAKOTA®

LEVELER PLATE FOR EXTERNAL TILES



Plus

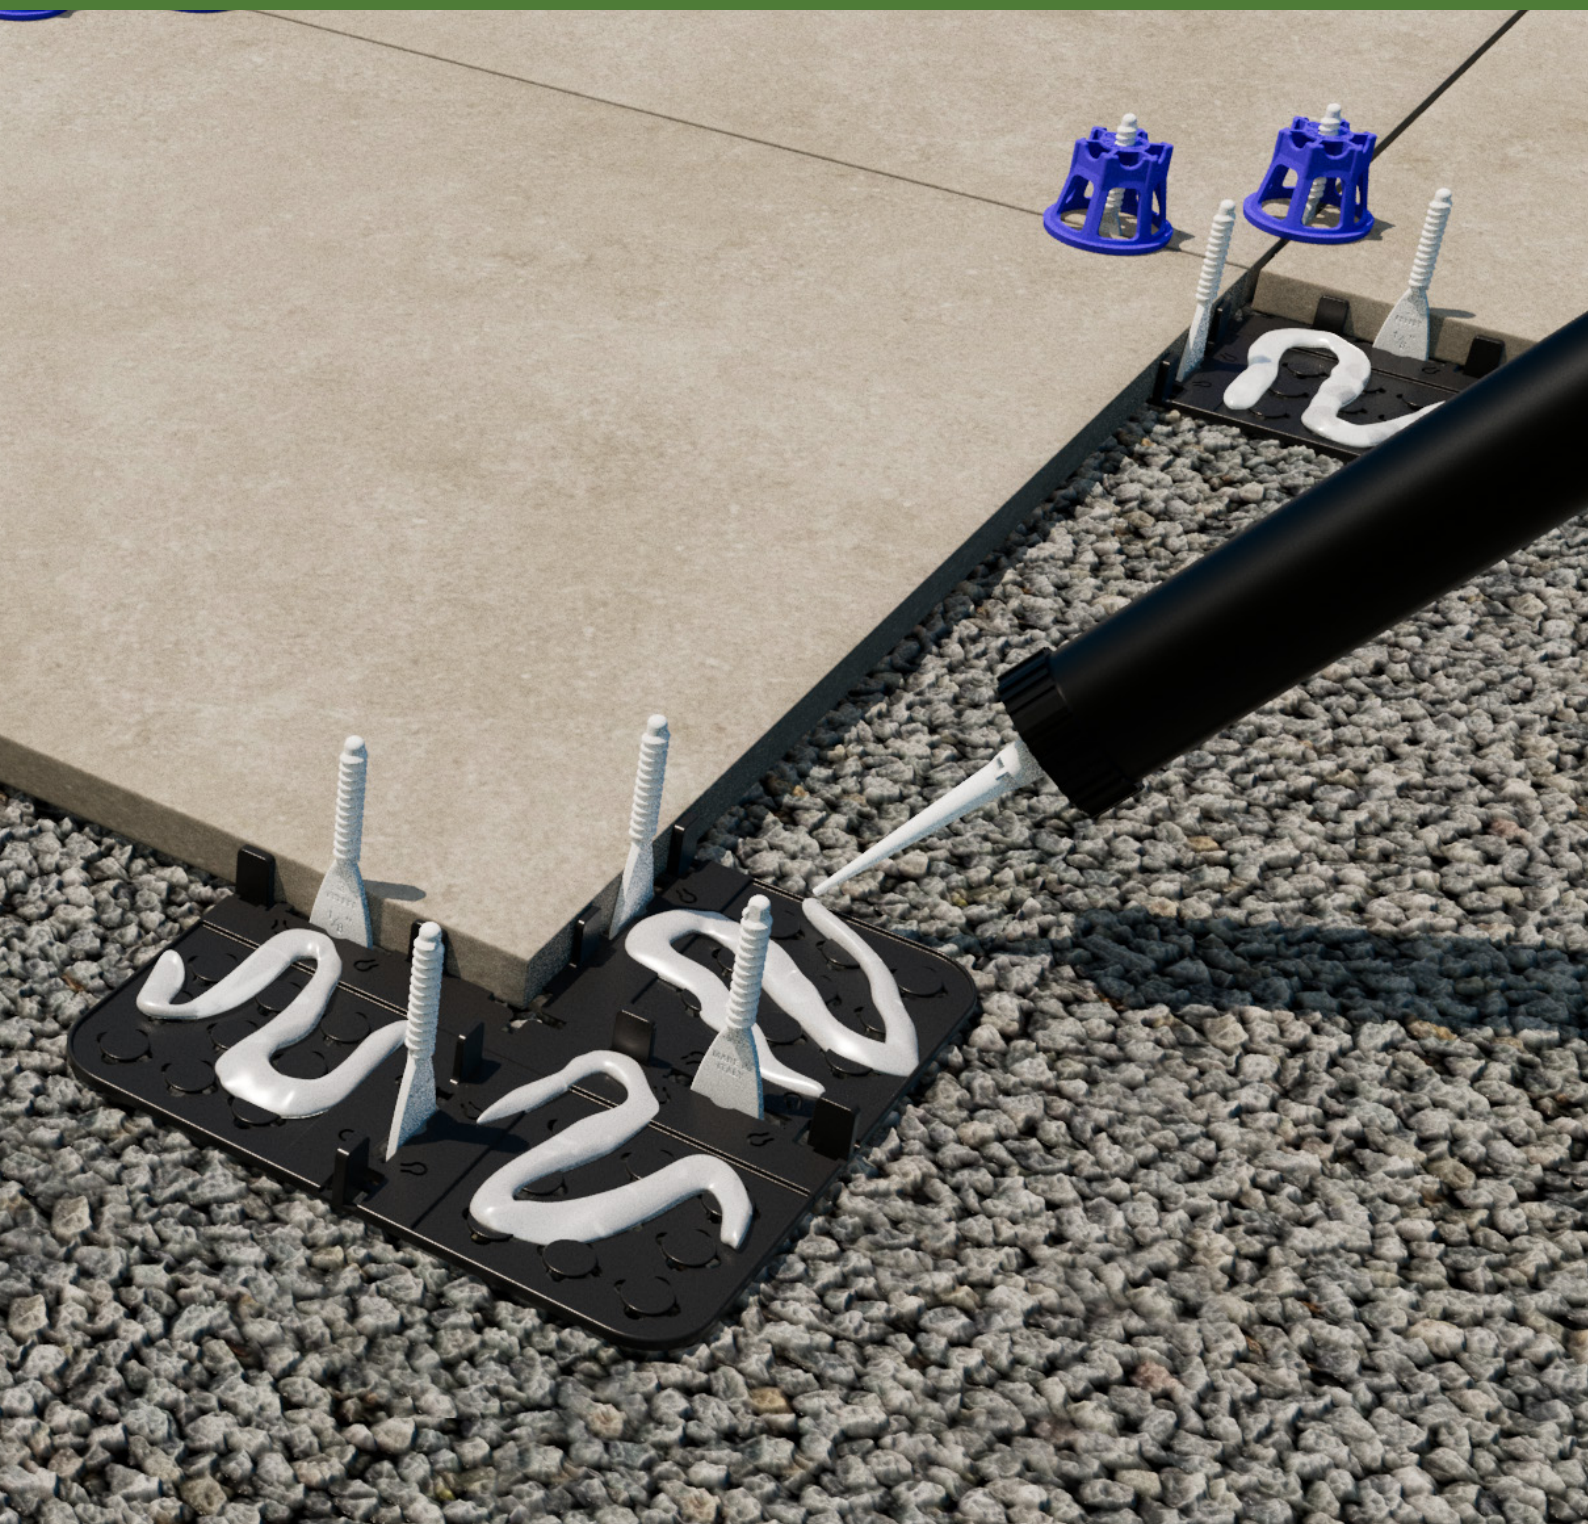


THICKNESS:

Joint thickness is 3 mm or 4 mm.




TILES:

Suitable for tiles of up to max 30 mm thickness.

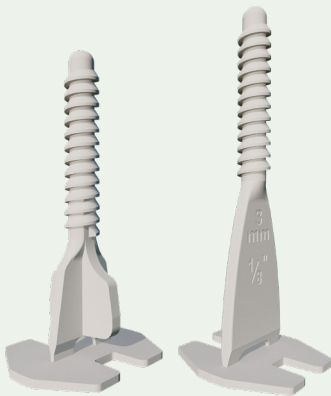

SCREWS:

X or Linear screws.



LITE LEVEL:

Compatible with Lite Level (also available in KIT).



RECYCLE:

100% recycled and recyclable material (PP).



PRE-CUT:

Pre-cut to be splitted it for edge application.

TECHNICAL DETAILS

Code	Product	mm	Pkg.	Pallet	UM
TER09-4350	Set Plate for external Paving Tiles	200 x 200 -3 and 4 joint	1 set	80 set	pc.
TER09-4350P	Plate for external Paving Tiles	200 x 200 -3 and 4 joint	90 pcs.	1.080 pcs.	pc.

DESCRIPTION

Plastic Tile for the laying of external paving tiles on a unstabilized ground. The plate allows the tiles to be fixed and leveled with Dakota Lite Level, in order to avoid any lippage. The plate is for this purpose provided with 4 slots to use the linear leveling screws on each side and a cross-shaped slot, in the center, to apply the Cross leveling screw. In addition, the plate is provided with spacers tabs of 4 and 3mm to get uniform joints. The plate can be broken up into 2 pieces in order to be installed in the corners or near the wall on the perimeter.

The product is available in different packagings:

- plastic bucket set with 40 Lite Level cylinders, 40 linear 3mm screws and 10 plates;
- single elements in cardboard box of 90 pieces each


MATERIAL

100% recycled PP (Polypropylene)

USE

Main features:

- Uniform joints of 3 or 4mm (one model, double choice!)
- Thanks to the use of the integrated leveling system (provided by Dakota), the final result will be perfectly leveled, without any lippage.
- Suitable for tiles of up to max 30 mm thickness
- Exceptionally adaptable, even on gravel ground.

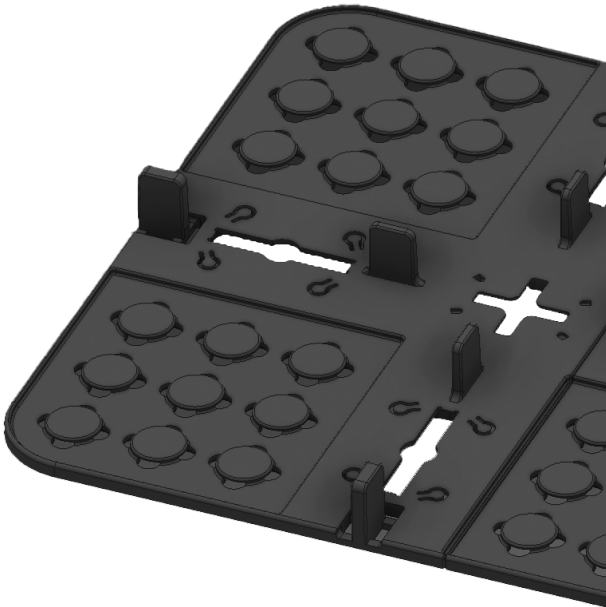


x10 PLATES




x40 LITE LEVEL



x40 LINEAR SCREW



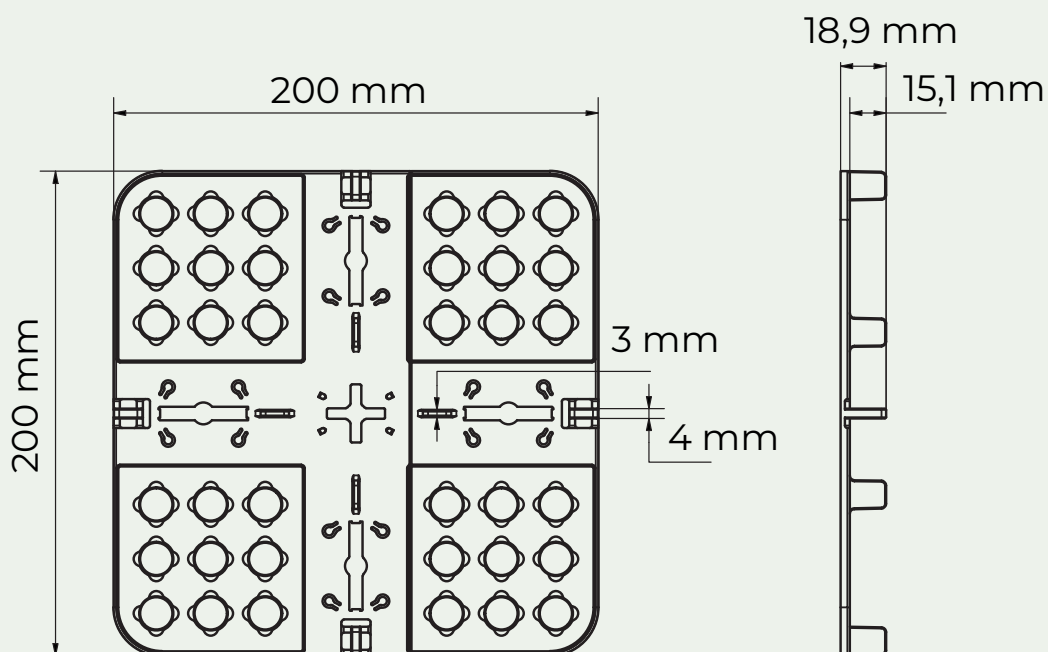




40 x




40 x



10 x



**Discover the product,
watch the video**



FOLLOW US



DAKOTA®

www.dakota.eu
info@dakota.eu

DAKOTA GROUP S.A.S.

CONTACTS

REGISTERED OFFICE
Via Pitagora, 3
37010 Affi, Verona - Italy

T. +39 045 6284080
F. +39 045 4771028
info@dakotaitalia.com

HEADQUARTER
Via Don Cesare Scala, 55
37020 Brentino Belluno - Italy

VAT number: IT 07971400960 | Register of Companies of VERONA no. 07971400960 REA: VR-398568

04.24

