

mesoma


Verpackungsmaschinen GmbH



VMS/VSC – Series


High Performance VFFS



MADE
IN
GERMANY



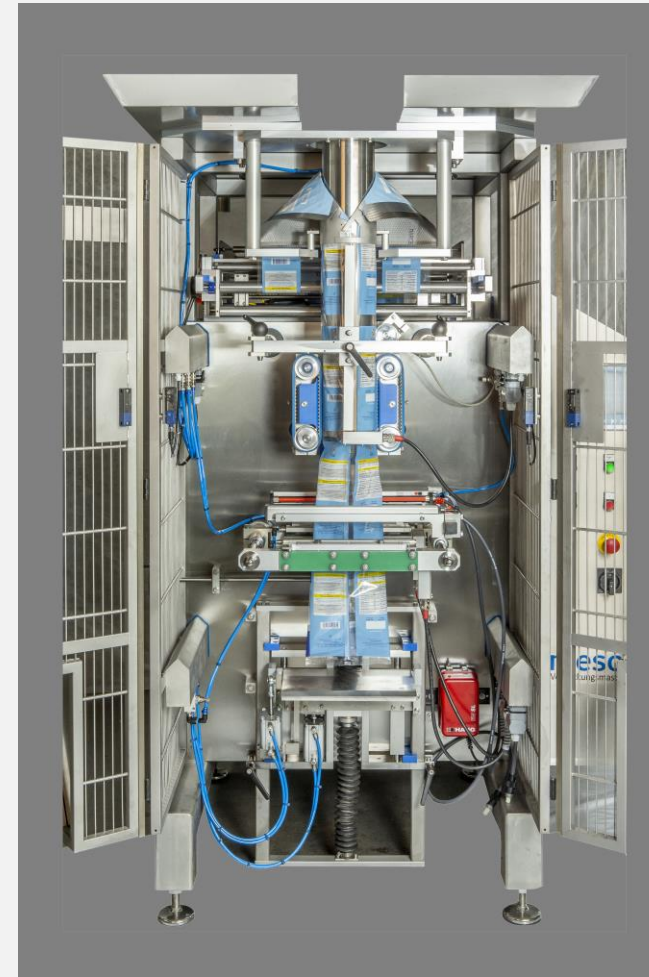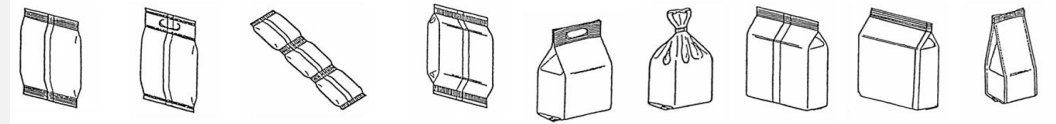

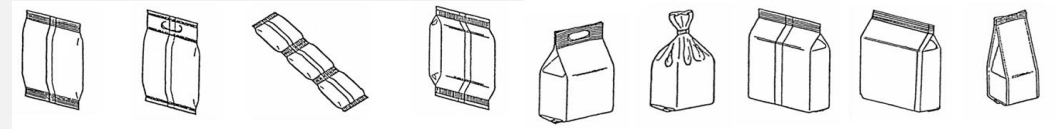


Maintenance free ,
long lasting mechanical system



Motorised film reel unwind
Cutting and taping table for
easy change of film reel



Siemens Simatic PLC
and components.

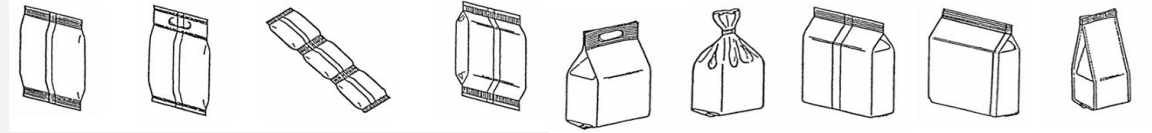


Technical details

- Working mode continuously boxmotion and intermittend
- Servo operated , vakuum supported film transport
- Servo operated boxmotion cross sealing system ensures consistend sealing quality
- Vertical stroke of the cross sealing station up to 220mm ensures suffcient sealing time for laminated films and paper films
- Vertical stroke of the cross sealing station self-adjusting to the settings of sealing time and performance
- Length sealing station continious motion , synchronized to the filmtransport
- Siemens Simatic PLC with Touch-Screen Display
- Washdown full stainless housing , hygienic design

Your benefit


- Universally applicable
- Paperfilm ready
- High performace
- High efficiency
- Short return of investment
- Quick and easy setup and product changeover
- Easy sanitation
- User-friendly
- Low noise pollution
- Low wear and tear
- Low energy consumption
- Industry 4.0 prepared

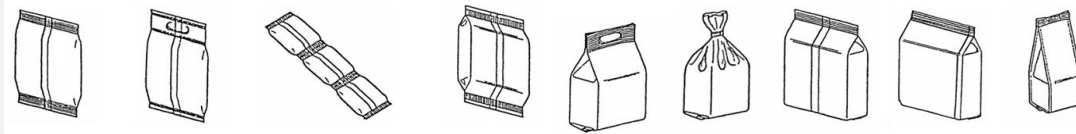

Technical data :	VSC 260	VSC 320	VSC 420	VSC 450
Bag width (min. -max.)	60-260mm	100-320mm	150-420mm	150-450mm
Bag length (min. -max.)	80-500mm	100-550mm	150-700mm	150-900mm
Bag volume (max .)	7.000ccm	12.000ccm	20.000ccm	25.000ccm
Performance * (max.)	150 B/min	120 B/min	110 B/min	100 B/min
Dimension (D x W x H)	2025 x 1370 x 1780 mm	2025 x 1370 x 1780 mm	2025 x 1370 x 1980 mm	2025 x 1370 x 1980 mm
Weight	ca. 1.200kg	ca. 1.200kg	ca. 1.500kg	ca. 1.500kg
Electr. consumption	ca. 5,0 kW	ca. 5,0 kW	ca. 5,0 kW	ca. 5,0 kW
Electr. supply	3 x 400V - N -PE-50Hz	3 x 400V - N -PE-50Hz	3 x 400V - N -PE-50Hz	3 x 400V - N -PE-50Hz
Pressure air supply (Hotsealing) **	250NI/min	250NI/min	250NI/min	250NI/min
Pressure air supply (Impulswelding) **	600 NI/min	600 NI/min	600 NI/min	600 NI/min
Film width (max .)	550mm	670mm	870mm	950mm
Film reel diameter	450mm(opt. 650mm)	450mm(opt. 650mm)	450mm(opt. 650mm)	450mm(opt. 650mm)


* Related to film and product

** related to film and product

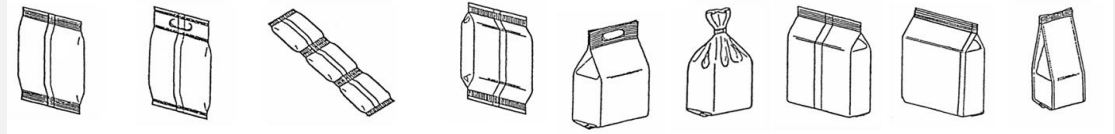


Well established in the industry



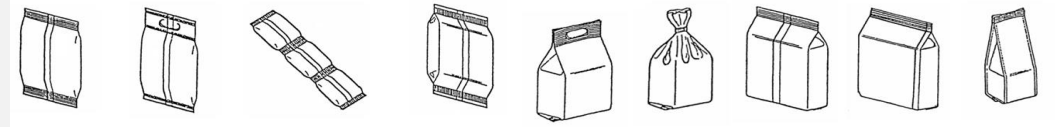


Well established in the bakery industry : turn key solutions

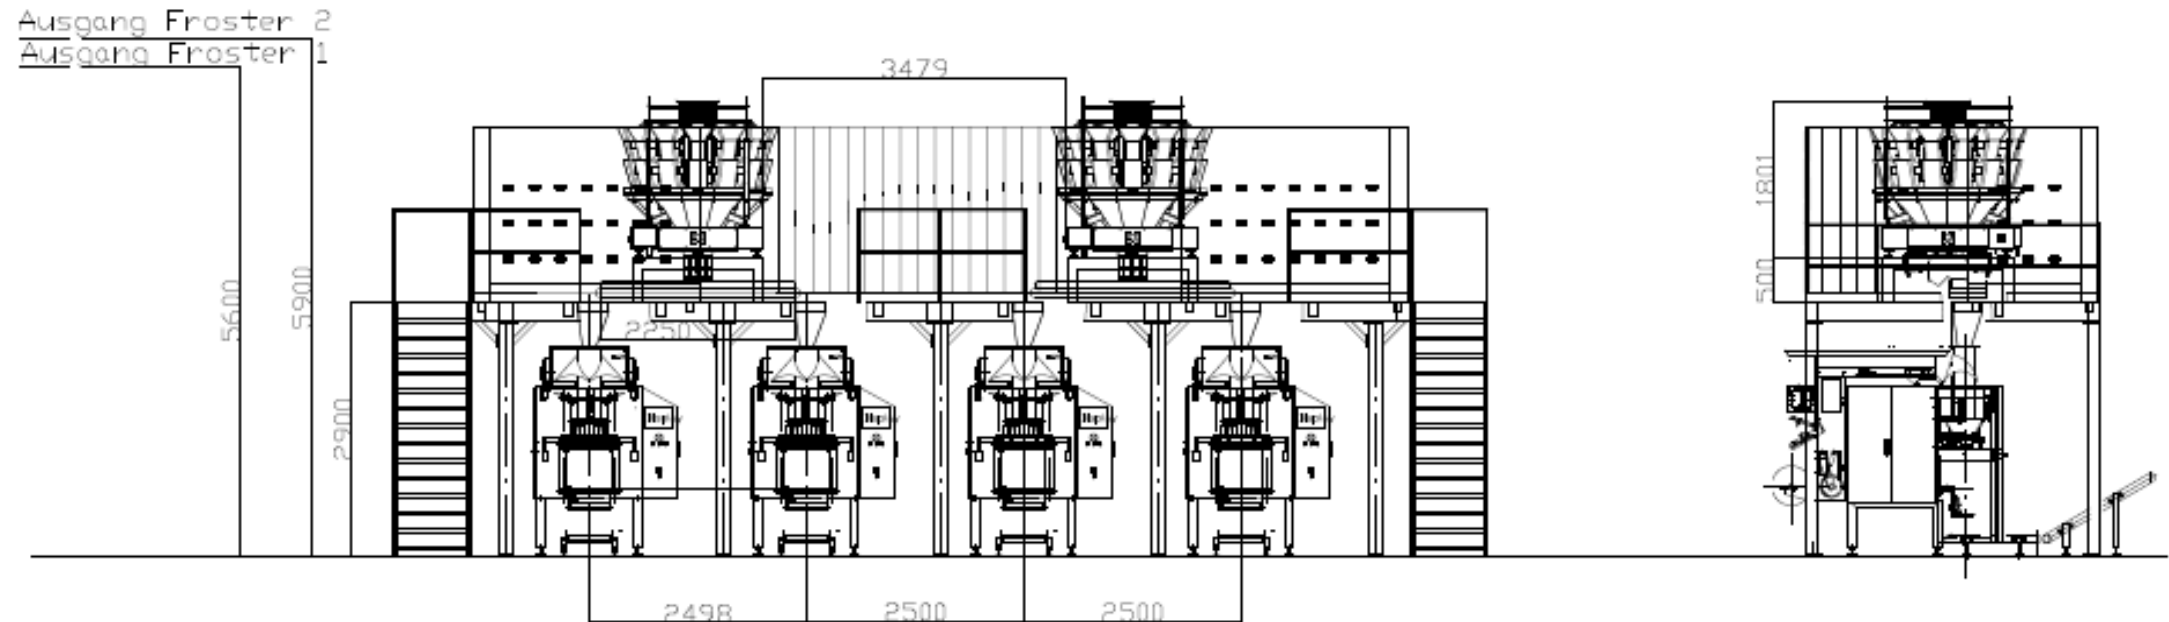

mesoma

VMS/VSC Series

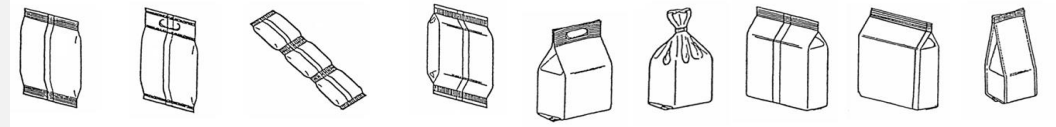

Made in Germany

model VSC260



mesoma GmbH
mesoma Verpackungsmaschinen GmbH
Eisenstrasse 20
35584 Wetzlar

Tel.: +49 (0) 6441 50120
info@mesoma.de
www.mesoma.de