

**SPORT OPTICS  
SHOOTING, HUNTING, OUTDOOR, & TACTICAL GEARS**

# ENJO SPORTS

**GUN CLEANING KITS & ACCESSORIES  
LIGHTING & LASER**

Enjo Sports Inc is professional manufacturer of sporting goods dedicated to the Shooting, Hunting, Outdoor, and Tactical (SHOT) industry. We provide reliable service to partners of varied types in the industry, such as brand names, distributors, contractors, design firms, etc., with fast response and flexible capacities of OEM/ODM solutions.

With over 15 years of concentration in the SHOT industry, Enjo Sports always attach importance to customer satisfaction and suggestion, and are constantly monitoring market need to persistently update and improve our product offerings to fulfill end-user demands as well as elevating the profitability of our valued partners.

We look forward to forging and enhancing win-win cooperation with you. Flip through this catalog to know what we offer, and visit our websites for more product offerings. Don't hesitate to reach out for customization need of our ready products does not fit your need.





# ZIKKA SERIES



## ZIKKA 22X17 DSL22

### COMPACT REFLEX SIGHT FOR HANDGUNS AND LIGHT RIFLES

- 5000G shockproof aluminum housing for true firearm recoil
- Choice of 3 MOA or 6 MOA dot for precision or faster target acquisition
- 9 brightness settings – 7 for daylight, 2 NV compatible
- Shake Awake motion sensor extends battery life
- Top-loading battery allows quick replacement without losing zero
- RMS/RMSc mounting footprint, fits most optic-ready handguns
- Included low profile base to Picatinny rail



Picatinny Mount



## ZIKKA PLUS 24X18 DSL27

### ENHANCED REFLEX SIGHT WITH GLARE-CUTTING FRAME, IDEAL FOR OUTDOOR SHOOTERS

- Rugged aluminum body, 5000G shockproof for heavy use
- Wider frame design reduces stray light for a cleaner sight picture
- Choice of 3 MOA or 6 MOA dot for different shooting needs
- 11 brightness settings – 7 daylight + 2 NV for low-light adaptability + 2 Extra bright setting
- Shake Awake motion sensor for efficient power management
- Side-loading battery, RMR footprint for broad compatibility
- Included low profile base to Picatinny rail



Picatinny Mount



## ZIKKA SE 22X17 DSL26

- 3 MOA DSL26R3
- 6 MOA DSL26R6
- 3 MOA DSL26G3



### LIGHTWEIGHT, COST-EFFECTIVE REFLEX SIGHTS FOR ENTRY-LEVEL USERS AND COMBO PACKAGES

- Weapon-grade Polymer housing keeps weight and price low while maintaining optical clarity
- Available with 3 MOA or 6 MOA dot, in red or green versions
- ZIKKA SE: Automatic brightness adjustment to ambient light
- ZIKKA ST: 11 levels of brightness with 2 NV and 1 extra-bright settings with buttons
- Powered by CR1632 battery; SE with RMS footprint, ST with RMR footprint
- Ideal for airguns, rimfire rifles, and starter kit bundles



## ZIKKA ST 24X18 DSL30

- 3 MOA DSL30R3
- 6 MOA DSL30R6
- 3 MOA DSL30G3



### OPTIONAL MOUNT

- **RDM-RMS-PK01** for RMS footprint
- **RDM-RMR-PK01** for RMR footprint

## SPECIFICATIONS

SERIES	ITEM	DOT SIZE	RECTICLE	BRIGHTNESS LEVELS	MOUNT FOOTPRINT	WINDOW SIZE (MM)	ADJUSTMENT GRADUATION	BATTERY TYPE	BATTERY LIFE	PRODUCT SIZE (MM)	WEIGHT (G)
ZIKKA	DSL22R3	3 MOA	Red Dot	9	for RMS/RMSc	22x17	1MOA/Click	CR1632	8,000+ hrs	40.5x27x24.7	25
	DSL22R6	6 MOA									
ZIKKA PLUS	DSL27R3	3 MOA	Red Dot	11	for RMR	24x18	1MOA/Click	CR2032	20,000+ hrs	45.1x31x27	40
	DSL27R6	6 MOA									
ZIKKA SE	DSL26R3	3 MOA	Red Dot	Automatic	for RMS	22x17	Continuous	CR1632	8,000+ hrs	40.7x27.9x26	20
	DSL26R6	6 MOA									
	DSL26G3	3 MOA									
ZIKKA ST	DSL30R3	3 MOA	Red Dot	11	for RMR	24x18	Continuous	CR1632	8,000+ hrs	45.2x31x28.5	25
	DSL30R6	6 MOA									
	DSL30G3	3 MOA									



## XEED SERIES



• 3.5 MOA  
DSL17R

### XEED 21X16 DSL17R

#### ULTRA-SLIM REFLEX SIGHT DESIGNED FOR SUBCOMPACT PISTOLS AND CONCEALED CARRY

- Precision 7075 aluminum housing for strength and low weight
- Automatic brightness adjustment adaptive to ambient light conditions
- Low-energy LED with 50,000 working hour
- Rear sight to further accelerate target acquisition
- Compatible RMS/RMSc footprint fits most slimline handguns
- Included low profile base to Picatinny rail
- Stable performance for everyday carry or range use



Picatinny Mount



• 3.5 MOA  
DSL19R  
• 3.5 MOA  
DSL19G

### XEED G2 22X17 DSL19

#### UPGRADED SLIM REFLEX SIGHT WITH USER CONTROL

- Side-loading CR1632 battery for tool-free replacement
- 11 levels of Red Dot brightness with 2 Night Vision Setting
- Aspherical lens provides a crisp, distortion-free dot
- Red or green dot options to suit preference
- RMS/RMSc footprint for modern subcompact pistols
- Included low profile base to Picatinny rail



Picatinny Mount

## ALPHA SERIES



### ALPHA 34X23



### DSL28

• 6 MOA  
DSL28R6

• 2 MOA / 50 MOA  
DSL28RV



### ALPHA-X 30X23



### DSL29

• 3 MOA  
DSL29R3  
• 6 MOA  
DSL29R6



#### COMPETITION-READY LARGE-WINDOW REFLEX SIGHTS FOR AIR SHOOTERS AND ACTION SPORTS

- Oversized windows (ALPHA 34x23mm/ALPHA-X 30x23mm) for quick sight alignment
- 5000G shockproof and IPX7 waterproof for rugged conditions
- Side-loading battery for hassle-free swaps without zero loss
- Shake Awake feature conserves battery while staying ready
- ALPHA with RTS2 footprint, ALPHA-X with RMR footprint
- Included base mount to picatinny rails
- Built for competition, tactical training, and demanding shooters



ALPHA  
Low base mount to Picatinny rail



ALPHA-X  
Low base mount to Picatinny rail

## SPECIFICATIONS

SERIES	ITEM	DOT SIZE	RECTICLE	BRIGHTNESS LEVELS	MOUNT FOOTPRINT	WINDOW SIZE (MM)	ADJUSTMENT GRADUATION	BATTERY TYPE	BATTERY LIFE	PRODUCT SIZE (MM)	WEIGHT (G)
XEED	DSL17R	3.5 MOA	Red Dot	Automatic	for RMS/RMSc	21x16	Continuous	CR2032	20,000+ hrs	40.7x23.1x22.8	17
	DSL19R	3.5 MOA	Red Dot	11	for RMS/RMSc	22x17	1MOA/Click	CR1632	10,000+ hrs	40.7x26.4x25	24
DSL19G	Green Dot										
ALPHA	DSL28R6	6 MOA	Red Dot	11	for RTS2	34x23	1MOA/Click	CR2032	20,000+ hrs	50.8x37.5x32.5	49
	DSL28RV	2 MOA / 50 MOA	Red Dot & Circle								
ALPHA-X	DSL29R3	3 MOA	Red Dot	11	for RMR	30x23	1MOA/Click	CR2032	20,000+ hrs	51x35.1x32.6	48
	DSL29R6	6 MOA									


**ROVAC 20X16**
**DST29RS5**

**ULTRA-COMPACT ENCLOSED RED DOT WITH SOLAR ASSIST, BUILT FOR HANDGUNS AND COMPACT RIFLES.**

- Dual power: side-loading battery plus solar panel for extended use
- Comes with both low and high mounts for versatile setups
- Fits RMR and RMS/RMSc base plates for maximum compatibility
- Weather-resistant sealed housing for outdoor reliability
- Ideal for EDC pistols, carbines, or duty weapons needing enclosed optics


**GUARD 28X19**
**DST22RS3**

**VERSATILE ENCLOSED RED DOT FOR RIFLES, SHOTGUNS, AND OPTIC-READY HANDGUNS**

- Rugged sealed housing, built to hold zero under recoil and rough conditions
- Dual power system: CR2032 battery with solar power for extended runtime
- Comes with RMSc adapter plate, making it compatible with select handguns
- Weatherproof design for all-weather hunting or tactical use
- Suitable for AR platforms, shotguns, carbines, and large-frame pistols


**JAGUAR 23X19**
**DSL16R3**


**RELIABLE REFLEX SIGHT FOR PLATFORMS USING THE DOCTOR/NOBLEX FOOTPRINT**

- Durable build ideal for older optic-ready handguns and rifles
- Maintains compact form while delivering consistent accuracy
- 10 levels of Red Dot brightness with 2 Night Vision Setting
- Motion trigger to automatically turn ON/OFF: Shake to turn on & off when idling for 5 minutes
- Side-loading CR2032 battery for convenient replacement
- Included base mount to picatinny rails


**PALLAS 28X19**
**DSL07**

**LARGE-WINDOW REFLEX SIGHT FOR FAST AIMING ON RIFLES, PCC, OR HUNTING SETUPS**

- Wide field of view for rapid target acquisition
- Aspherical lens for superior clarity across the window
- Side-loading battery with extended runtime
- RMR footprint ensures broad platform compatibility
- 11 brightness levels with 2 Night Vision setting
- Included base mount to picatinny rails
- Suited for AR rifles, PCC, and shotgun users needing fast sight picture

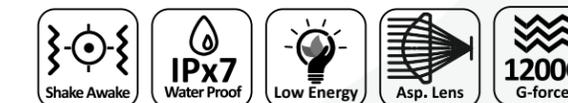


## SPECIFICATIONS

SERIES	ITEM	DOT SIZE	RECTICLE	BRIGHTNESS LEVELS	MOUNT FOOTPRINT	WINDOW SIZE (MM)	ADJUSTMENT GRADUATION	BATTERY TYPE	BATTERY LIFE	PRODUCT SIZE (MM)	WEIGHT (G)
JAGUAR	DSL16R3	3.5 MOA	Red Dot	10	Doctor/Noblex	23x19	1MOA/Click	CR2032	20,000+ hrs	45.9x28.1x26.4	30
PALLAS	DSL07R3	3 MOA	Red Dot	11	For RMR	28x19	1MOA/Click	CR2032	20,000+ hrs	45.1x31.4x27.9	39
	DSL07RV	3MOA / 40 MOA	Red Dot & Circle								
ROVAC	DST29RS3	3 MOA	Red Dot	9	For RMS/RMSc/RMR	20x16	1MOA/Click	CR1632	8,000+ hrs	40.6x34x32	58
	DST29RS6	6 MOA									
GUARD	DST22RS3	3.5 MOA	Red Dot	11	for RMSc/Picatinny	28x19	1MOA/Click	CR2032	20,000+ hrs	30.6x31.3x45.8	62



# THUNDER SERIES

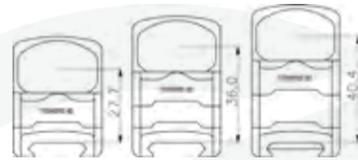


• • • 2 MOA / 40 MOA

## THUNDER G2 30X22 DSL24RV

**OPEN REFLEX SIGHT WITH LARGE VIEWING WINDOW FOR RIFLES AND SHOTGUNS**

- Large-window design for rapid target acquisition on long guns
- Includes different height Picatinny mounts for flexible setups
- Side-loading battery for easy replacement without losing zero
- Selectable reticle patterns (switchable dot/reticle for different shooting styles)
- Built to handle recoil from centerfire rifles and shotguns
- Ideal for hunters, 3-Gun competitors, and tactical carbines

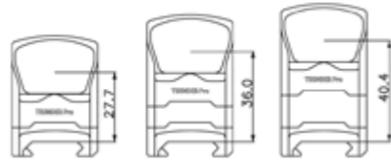

• • • 2 MOA / 40 MOA

## THUNDER PRO 30X22 DST32RSV

**SEALED, SOLAR-POWERED ENCLOSED RED DOT FOR HEAVY-DUTY RIFLES AND CARBINES**

- Fully enclosed housing for maximum durability and weather resistance
- Dual power system: CR2032 battery with solar assist for long runtime
- Large viewing window for fast sight picture acquisition
- Side-loading battery design ensures quick swaps in the field
- Holds zero under heavy recoil and tough outdoor conditions
- Perfect for tactical users, hunters, and LE professionals needing rugged optics



# TORNA SERIES



• 2 MOA

## TORNA 1X25 DST17R

**ENCLOSED REFLEX SIGHT FOR TACTICAL, HUNTING, AND DIFFERENT SCENARIOS**

- 10 Levels of Red Dot brightness with 2 Night Vision Setting
- Low-energy-consumption LED with extended battery life up to 50,000 hours
- One-piece streamlined aluminum housing with protected elevation and windage turret
- Included low base (center-height: 23mm) and QD high base (center-height: 40mm) to mount on Picatinny rail
- Power by Battery: 1x CR2032



• 2 MOA  
• 40 MOA

## TORNA II 1X25 DST25RSV

**SOLAR-POWERED REFLEX SIGHT FOR RIFLES, SHOTGUNS, AND TACTICAL CARBINES**

- 11 Levels of Red Dot brightness with 2 Night Vision and 2 Extra Bright Setting
- Solar-powered operation: In strong outdoor lighting, Torna II runs purely on solar energy – no battery needed Manual brightness control even in solar mode
- One-piece aluminum housing with protected elevation and windage turret
- Included low base (center-height: 23mm) and QD high base (center- height: 40mm) to mount on Picatinny rail



# SPECIFICATIONS

SERIES	ITEM	DOT SIZE	RECTICLE	BRIGHTNESS LEVELS	MOUNT FOOTPRINT	WINDOW SIZE (MM)	ADJUSTMENT GRADUATION	BATTERY TYPE	BATTERY LIFE	PRODUCT SIZE (MM)	WEIGHT (G)
THUNDER G2	DSL24RV	2 MOA / 40 MOA	Red Dot & Circle	11	Picatinny	30x22	1MOA/Click	CR2032	50,000+ hrs	69.9x33.9x32.5	111
THUNDER PRO	DST32RSV	2 MOA / 40 MOA	Red Dot & Circle	11	Picatinny	30x22	1MOA/Click	CR2032	50,000+ hrs	69.8x33.8x36	131
TORNA	DST17R	2 MOA	Red Dot	10	Picatinny	1x25	0.5 MOA/Click	CR2032	50,000+ hrs	69.8x45.6x40.5	98
TORNA II	DST25RSV	2 MOA / 40 MOA	Red Dot & Circle	11	Picatinny	1x25	0.5 MOA/Click	CR2032	50,000+ hrs	69.9x47x42	124


**OCELOT 1X20**      **DST11RD**

• 3 MOA

**STRIKES A PERFECT BALANCE BETWEEN VALUE AND QUALITY**

- 10 Levels of Red Dot brightness
- Aluminum Alloy Housing protected with rubber armor
- Compatible with Aimpoint footprint
- Included high and low base to mount on MIL-STD
- Comes with kill flash
- Power by battery: 1 x CR2032



Picatinny Mount


**STRIKE 1X20**      **DST36R**

• 2 MOA

**ENCLOSED REFLEX SIGHT FOR HIGH-PERFORMANCE SHOOTING**

- 7 Levels of Red Dot brightness with 2 Night Vision Setting
- Adopts low-energy consumption LED emitter for longer service
- T1 footprint with tool-free mount for swift mount and dismantling
- Designed with standard base with raiser plate to fit 36mm and 40.4mm centerheight, and you can also choose an optional high base of 47mm center-height for different tactical need
- Power-supply by AAA battery for convenient replacement



Raiser plate


**ZERO 1X22**      **DST28R**

• 2 MOA

**COMPACT ENCLOSED RED DOT SIGHT WITH TOOL FREE TACTICAL TURRETS**

- 10 Levels of Red Dot brightness with 2 Night Vision Setting
- Motion-activated automatic ON/OFF for instantaneous tactic
- Tool-free tactical turrets for easy adjustment during mission
- Low-energy LED with up to 50,000 working hour for reliable service
- Superior optics provides bright and clear view
- Compatible with a MIL-STD-1913 rail
- Power by Battery: 1x CR1/3N OR 2x LR44


**QUAKE 31X26**      **DST18R**

• 2 MOA/50 MOA

**HEAVY-DUTY TACTICAL-GRADE REFLEX SIGHT, BUILT FOR SPEED AND DURABILITY**

- 6 Levels of Red Dot brightness with 2 Night Vision Setting
- One-piece aluminum housing reinforced with robust steel frame that provide invulnerable protection
- Large window assures fast and accurate target acquisition
- Included low profile base mount on Picatinny rail with 37.5mm center height
- Power by Battery: 2x AAA



## SPECIFICATIONS

SERIES	ITEM	DOT SIZE	RECTICLE	BRIGHTNESS LEVELS	MOUNT FOOTPRINT	WINDOW SIZE (MM)	ADJUSTMENT GRADUATION	BATTERY TYPE	BATTERY LIFE	PRODUCT SIZE (MM)	WEIGHT (G)
STRIKE	DST36R	2 MOA	Red Dot	7	Picatinny	1x20	1MOA/Click	AAA	8,000+ hrs	86.4x40.7x39	167
OCELOT	DST11RD	3 MOA	Red Dot	10	Picatinny	1x20	1MOA/Click	CR2032	50,000+ hrs	79.4x42.5x43.7	154
ZERO	DST28R	2 MOA	Red Dot	10	Picatinny	1x22	0.5 MOA/Click	CR1/3N x1 or LR44 x2	50,000+ hrs	63.2x45.8x46.3	106
QUAKE	DST18R	2 MOA / 50 MOA	Red Dot & Circle	6	Picatinny	31x26	0.5 MOA/Click	AAA x2	2,000+ hrs	92x35.4x46.9	320



### TALOS 5X30 PRISM SCOPE PS09530

THE PERFECT CHOICE FOR CLOSE-QUARTERS TO MEDIUM-RANGE ENGAGEMENT OR COMPETITIONS

- Illuminated reticle with 10 levels brightness
- Compact design with a short tube and generous eye-relief
- Extra bright optics delivers images with high clarity
- Nitrogen-purged and O-ring sealed for fog/waterproof
- Low base (center-height: 27.5mm) and QD high base (center-height: 36mm)
- Power by Battery: 1x CR2032



### TALOS 1X18 PRISM SCOPE PS09118

BUILT FOR SPEED, CLARITY, AND INSTINCTIVE CLOSE-RANGE SHOOTING

- Illuminated Red/Green, 10 brightness levels with 2 NV modes + 1 Extra Bright setting
- Extra bright optics delivers images with high clarity
- Micro-motion activation (touch/vibration) + 3min timeout
- Low base (center-height: 25.4mm) and high base (center-height: 36mm and 40.4mm)
- Ideal for CQC, hunting, tactical shooting and fast target acquisition in dynamic scenarios
- Power by Battery: 1x CR2032



### MAGO 3X MAGNIFIER MG01F3

MAGNIFIER + REFLEX SIGHT COMBO: FAST CQB AIMING WITH PRECISION MID-RANGE VERSATILITY.

- Pairing with Dot Sight for 3x magnified sighting
- Optimal optics and compact size only 82mm long
- Fully multi-coating for enhanced brightness
- Nitrogen-purged and O-ring sealed for waterproof and fogproof
- Solid CNC machined aircraft grade aluminum body protected with rubber armor
- Quick-release amount allows fast attach/detach
- Riser-spacer included to adapt for center-height of either 36.6mm or 39.6mm



### LYCO 4X MAGNIFIER MG02F4

MAGNIFIER + REFLEX SIGHT COMBO: FAST CQB AIMING WITH PRECISION MID-RANGE VERSATILITY.

- Pairing with Dot Sight for 4x magnified sighting
- Superior fully multi-coated optics with high clarity and brightness
- Extra compact with very short tubes and long eye-relief
- Nitrogen-purged and O-ring sealed for waterproof and fogproof
- Solid CNC machined aircraft grade aluminum housing
- Riser-spacer included to adapt for center-height of either 36mm or 40.4mm
- Flip-to-side mechanism for easy switch between close-engagement and medium-range tactics



## SPECIFICATIONS

SERIES	ITEM	MAGNIFICATION	Model	RETICLE COLOR	BRIGHTNESS LEVELS	FIELD OF VIEW			ADJUSTMENT GRADUATION	ADJUSTMENT RANGE	G-force	EYE RELIEF (mm)	EXIT PUPIL(mm)	PARALLAX	WEIGHT (G)
						ANGLE(°)	FT@100YDS	M@100M							
TALOS	PS09118	1x	1x18	Red /Green	10	16.4°	86.4	28.8	1 MOA	100 MOA (±50MOA)	1500G	67.5	16.5	≤1 MOA	180
TALOS	PS09530	5x	5x30	Red	10	4.4°	23	7.7	1 MOA	≥60 MOA	1500G	72	6	≤1 MOA	267
MAGO	MG01F3	3x	3x22	/	/	7.5°	39.3	13.1	/	≥45 MOA	800G	62	7.3	≤1 MOA	292
LYCO	MG02F4	4x	4x24	/	/	5.5°	32.8	9.6	/	≥60 MOA	800G	73	6	≤1 MOA	243




# REAPER SERIES

## LPVO SCOPE

The NUTREK REAPER series of riflescopes is a reliable and versatile choice for hunters and tactical shooters alike. Available in three zoom ranges: 6x, 8x, and 10x. The REAPER scopes are ideal for driven hunts and close-to-medium-range stalk or ambush hunting. With a high zoom ratio starting from 1x, they also perform excellently in close- to medium-range tactical scenarios.



- Lightweight and powerful scope with a wide 6-10x zoom magnification range, ideal for fast action at close range and precise aiming at long distances
- Premium anti-reflective coating scheme delivers an extra bright and clear view across all lighting conditions
- Illuminated reticle enhances target acquisition in low light, with fiber-enhanced brightness for clear aiming—even under bright sunlight
- Low-profile, capped turrets to prevent field of view obstruction and protect against accidental adjustments
- Shock-resistant rated to 1000G, capable of handling heavy recoil from hunting rifles and shotguns
- O-ring sealed and nitrogen purged to ensure waterproof and fogproof performance

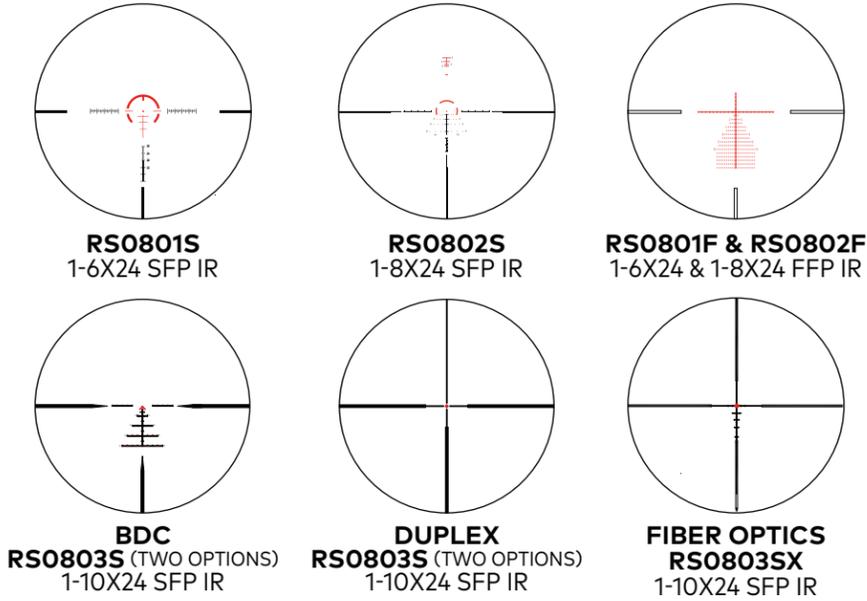

ITEM	RS0801S	RS0802S	RS0803S	RS0803SX	RS0801F	RS0802F	RS0803F
MODEL	1-6X24	1-8X24	1-10X24		1-6X24	1-8X24	1-10X24
TUBE SIZE	30mm	30mm	30mm		30mm	30mm	30mm
POWER RATIO	6x	8x	10x		6x	8x	10x
TYPE	Etched Glass	Etched Glass	Etched Glass	Fiber Optics	Etched Glass	Etched Glass	Etched Glass
CLICK VALUE	1/2 MOA	1/2 MOA	1/4 MOA		0.1 MRAD	0.1 MRAD	0.1 MRAD
FIELD OF VIEW	FT@100YDS	127.5-21.0	127.5-15.7	113.9-11.5	116.6-16.8	113.9-15	116.6-11.7
	M@100M	38.9-6.4	38.9-4.8	34.7-3.5	35.5-5.1	34.7-4.56	38.9-3.9
FOCUS SETTING	100yds	100 yds	100 yds		100 yds	100 yds	100 yds
W/E ADJUSTMENT RANGE (MOA)	±60/±60 MOA	±60/±60 MOA	±60/±60 MOA		±60/±60 MOA	±60/±60 MOA	±80/±80 MOA
EYE RELIEF (MM)	100	100	90		100	90	90-85
TURRET STYLE	Capped	Capped	Capped		Exposed	Exposed	TAC-LOK
WEIGHT / LENGTH	507g / 263mm	507g / 263mm	515g / 277mm		530g / 262mm	540g / 275mm	520g / 295mm



# BLACKIRON SERIES

## MEDIUM TO LONG RANGE SCOPE

The NUTREK BLACKIRON Series is an entry- to mid-level all-around riflescope line that meets the needs of a wide range of hunting and recreational shooting scenarios. Available in models suited for medium- to long-range shooting, the scopes come equipped with ZERO-STOP and/or TAC-LOK turrets and MRAD reticles. The BLACKIRON scopes feature a well-balanced optical design that performs well across the board. Notably, they minimize tunnel vision while providing a wide field of view for a more comfortable aiming experience.



- Versatile, all-around scope offering excellent optical performance across a wide range of shooting scenarios
- Wide field of view minimizes tunnel vision and provides a spacious, immersive sight picture
- Fully multi-coated lenses deliver a bright, sharp, and high-contrast image
- O-ring sealed and nitrogen purged for reliable waterproof and fogproof performance
- Shock-resistant build rated to 1000G, withstanding recoil from most hunting rifles and shotguns
- Etched glass reticle, precisely engraved onto a reticle for accurate measurement and alignment



ITEM	RS1402S	RS1404S	RS1406S	RS1417S	RS1420S	RS1421S	RS1422S	RS1423S
MODEL	2.5-10x50	4-16x44	6-24x50	3-18x50	1-8x24	2-16x50	3-24x56	ED 5-40x56
TUBE SIZE	30mm							
POWER RATIO	4x	4x	4x	6x	8x	8x	8x	8x
CLICK VALUE	0.1 MRAD	0.1 MRAD	0.1 MRAD	0.1 MRAD	1/2MOA	1/4MOA	1/4MOA	1/4MOA
FIELD OF VIEW	FT@100YDS	42.5-12.6	24.6-6.3	18.3-4.6	38.2-6.2	124.8-15.4	61.8-7.7	41.1-5.13
	M@100M	14.2-4.2	8.2-2.1	6.1-1.53	12.7-2.1	41.6-5.13	20.6-2.57	13.7-1.7
FOCUS SETTING	100yds	10yds-∞	10yds-∞	10yds-∞	100 yds	15yds-∞	15yds-∞	10yds-∞
W/E ADJUSTMENT RANGE (MOA)	±50/±50 MOA	±35/±35 MOA	±25/±25 MOA	±65/±65 MOA	±80/±80 MOA	±50/±50 MOA	±40/±40 MOA	±60/±60 MOA
EYE RELIEF (MM)	105-100	105-100	105-100	96-95	98-88	94-92	93-92	93-92
TURRET STYLE	TAC-LOK	ZERO-STOP	ZERO-STOP	ZERO-STOP	Capped	Capped	Capped	ZERO-STOP
WEIGHT / LENGTH	690g / 326mm	712g / 356mm	752g / 369mm	789g / 359mm	463g / 265mm	456g / 342mm	819g / 380mm	811g / 405mm



# BLACKIRON ES

## EXTRA-SHORT RIFLESCOPE

The NUTREK BLACKIRON ES series is designed for shooters who demand a lightweight, compact scope without sacrificing performance. With its extra-short overall length and reduced weight, it's perfect for dynamic shooting, mobile hunting, or tight firearm setups. Despite its size, these scopes delivers full-size power, a clear, wide field of view, and minimal tunnel vision. Built tough and compatible with most sporting firearms, including airguns, the BLACKIRON ES is the ideal scope for those who value portability and precision.



- Exceptionally short tube design with lightweight construction
- Fine-tuned optics minimize tunnel vision and deliver a clear, unobstructed field of view
- Fully multi-coated lenses provide a bright and vivid image
- Tool-free TAC-LOK turrets allow quick and precise adjustments anytime
- O-ring sealed and nitrogen-purged to ensure reliable waterproof and fogproof performance
- Rated to 1200G shock resistance, withstands recoil from most sporting firearms and airguns
- Etched glass reticle, precisely engraved onto a reticle for accurate measurement and alignment



RS1501S




RS1502F




4X POWER RATIO

KILL FLASH

ITEM	RS1501S	RS1502F
MODEL	3-12X44	4-16X44
TUBE SIZE	30mm	30mm
POWER RATIO	4x	4x
CLICK VALUE	0.1 MRAD	0.1 MRAD
FIELD OF VIEW	FT@100YDS	35.1-8.7
	M@100M	11.7-2.9
FOCUS SETTING	10yds-∞	10yds-∞
W/E ADJUSTMENT RANGE (MOA)	±45/±45MOA	±35/±35MOA
EYE RELIEF (MM)	90-85	90-85
TURRET STYLE	TAC-LOK	TAC-LOK
WEIGHT / LENGTH	513g / 243mm	552g / 268mm

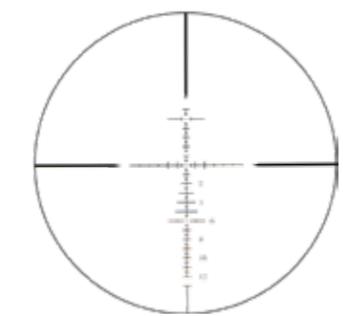

RS1501S  
3-12X44 SFP

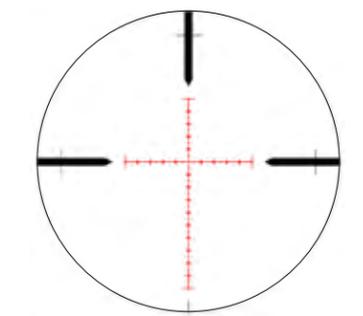

RS1502F  
4-16X44 FFP IR



## COPPERTAG SERIES

### PRECISION LONG-RANGE RIFLESCOPE

The COPPERTAG series riflescopes are medium- to long-range optics that offer a well-balanced combination of performance and affordability. Featuring premium-quality lenses for exceptional clarity and brightness, first focal plane reticles that stay true at all magnifications, and a zero-stop tactical elevation turret for precise long-distance adjustments, the COPPERTAG scopes ensure superior shooting accuracy across diverse scenarios. Equipped with a side focus parallax adjustment for enhanced precision at varying ranges, these scopes are built for shooters who demand both optical excellence and reliable tactical features.



- Illuminated First Focal Plane (FFP) reticle ensures accurate holdovers at all magnification levels
- Extra-wide field of view eyepiece minimizes tunnel vision for a more immersive sight picture
- ZERO-STOP tactical elevation turret enables precise and repeatable adjustments
- Side focus parallax adjustment enhances target clarity at various distances
- O-ring sealed and nitrogen-purged for dependable waterproof and fogproof performance
- Shock-resistant construction rated to 1000G to withstand heavy recoil from most centerfire rifles
- Etched glass reticle, precisely engraved onto a reticle for accurate measurement and alignment




RS1901FI



RS1903FI



	ITEM	RS1901FI	RS1903FI	RS1905FI
	MODEL	3-18X50	5-25X56	7-35x56
	TUBE SIZE	30mm	34MM	34MM
	POWER RATIO	6x	5x	5x
	CLICK VALUE	1/10 MIL	1/10 MIL	1/10 MIL
FIELD OF VIEW	FT@100YDS	38.3-6.3	23.5-4.7	16.7-3.4
	M@100M	12.8-2.1	7.83-1.57	5.6-1.13
	FOCUS SETTING	10yds-∞	10 yds-∞	30yds-∞
	W/E ADJUSTMENT RANGE (MOA)	±35/±50MOA	±40/±55MOA	±15/±30MOA
	EYE RELIEF (MM)	96-95	96-95	90
	TURRET STYLE	Zero-Stop	Zero-Stop	Zero-Stop
	WEIGHT / LENGTH	813g / 349mm	845g / 358mm	860g / 375mm

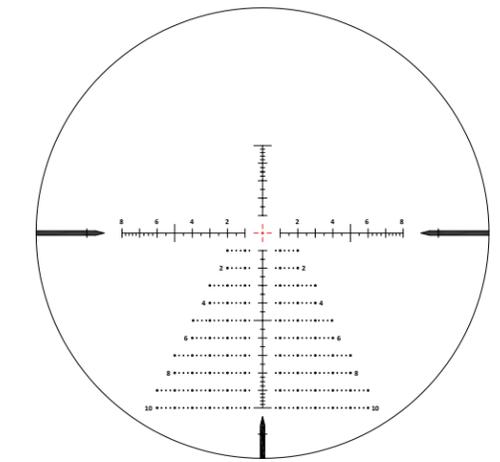

FFP IR RETICLE  
RS1901FI & RS1903FI



## SILVERMARK SERIES

### ED GLASS PRECISION HUNTING SCOPE


The SILVERMARK Series riflescopes are built to handle everything from close-range hunting to long-distance precision shooting. Featuring extra-low dispersion (ED) glass and an optimized optical system, they deliver an exceptionally wide field of view and outstanding image clarity. With a range of models available, the SILVERMARK Series offers versatile options for woodland stalking, open-field hunts, mountain shooting, and even long-range sniping.



- Extra-low Dispersion (ED) glass delivers clear, bright images even in low-light conditions
- Ultra-wide field of view and generous eye relief for comfortable observation and quick target acquisition
- Illuminated First Focal Plane (FFP) reticle ensures accurate holdovers at any magnification (available on higher-power models)
- TAC-LOK tactical turrets allow quick and precise ballistic adjustments in the field
- O-ring sealed and nitrogen purged, ensuring reliable waterproof and fogproof performance
- Shock-resistant up to 1200G, built to withstand the recoil of most high-caliber hunting rifles
- Etched glass reticle, precisely engraved onto a reticle for accurate measurement and alignment




**RS2105**  
1.7-10X40 SFP IR FIBER



**RS2106**  
3-18X44 FFP IR



**RS2109**  
4.5-27X56 FFP IR



**RS2110**  
5-30X56 FFP IR

ITEM	RS2105	RS2106	RS2109	RS2110	RS2111	
<b>MODEL</b>	1.7-10x40	3-18x44	4.5-27X56	5-30X56	6-36X56	
<b>TUBE SIZE</b>	30mm	34mm	34mm	34mm	34mm	
<b>POWER RATIO</b>	6x	6x	6x	6x	6x	
<b>CLICK VALUE</b>	0.1MRAD	0.1MRAD	0.1MRAD	0.1MRAD	0.1MRAD	
<b>Field Of View</b>	<b>ft@100yds</b>	73.7-12.6	42-6.96	27.77-4.61	25.15-4.19	20.95-3.51
	<b>m@100m</b>	24.6-4.2	14-2.32	9.26-1.54	8.38-1.4	6.98-1.17
<b>Focus Setting</b>	100yds	10yds-∞	10yds-∞	10yds-∞	10yds-∞	
<b>W/E Adjustment Range (MOA)</b>	±65/±65MOA	±70/±70MOA	±50/±50MOA	±45/±45MOA	±40/±40MOA	
<b>EYE RELIEF (MM)</b>	95	95	95	95	95	
<b>TURRET STYLE</b>	Capped	TAC-LOK	TAC-LOK	TAC-LOK	TAC-LOK	
<b>WEIGHT / LENGTH</b>	704g / 280mm	N/A / 337mm	958g / 365mm	N/A / 365mm	N/A / 384mm	




## AUROMAC SERIES

### ED GLASS TACTICAL PRECISION SCOPE

The AUROMAC Series represents the pinnacle of optical and mechanical performance in the NUTREK riflescope lineup. Featuring premium Extra-low Dispersion (ED) glass, these scopes deliver exceptionally clear and bright images, even in low-light environments. Built with a robust 34mm one-piece aluminum alloy tube, the AUROMAC scopes offer enhanced durability and higher torque tolerance for secure mounting, ensuring long-term stability and consistent precision in demanding shooting applications.



- Extra-low Dispersion (ED) glass delivers sharp, high-contrast images—even at extended distances
- Illuminated First Focal Plane (FFP) reticle ensures precise holdovers and accurate long-range zeroing
- Robust 34mm one-piece tube maximizes light transmission and enhances structural integrity
- Zero-Stop elevation turret allows rapid, repeatable ballistic adjustments in dynamic scenarios
- Shock-resistant construction rated up to 1200G to withstand recoil from high-caliber rifles
- O-ring sealed and nitrogen purged for reliable waterproof and fogproof performance

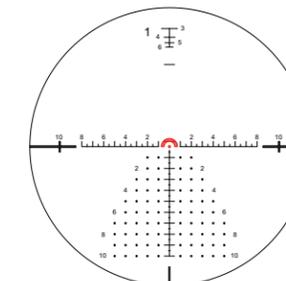

**RS1801F**  
1-10X28 FFP IR



**RS1802F**  
6-24X50 FFP

ITEM		RS1801F	RS1802F	RS1802FI
MODEL		1-10x28	6-24x50	6-24x50
TUBE SIZE		34mm	34mm	34mm
POWER RATIO		10x	4x	4x
CLICK VALUE		0.1MRAD	0.1MRAD	0.1MRAD
Field Of View	ft@100yds	122.1-12	20.9-5.2	20.9-5.2
	m@100m	40.7-4	6.96-1.74	6.96-1.74
Focus Setting		100yds	25yds-∞	25yds-∞
W/E Adjustment Range (MOA)		±100/±100MOA	±50/±50 MOA	±50/±50 MOA
EYE RELIEF (MM)		95	88.9	88.9
TURRET STYLE		Capped	Zero-Stop	Zero-Stop
WEIGHT / LENGTH		N/A / 259mm	1037g / 358mm	1045g / 358mm

# CARBON FIBER BIPODS

EXTRA LIGHT-WEIGHT; ROCK SOLID; ALL TERRAIN



CARBONSTRIKE RAPIDSTALK  
**8-11 INCH BIPOD BPW0811P**



CARBONSTRIKE TACTICS  
**8-11 INCH BIPOD BPV0811P**

## FEATURES

- ① Adjustable height from 8 to 11 inches (20~28cm)
- ② Picatinny mount with tool-free QD lock
- ③ Tilt 20° left or right for varied shooting angle
- ④ Light-weight & robust carbon fiber legs
- ⑤ Legs can be positioned at various angles
- ⑥ Anti-slip Rubber Feet replaceable with Spike Feet

## MOUNT TYPE

Easily switch from Picatinny to M-Lok compatibility.  
(M-Lok adapter sold separately).



**BAP15**  
M-LOK Mount  
(Optional Items)

MODEL	MOUNT TYPE	LEG EXTENSION	TILT ANGLE	WEIGHT (G)	LEG OPERATION
BPV0811P	Picatinny	Pull to extend Press button to retrieve	±40°	339g	Manual, Lockable & Foldable 7 position: 0°, 30°, 60°, 90°, 120°, 150°, 180°
BPW0811P	Picatinny	Pull to extend Spin to lock	±40°	290g	

## PRODUCT FEATURES



Left/right tilt 20°



Press the button to change the angle of the leg



Multiple height 8''-11''



Non-slip rubber feet for hard surfaces

Spike and rubber feet for good stability

# CARBON FIBER BIPODS

## CARBONSTRIKE CLASSIC BPA

- Light-weight & robust carbon fiber legs
- Provides stable shooting support with convenient attachment to a swivel stud
- Legs spring to full extended shooting position with just a press of button
- Rubber padded on top protects firearms forend & quality material proves prolonged tough service
- Foldable legs for convenient carry & soft rubber for enhanced stability
- Adjustable legs with spring return lets you shoot at adjustable height



CARBONSTRIKE CLASSIC  
**6-9 INCH BIPOD BPA0609C**



CARBONSTRIKE CLASSIC  
**9-13 INCH BIPOD BPA0913C**



CARBONSTRIKE CLASSIC  
**13-21 INCH BIPOD BPA1321C**

MODEL	MOUNT TO	ROTATION	TILT	WAY OF EXTENSION	ROTATION LOCK	TILT LOCK	MOUNT LOCK	HEIGHT (INCH)		WEIGHT (G)
								RETRACTED	EXTENDED	
BPA0609C	Harris Style Swivel Stud	Fixed	Fixed	Press button to extend	N/A	N/A	Screw Nut	6.0	9.0	256
BPA0913C	Harris Style Swivel Stud	Fixed	Fixed	Press button to extend	N/A	N/A	Screw Nut	9.0	13.0	303
BPA1321C	Harris Style Swivel Stud	Fixed	Fixed	Press button to extend	N/A	N/A	Screw Nut	13.7	21.0	337

# CARBON FIBER BIPODS

## CARBONSTRIKE LEGACY BPB

- Carbon Fiber leg for light weight and enhanced rigidity
- Provides stable shooting support with convenient attachment to a swivel stud
- Mount to Harris style firearm swivel stud, or use a picatinny bipod adapter (not included) to mount to picatinny rail
- Able to tilt 25 degrees to either side for level position on uneven surface Legs spring to full extended shooting position with just a press of button
- Multi-section leg extension let you shoot at adjustable height
- Adopts quality material for prolonged tough service
- Soft rubber shoes for the feet enhanced stability
- Padded bipod base protects forend of firearms
- Foldable legs for convenient carry of firearm



CARBONSTRIKE LEGACY  
**6-9 INCH TILT-LEVER BIPOD BPB0609C**



CARBONSTRIKE LEGACY  
**9-13 INCH TILT-LEVER BIPOD BPB0913C**



CARBONSTRIKE LEGACY  
**13-21 INCH TILT-LEVER BIPOD BPB1321C**

MODEL	MOUNT TO	ROTATION	TILT	WAY OF EXTENSION	ROTATION LOCK	TILT LOCK	MOUNT LOCK	HEIGHT (INCH)		WEIGHT (G)
								RETRACTED	EXTENDED	
BPB0609C	Harris Style Swivel Stud	Fixed	Yes	Press button to extend	N/A	Screw Nut	N/A	6.1	8.9	290
BPB0913C	Harris Style Swivel Stud	Fixed	Yes	Press button to extend	N/A	Screw Nut	N/A	8.7	14.1	351
BPB1321C	Harris Style Swivel Stud	Fixed	Yes	Press button to extend	N/A	Screw Nut	N/A	13.2	20.3	397